


KEYNOTES

NOTES ARE NOT IN ANY SPECIFIC ORDER OR RELATED TO SPECIFIC WORK.
SOME NUMBERS MAY BE SKIPPED AND THE SAME NUMBER ON MULTIPLE
SHEETS MAY HAVE A DIFFERENT NOTATION.

PROPOSED

- 165 TIE TO SA MAIN (UNKNOWN CONFIGURATION)
- 187 POTHOLE FOR FIELD VERIFICATION
- 200 SANITARY SEWER MANHOLE
- 203 SINGLE CLEANOUT
- 205 DOUBLE CLEANOUT
- 208 DOUBLE 45° DROP AS NEEDED
- 210 8" PVC SEPARATOR DRAIN PIPE
- 214 6" PVC SANITARY SEWER SERVICE PIPE
- 217 4" PVC PIPE @ 2.00% GRADE TO MH
- 220 4" PVC "Y" W/ 45° FITTING BEND
- 223 SERVICE LINE FROM INTERIOR (SEE M.E. PLANS)

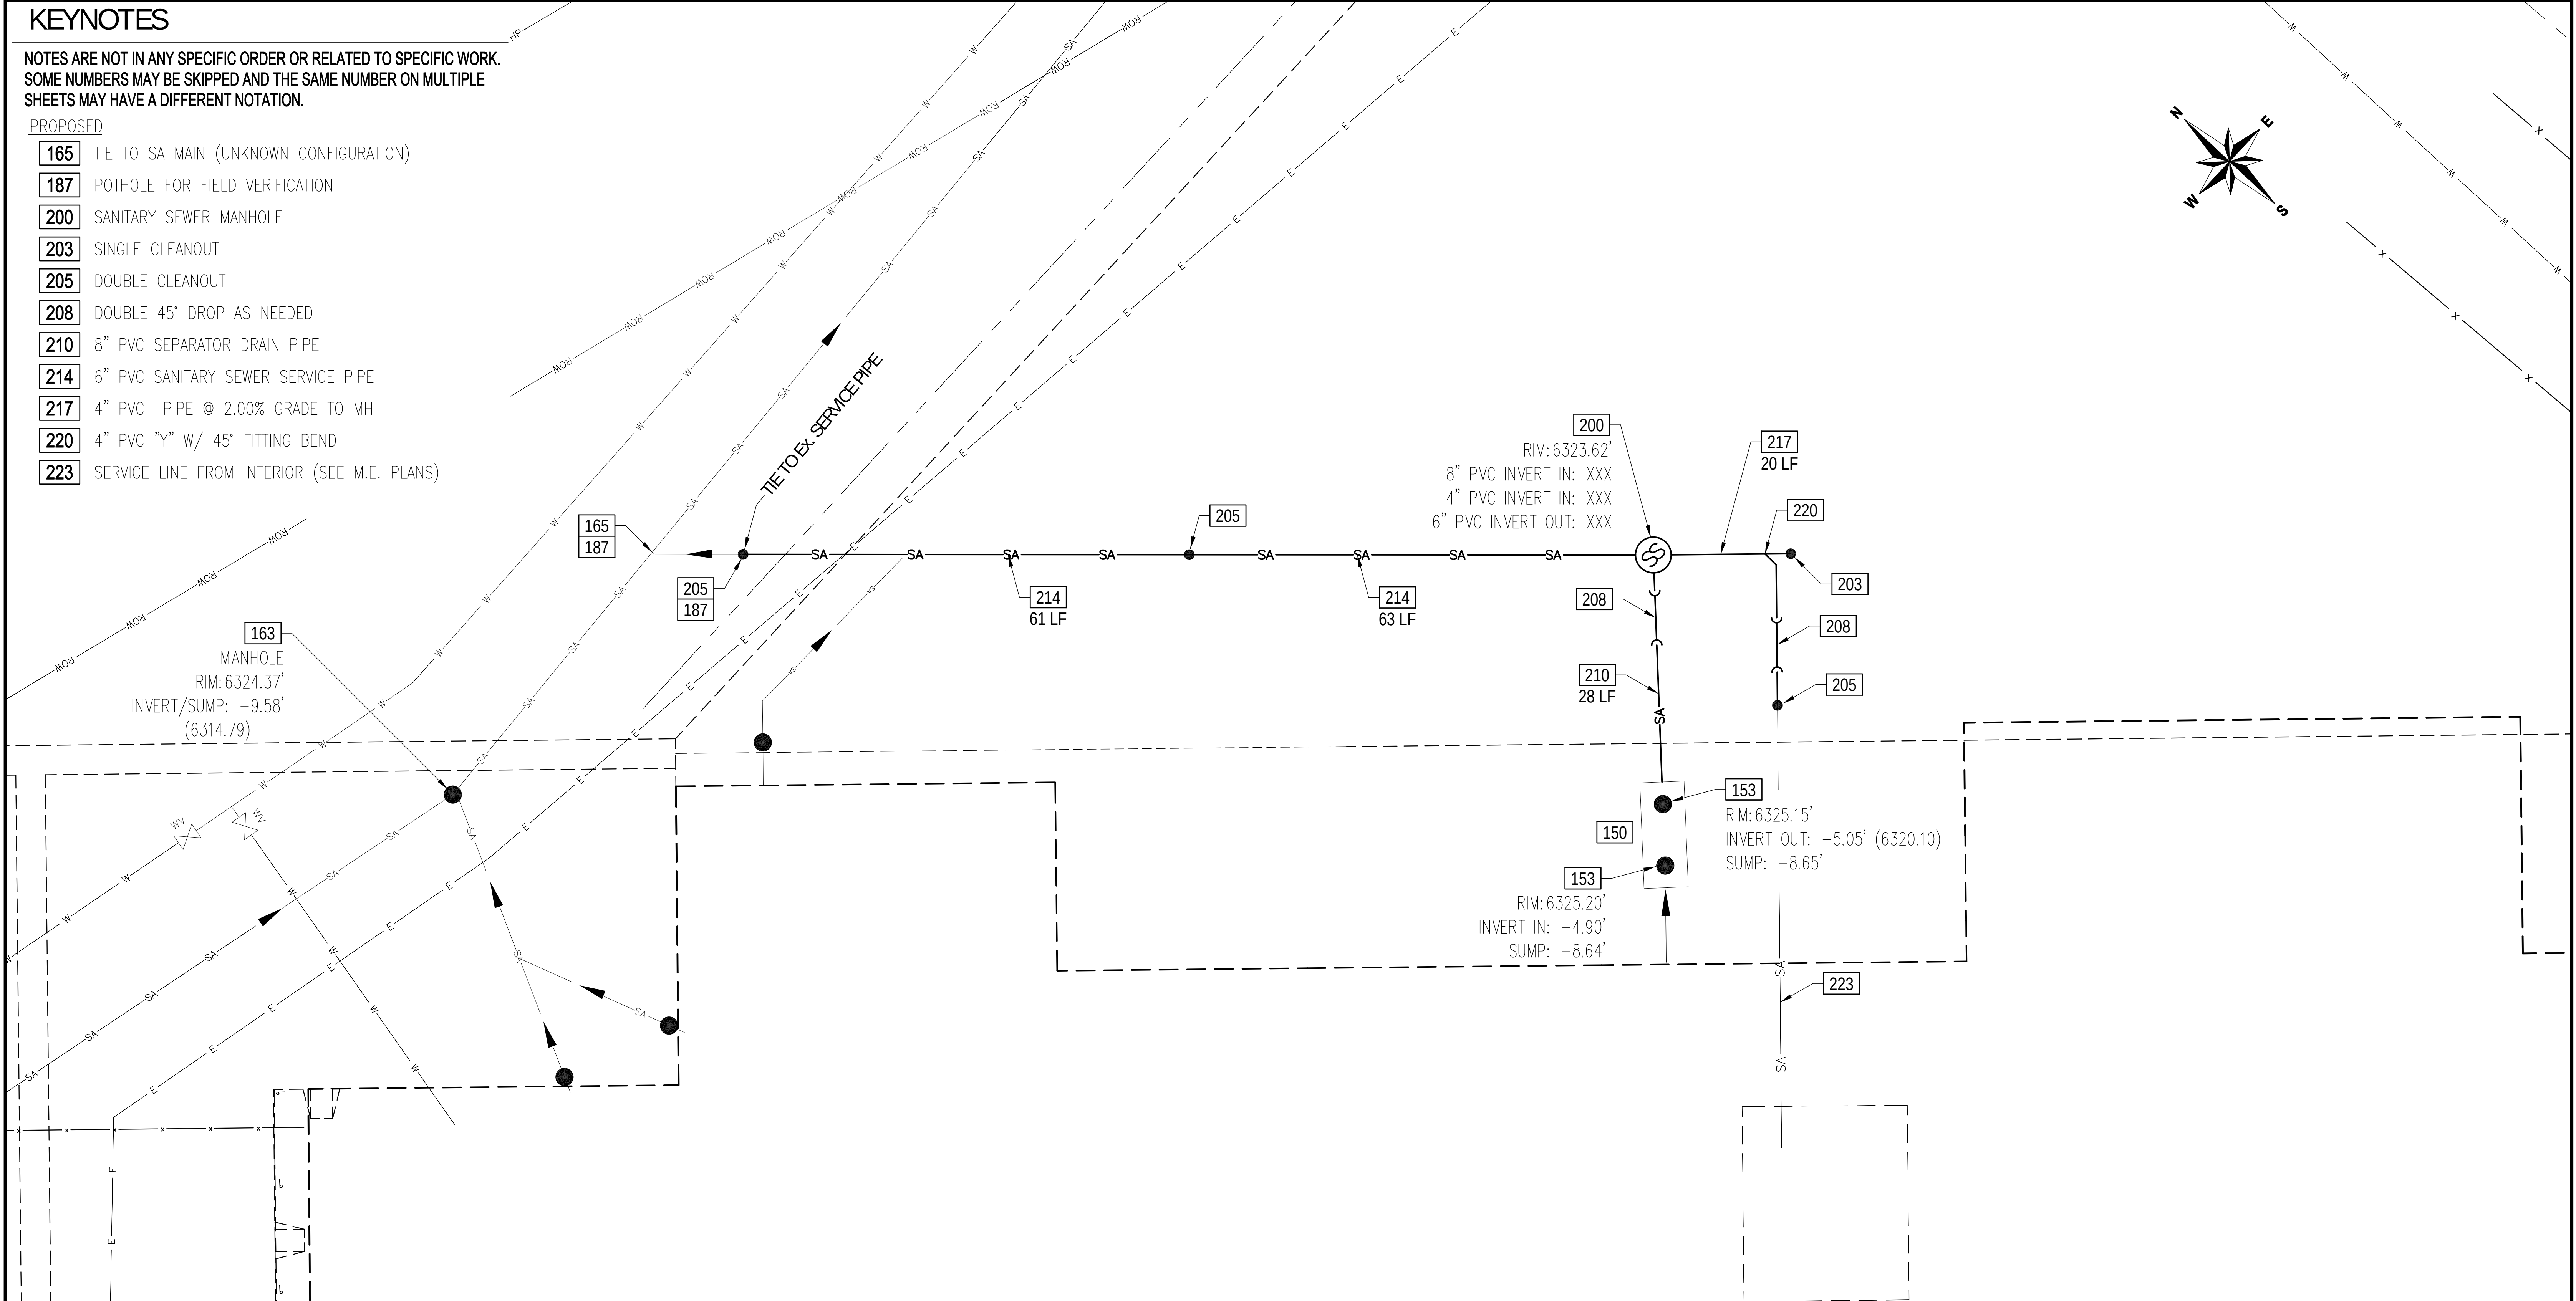

CTE BUILDING



PRINTED: 05/14/2026 FOR
DATE

☒ PRELIMINARY
☒ DESIGN DEVELOPMENT
☐ BIDDING
☐ CONSTRUCTION
☐ APPROVAL
☐ AS BUILT
☐ REVISION

No.		BY	DATE	APPD.
1	PRELIMINARY SA SYSTEM DEMOLITION AND RECONSTRUCTION PLAN FOR OWNER APPROVAL	BLS	05/15/26	-
0	FACILITY AS-BUILT PROVIDED BY EDA	BLS	04/26	-
REVISIONS				

TITLE: **SWEETWATER COUNTY SCHOOL DISTRICT #1
CTE Building
PROPOSED SITE / SANITARY SEWER PLAN**

Drawn By: _	Date 04/26	Engr. _	Date 04/26
Chk'd. By: _	Date _	Appd. _	Date 04/26
Project No. 26-04-166		Scale 3/32" = 1'-0"	

DRAWING No. **C-200**

REVISION **1**