




I HEREBY CERTIFY THAT THIS PLAN, SPECIFICATION, OR REPORT WAS PREPARED BY ME OR UNDER MY DIRECT SUPERVISION AND THAT I AM A SOLE LICENSED LANDSCAPE ARCHITECT UNDER THE LAWS OF THE STATE OF MINNESOTA.

JAY R. POMEROY
LIC. NO. 23543
DATE 03/18/2026

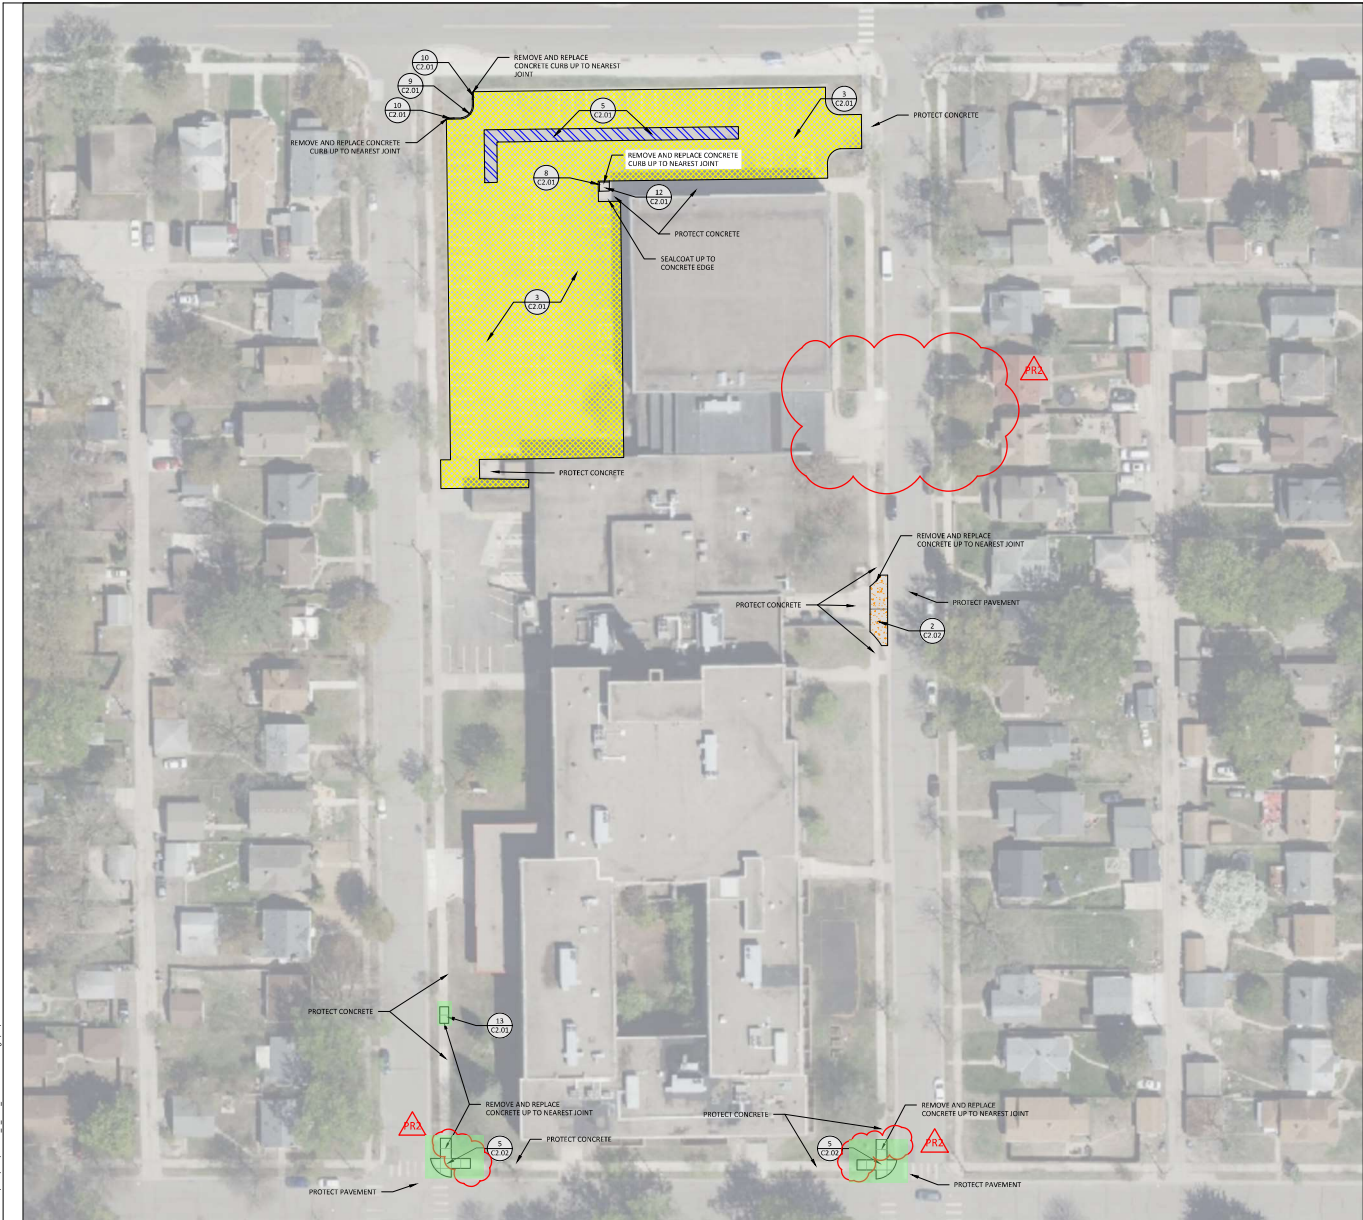

3300 FERNBROOK LANE NORTH, SUITE 300
PLYMOUTH, MN 55447
Phone: (763) 544-7129
Email: Plymouth@bolton-menk.com
www.bolton-menk.com

REVISION	BY	DATE	DESCRIPTION
CDL	PR2	03/18/2026	PR-2
CCA			
JRP			
26X142109000			

NOTES

1. REFER TO SHEET T0.01, TITLE SHEET, FOR RELATED GENERAL NOTES.
2. CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS PRIOR TO THE BIDDING.
3. CONTRACTOR SHALL BE RESPONSIBLE FOR SHOOTING AND RECORDING EXISTING PAVEMENT SURFACE ELEVATIONS. ONCE BITUMINOUS PAVEMENT HAS BEEN REMOVED, THE CONTRACTOR SHALL BE RE-ESTABLISH ELEVATIONS THAT WILL ENSURE POSITIVE DRAINAGE AS APPROPRIATE.
4. RESTRIPE PARKING LOT STALLS AS APPLICABLE. OBSERVE AND MAP EXISTING PRIOR TO BEGINNING WORK.

LEGEND


REFERENCE KEY TO SITE DETAILS	DETAIL L.D. NUMBER (TOP)	DETAIL SHEET NUMBER (BOTTOM)
PROPOSED CONCRETE WALK	10	11
PROPOSED CONCRETE SLAB	12	13
PROPOSED MEDIUM DUTY ASPHALT PAVEMENT	14	15
PROPOSED ASPHALT PAVEMENT CRACK FILL / SEALCOAT	16	17

CAMDEN HIGH SCHOOL QUANTITIES

THE CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS, INCLUDING DETERMINATION OF ALL QUANTITIES, PRIOR TO THE WORK. BASE BID AMOUNT INCLUDES ALL WORK TO ACCOMPLISH THAT WHICH IS ILLUSTRATED ON THE PLAN, UNLESS OTHERWISE NOTED.

"ESTIMATED" QUANTITIES PROVIDED ARE FOR THE CONTRACTOR'S REFERENCE ONLY.
"ASSUMED" QUANTITIES SHALL BE INCLUDED IN THE CONTRACTOR'S BASE BID COST.
FINAL QUANTITIES WILL BE ADJUSTED USING UNIT PRICES.

1. NORTH PARKING LOT
 - 1.1. ESTIMATED BITUMINOUS SEAL COAT/FOG SEAL = 3,700 S.Y.
 - 1.2. ASSUMED BITUMINOUS CRACK SEAL = 400 L.F.
 - 1.3. ASSUMED MEDIUM DUTY PAVEMENT REPAIR = 200 S.Y.
2. CONCRETE REPAIR
 - 2.1. ASSUMED CONCRETE CURB AND GUTTER = 300 S.F.
 - 2.2. ASSUMED CONCRETE WALK REPAIR = 630 S.F.
 - 2.3. ASSUMED CONCRETE SLAB REPAIR = 150 S.F.



MINNEAPOLIS PUBLIC SCHOOLS

FY26 SITE WORK

CAMDEN HIGH SCHOOL

SHEET

C1.01