




H:\Projects\12000\12528\Design\CAD_BIM\Sheets DWGs\Anwatin.dwg : 8.5 X11 HORZ

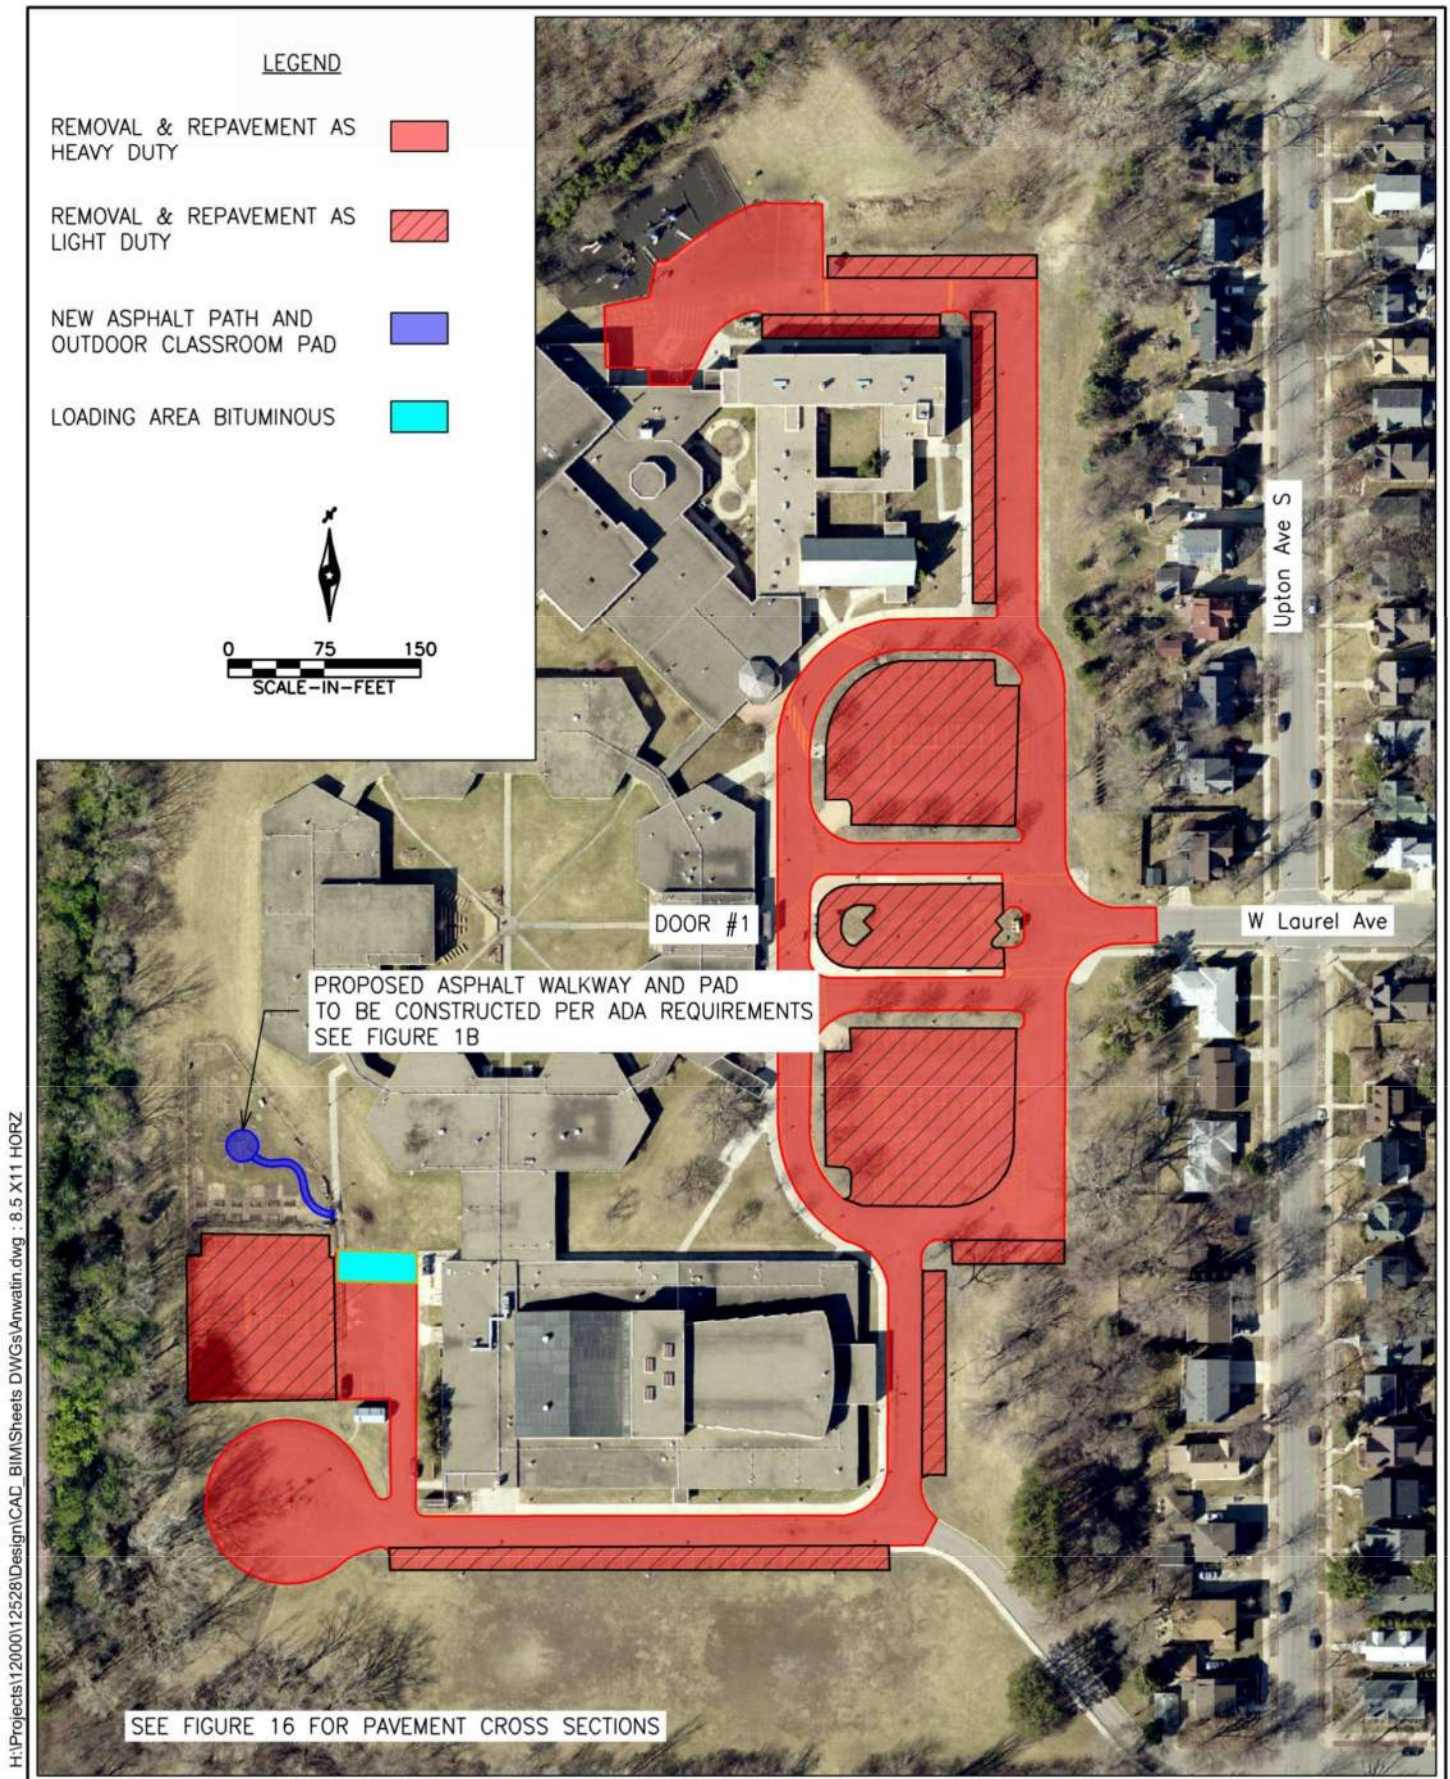

FY19 Site Improvements - Zone 1 - Anwatin Middle School

Site Plan
Minneapolis, Minnesota

Figure 1A



Job # 12528
3/29/2019 - 9:43AM

LEGEND

REMOVAL & REPAVEMENT AS
LIGHT DUTY



NEW ASPHALT PATH AND
OUTDOOR CLASSROOM PAD

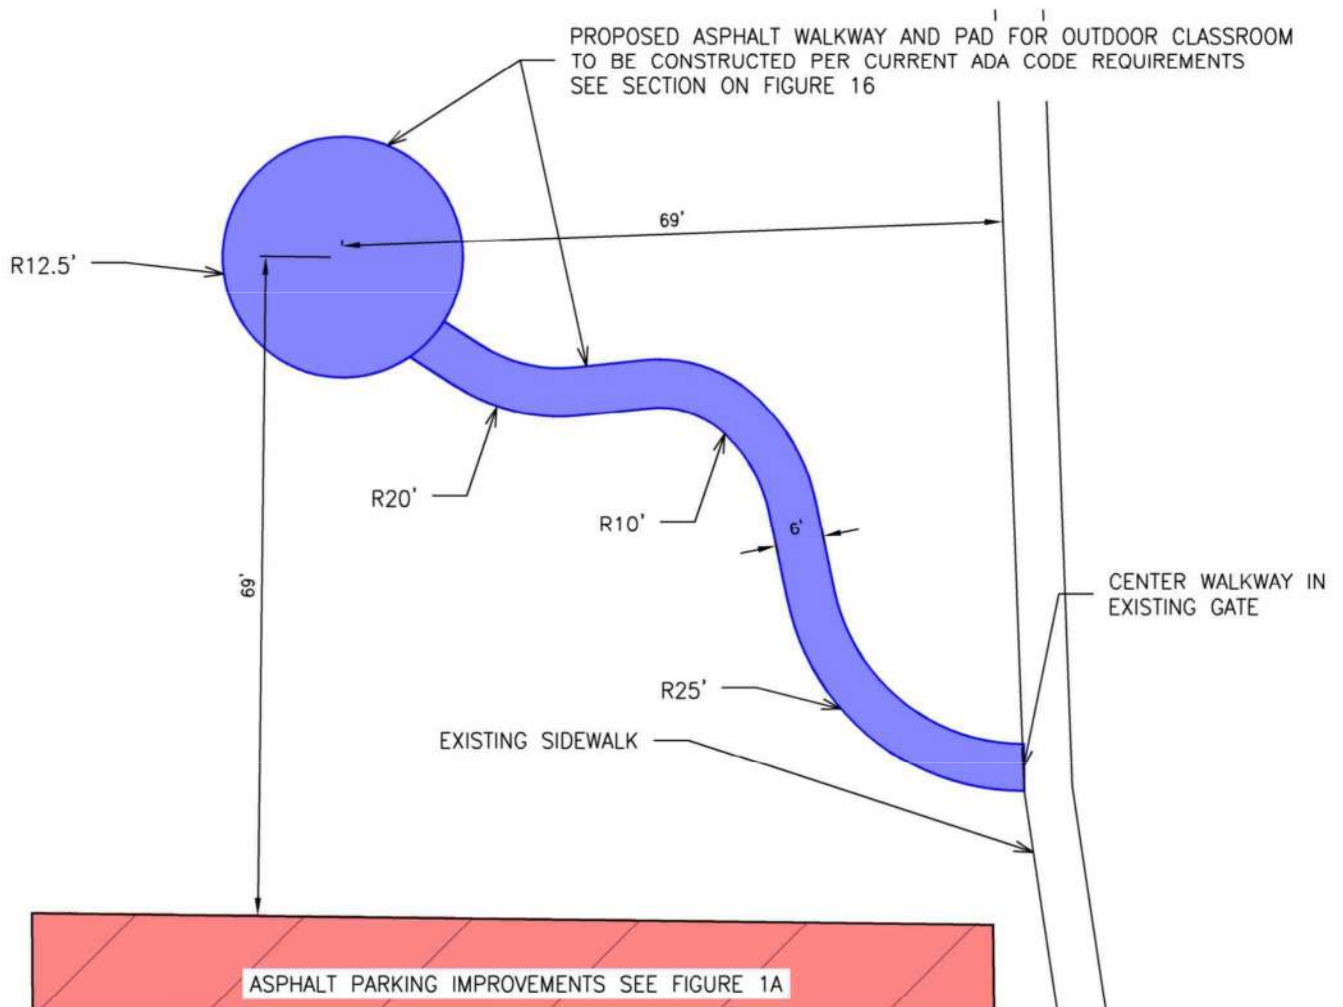

H:\Projects\12000\12528\Design\CAD_BIM\Sheets DWGs\Anwatin.dwg : CLASSROOM



FY19 Site Improvements - Zone 1 - Anwatin Middle School

Asphalt Walkway and Pad Plan
Minneapolis, Minnesota

Figure 1B

ANWATIN MIDDLE SCHOOL WORK SUMMARY

- Perform survey to establish surface elevations of the existing pavement in order to reestablish elevations after bituminous removals.
- Remove existing bituminous surface as indicated on Figure 1A. Bituminous depths appear to range between 4 and 6 inches.
- Perform a proof roll on the existing aggregate base after bituminous removal. During proof roll, Engineer will mark up to 4,000 square yards of subgrade correction areas. A correction depth of 12" shall be preformed in the areas identified per the detail on Figure 16B.
- The loading dock bituminous area (as identified on Figure 1A) shall be provided with a 24" depth subgrade correction per the detail on Figure 16B. The area of this subgrade correction is 146 square yards.
- Supplement the existing aggregate base as needed to achieve grades with MnDOT Class 5 or 7 aggregate base material.
- Pave new bituminous surface matching existing grades and drainage patterns. Bituminous depths per Figures 16A and 16B.
- Replace existing striping matching locations and colors.
- Construct bituminous walkway and pad for outdoor classroom as indicated on Figure 1B. Walkway and pad shall be constructed to meet ADA accessibility requirements. Follow existing ground elevations as closely as possible while still meeting ADA requirements. Top surface of walkway and pad to be approximately ½" above exiting ground surface.

H:\Projects\12000\12528\Design\CAD_BIM\Sheets DWGs\Anwatin.dwg : SPEC



FY19 Site Improvements - Zone 1 - Anwatin Middle School

Pavement Information
Minneapolis, Minnesota

Figure 1C

Job # 12528
3/29/2019 - 9:46AM