




1. REFER TO GENERAL NOTES ON SHEET 2E0.1 FOR ADDITIONAL CRITERIA.
2. WORK TO BE COMPLETED PRIOR TO DEMO OF OLD ADMIN BUILDING AND AFTER COMPLETION OF NEW ADMIN BUILDING AND CLASSROOM.
3. CONTRACTOR SHALL EXERCISE EXTREME CAUTION IN EXCAVATING AND TRENCHING ON THIS SITE TO AVOID EXISTING DUCTS, PIPING OR CONDUITS, ETC. AND TO PREVENT HAZARDS TO PERSONNEL AND/OR DAMAGE TO EXISTING UNDERGROUND UTILITIES OR STRUCTURES WHETHER OR NOT SHOWN AND INSTALLED BY ANOTHER CONTRACT. CONTRACTOR SHALL PERFORM AN UNDERGROUND SURVEY PRIOR TO EXCAVATION. IF THE UNDERGROUND UTILITIES OR STRUCTURES WHETHER OR NOT SHOWN OR DETAILED AND INSTALLED BY OTHER CONTRACTS. THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE ENGINEER SHOULD SUCH UNIDENTIFIED CONDITIONS BE DISCOVERED. THESE DRAWINGS AND SPECIFICATIONS DO NOT INCLUDE THE NECESSARY ELEMENTS FOR CONSTRUCTION SAFETY.
4. EXISTING UNDERGROUND UTILITIES ARE PRESENT, BUT THEIR EXACT LOCATION ARE NOT SHOWN. CONTRACTOR SHALL LOCATE AND PROTECT BEFORE TRENCHING OR EXCAVATING IN ANY AREA. CONSULT UTILITY COMPANIES, "AS-BUILT" DRAWINGS, AND SCHOOL MAINTENANCE PERSONNEL FOR LOCATION OF EXISTING UNDERGROUND WORK. IF EXISTING PIPING OR UTILITIES ARE DAMAGED DURING CONSTRUCTION, CONTRACTOR SHALL REPAIR OR REPLACE AT OWNERS EXPENSE. NEW UNDERGROUND SHALL BE MODIFIED AS NECESSARY TO CONFORM TO EXISTING CONDITIONS.
5. INFORMATION GIVEN, CONCERNING EXISTING ELECTRICAL INSTALLATION IS AS EXACT AS COULD BE SECURED, BUT EXTREME ACCURACY IS NOT GUARANTEED. CONTRACTOR SHALL VISIT THE JOB SITE PRIOR TO BIDS TO CONFIRM CONDITIONS UNDER WHICH THE WORK IS TO BE PERFORMED.
6. PROVIDE TRAFFIC RATED (H/20 LOAD) COVER AND BOXES FOR ALL PULL BOXES UNLESS SPECIFICALLY NOTED OTHERWISE.


1	PROVIDE WIRING IN (E) CONDUIT PER SITE DIAGRAMS.
2	SIGNAL FEEDER PER SITE DIAGRAMS.
3	REMOVE (E) CLOCKS AND SPEAKERS. REMOVE WIRING BACK TO SOURCE. (N) IF CLOCKS AND SPEAKERS TO BE OFI
4	RELOCATE (E) INTRUSION ALARM CONTROL PANEL TO MDF ROOM IN NEW ADMIN BUILDING.
5	LOCATE (E) STUBS AND EXTEND.
6	REMOVE (E) WIRING. ABANDON (E) CONDUITS.
7	FA EXTERIOR SPEAKER PER FIRE ALARM FLOOR PLAN COVERING THE PLAY APPARATUS AREAS AND THE (E) SHADE STRUCTURE.
8	FA EXTERIOR SPEAKER PER DSA APPLICATION 02-121025 COVERING THE PLAY APPARATUS AREAS AND THE (E) SHADE STRUCTURE.

ARCHITECT	ENGINEER
	
	07/10/2026

GENERAL NOTES	1.	This sheet is part of a set and is not to be used alone.
	2.	This sheet is not to be used for construction unless the architect's stamp and signature appear on the drawings and the status box indicated drawings have been released for construction.
	3.	These plans and prints thereof, as instruments of service, are owned by the architect and are for use on this project only. Reproduction and/or distribution without the prior written consent of the architect is forbidden.
	4.	Copyright Studio W Associates, Inc. 2022.

[illegible]

DRAWING STATUS		DATE
☐	DSA PLAN CHECK	03/16/2026
☒	DSA BACK CHECK	07/13/2026
☐	BIDDING	
☐	CONSTRUCTION	

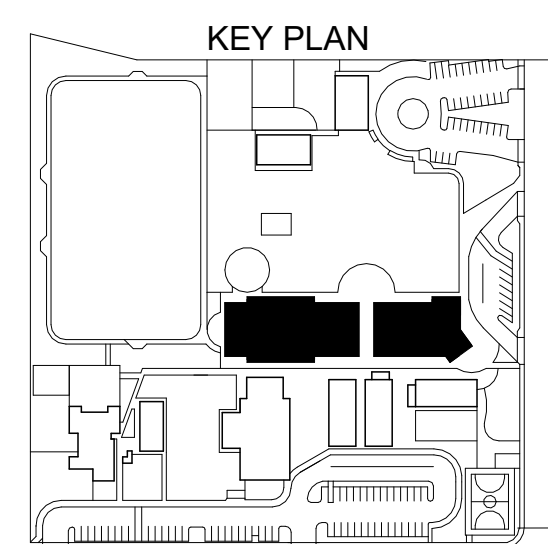

FOLSOM CORDOVA
UNIFIED SCHOOL
DISTRICT
1965 BIRKMONT DRIVE
RANCHO CORDOVA, CA 95742

DSA RESUBMITTAL

CORDOVA VILLA
ELEMENTARY SCHOOL
MODERNIZATION INCREMENT 2
10359 S WHITE ROCK ROAD
RANCHO CORDOVA, CA 95670

SIGNAL SITE PLAN (PHASE 1.2)

Date	Project Number
07/13/2026	25010.1
Application Number	Drawing Number
02-123800	2E1.2.1
Drawn	ERIC, ISAAH, BRANDON
Author	Checker



Know what's below.
Call before you dig.

