



October 14, 2026

Will Wenzloff
Hillsboro School District
4901 SE Witch Hazel Road
Hillsboro, Oregon 97123

Via email: wenzloffw@hsd.k12.or.us

Regarding: Drinking Water Sampling Report
RA Brown Middle School
1505 SE Cornelius Pass Road
Hillsboro, Oregon
Apex Project No. 26010605 / 0009

Dear Mr. Wenzloff:

On September 12 and October 3, 2026, Apex Companies LLC (Apex) collected drinking water samples at RA Brown Middle School in Hillsboro, Oregon. The testing was requested by Hillsboro School District as part of their efforts to ensure that concentrations of lead in drinking water at the school remain below the Oregon Department of Education (ODE) action level of 10 parts per billion (ppb).

Seven fixtures were not working during the initial round of sampling on September 12th. Three of those fixtures were repaired and subsequently sampled on October 3rd. The four remaining fixtures have been turned off at the request of school staff and will be sampled if they are ever returned to service. In addition, four fixtures have been removed since the previous round of school-wide sampling was completed in 2021.

Water from all fixtures in the school used for drinking or food preparation have lead concentrations below 10 ppb.

Ninety-nine samples were collected and delivered under chain of custody to Apex Laboratories in Tigard, Oregon, for lead analysis. The results of the sampling is shown in the table below.

Round 1 – September 12, 2026

Fixture Number	Sample Number	Location / Room No.	Results (ppb)
001		Main entrance drinking fountain – left – NOT WORKING	
002	22391700-002DW26A	Main entrance drinking fountain - right	ND
003	22391700-003KF26A	Cafeteria snack shop– sink faucet	6.04
004	22391700-004KF26A	Kitchen, east office sink	3.71
005	22391700-005KF26A	Kitchen, front (south) prep sink	0.594
006	22391700-006KF26A	Kitchen, back (north) prep sink	ND
007	22391700-007BF26A	Kitchen office restroom sink	0.475

Fixture Number	Sample Number	Location / Room No.	Results (ppb)
008	22391700-008CF26A	Stage attic boys dressing room sink	0.964
009	22391700-009CF26A	Stage attic girls dressing room sink	0.730
010	22391700-010DW26A	Choir Room drinking fountain	0.499
011	22391700-011CF26A	Choir Room classroom faucet	0.236
012	22391700-012BF26A	Girls restroom north of kitchen, restroom sinks - left to right (1)	ND
013	22391700-013BF26A	Girls restroom north of kitchen, restroom sinks - left to right (2)	ND
014	22391700-014BF26A	Girls restroom north of kitchen, restroom sinks - left to right (3)	ND
015	22391700-015BF26A	Girls restroom north of kitchen, restroom sinks - left to right (4)	ND
016	22391700-016BF26A	Boys restroom north of kitchen, restroom sinks - left to right (1)	ND
017	22391700-017BF26A	Boys restroom north of kitchen, restroom sinks - left to right (2)	ND
018	22391700-018BF26A	Boys restroom north of kitchen, restroom sinks - left to right (3)	0.228
019	22391700-019BF26A	Boys restroom north of kitchen, restroom sinks - left to right (4)	0.225
020	22391700-020DW26A	Room G2, Art, drinking fountain	ND
021	22391700-021CF26A	Room G2, Art, sink faucet - left	ND
022	22391700-022CF26A	Room G2, Art, sink faucet - right	ND
023	22391700-023WB26A	Hallway at gym – water bottle filler	ND
024	22391700-024DW26A	Hallway at gym – drinking fountain	ND
025		NW corner of main gym – drinking fountain – OFF BY REQUEST	
026	22391700-026BF26A	Boys locker room restroom sink faucet - left	ND
027	22391700-027BF26A	Boys locker room restroom sink faucet - right	0.406
028	22391700-028WB26A	Hallway north of locker rooms – water bottle filler	ND
029	22391700-029DW26A	Hallway north of locker rooms, drinking fountain - left	0.953
030	22391700-030DW26A	Hallway north of locker rooms, drinking fountain - right	ND
031	22391700-031BF26A	Girls locker room restroom sink faucet - left	0.629
032	22391700-032BF26A	Girls locker room restroom sink faucet - right	0.364
033	22391700-033DW26A	Upper gym, west wall, drinking fountain	ND
034	22391700-034DW26A	Room G3, drinking fountain	0.809
035		Room G3, classroom faucet – NOT WORKING	
036	22391700-036DW26A	Room G4, drinking fountain	0.480
037	22391700-037CF26A	Room G4, classroom faucet	0.213
038	22391700-038CF26A	Room G5, classroom faucet	ND
039	22391700-039DW26A	Room G6, drinking fountain	0.235
040	22391700-040CF26A	Room G6, classroom faucet	0.322
041	22391700-041DW26A	Room G8, drinking fountain	0.378
042	22391700-042CF26A	Room G8, classroom faucet	ND
043	FIXTURE REMOVED	Room G7, prep sinks, clockwise, starting at NW sink closest to door (1)	

Fixture Number	Sample Number	Location / Room No.	Results (ppb)
044	22391700-044KF26A	Room G7, prep sinks, clockwise, starting at NW sink closest to door (2)	ND
045	22391700-045KF26A	Room G7, prep sinks, clockwise, starting at NW sink closest to door (3)	ND
046	22391700-046KF26A	Room G7, prep sinks, clockwise, starting at NW sink closest to door (4)	ND
047	FIXTURE REMOVED	Room G7, prep sinks, clockwise, starting at NW sink closest to door (5)	
048	FIXTURE REMOVED	Room G7, prep sinks, clockwise, starting at NW sink closest to door (6)	
049	22391700-049CF26A	Room R1 – classroom faucet at west wall	0.334
050		Room R1 – drinking fountain in SW corner – OFF BY REQUEST	
051		Room R1 – classroom faucet in SW corner - OFF BY REQUEST	
052	22391700-052CF26A	Room R2 – classroom faucet	0.583
053	22391700-053DW26A	Room R4 – drinking fountain	0.295
054	22391700-054CF26A	Room R4 – classroom faucet	0.279
055	22391700-055DW26A	Room R6 – drinking fountain	0.405
056	22391700-056CF26A	Room R6 – classroom faucet	ND
057	22391700-057CF26A	Room R8 – classroom faucet	ND
058	22391700-058BF26A	North Green Hall girls restroom sinks – left to right (1)	ND
059	22391700-059BF26A	North Green Hall girls restroom sinks – left to right (2)	ND
060	22391700-060BF26A	North Green Hall girls restroom sinks – left to right (3)	ND
061		North Green Hall girls restroom sinks – left to right (4) - NOT WORKING	
062	22391700-062BF26A	North Green Hall girls restroom sinks – left to right (5)	ND
063	22391700-063WB26A	North Green Hall – water bottle filler	ND
064	22391700-064DW26A	North Green Hall drinking fountain - left	ND
065	22391700-065DW26A	North Green Hall drinking fountain - right	ND
066	22391700-066BF26A	North Green Hall boys restroom sinks – left to right (1)	ND
067	22391700-067BF26A	North Green Hall boys restroom sinks – left to right (2)	ND
068	22391700-068BF26A	North Green Hall boys restroom sinks – left to right (3)	ND
069	22391700-069BF26A	North Green Hall boys restroom sinks – left to right (4)	ND
070	22391700-070BF26A	North Green Hall boys restroom sinks – left to right (5)	ND
071	22391700-071DW26A	Room B2 – drinking fountain	1.67
072	22391700-072CF26A	Room B2 – classroom faucet	ND
073	22391700-073DW26A	Room B4 – drinking fountain	ND
074	22391700-074CF26A	Room B4 –classroom faucet	ND
075	22391700-075DW26A	Room B1 – drinking fountain	ND
076		Room B3 – drinking fountain – OFF BY REQUEST	

Fixture Number	Sample Number	Location / Room No.	Results (ppb)
077	22391700-077DW26A	Room Y2 – drinking fountain (north wall)	ND
078	FIXTURE REMOVED	Room Y2 – classroom faucet (west wall)	
079	22391700-079DW26A	Room Y4 – drinking fountain	0.262
080	22391700-080DW26A	Room Y1 – drinking fountain	0.233
081	22391700-081CF26A	Room Y1 – classroom faucet	ND
082	22391700-082DW26A	Room Y3 – drinking fountain	0.275
083	22391700-083CF26A	Room Y3 – classroom faucet	ND
084	22391700-084DW26A	Room Y5 – drinking fountain	0.586
085	22391700-085CF26A	Room Y5 – classroom faucet	ND
086	22391700-086DW26A	Room Y7 – drinking fountain	0.401
087	22391700-087CF26A	Room Y7 – classroom faucet	0.391
088	22391700-088BF26A	Library Hall, girls staff restroom sink	ND
089	22391700-089BF26A	Library Hall, girls restroom sinks – left to right (1)	ND
090	22391700-090BF26A	Library Hall, girls restroom sinks – left to right (2)	0.334
091	22391700-091BF26A	Library Hall, girls restroom sinks – left to right (3)	0.301
092	22391700-092BF26A	Library Hall, girls restroom sinks – left to right (4)	0.276
093	22391700-093BF26A	Library Hall, boys staff restroom sink	0.490
094	22391700-094BF26A	Library Hall, boys restroom sinks – left to right (1)	1.60
095	22391700-095BF26A	Library Hall, boys restroom sinks – left to right (2)	0.610
096	22391700-096BF26A	Library Hall, boys restroom sinks – left to right (3)	1.91
097	22391700-097BF26A	Library Hall, boys restroom sinks – left to right (4)	2.65
098	22391700-098DW26A	Library Hall drinking fountain – left	0.955
099	22391700-099DW26A	Library Hall drinking fountain - right	0.966
100	22391700-100SF26A	New main office workroom sink	ND
101	22391700-101NS26A	New Health Room sink	ND
102	22391700-102BF26A	New Health Room restroom sink	0.257
103	22391700-103BF26A	Old health room restroom sink	0.386
104	22391700-104SF26A	Staff break room sink	ND
105	22391700-105BF26A	Staff restroom near staff break room, - sink faucet	ND
106	22391700-106BF26A	Staff restroom east of main entrance - sink faucet	ND
107	22391700-107SF26A	Conference room - sink faucet	ND

ND = no lead detected

Round 2 – October 3, 2026

Fixture Number	Sample Number	Location / Room No.	Results (ppb)
001	22391700-001DW26A	Main entrance drinking fountain – left	0.455
035	22391700-035CF26A	Room G3, classroom faucet	0.225
061	22391700-061BF26A	North Green Hall girls restroom sinks – left to right (4)	ND

ND = no lead detected

Please refer to the attached fixture location drawings and laboratory analytical report for additional details.

The laboratory analytical results are reported in micrograms per liter ($\mu\text{g/L}$), a unit of measure that is equivalent to ppb.

Sampling methodology and the interpretation of laboratory results were based on the Environmental Protection Agency guidance document titled *3Ts for Reducing Lead in Drinking Water in Schools*. Following this guideline, Apex collected first draw samples from each test location. First draw samples consist of the first 250 milliliters (mL) of water drawn from a fixture after the water has been sitting stagnant for at least 8 hours. The 3Ts' sampling protocol specifying 250-mL samples is designed to maximize the likelihood that the highest concentrations of lead in water used for consumption are identified.

Please feel free to contact me at 503.515.4726 or dale.voeller@apexcos.com with any questions or comments.

Sincerely,





Dale Voeller, CSP
Senior Project Manager



Attachment: Fixture Location Drawings
Laboratory Analytical Reports



RA Brown Middle School
Drinking Water Sampling Locations
October 14, 2026
Page 1 of 7

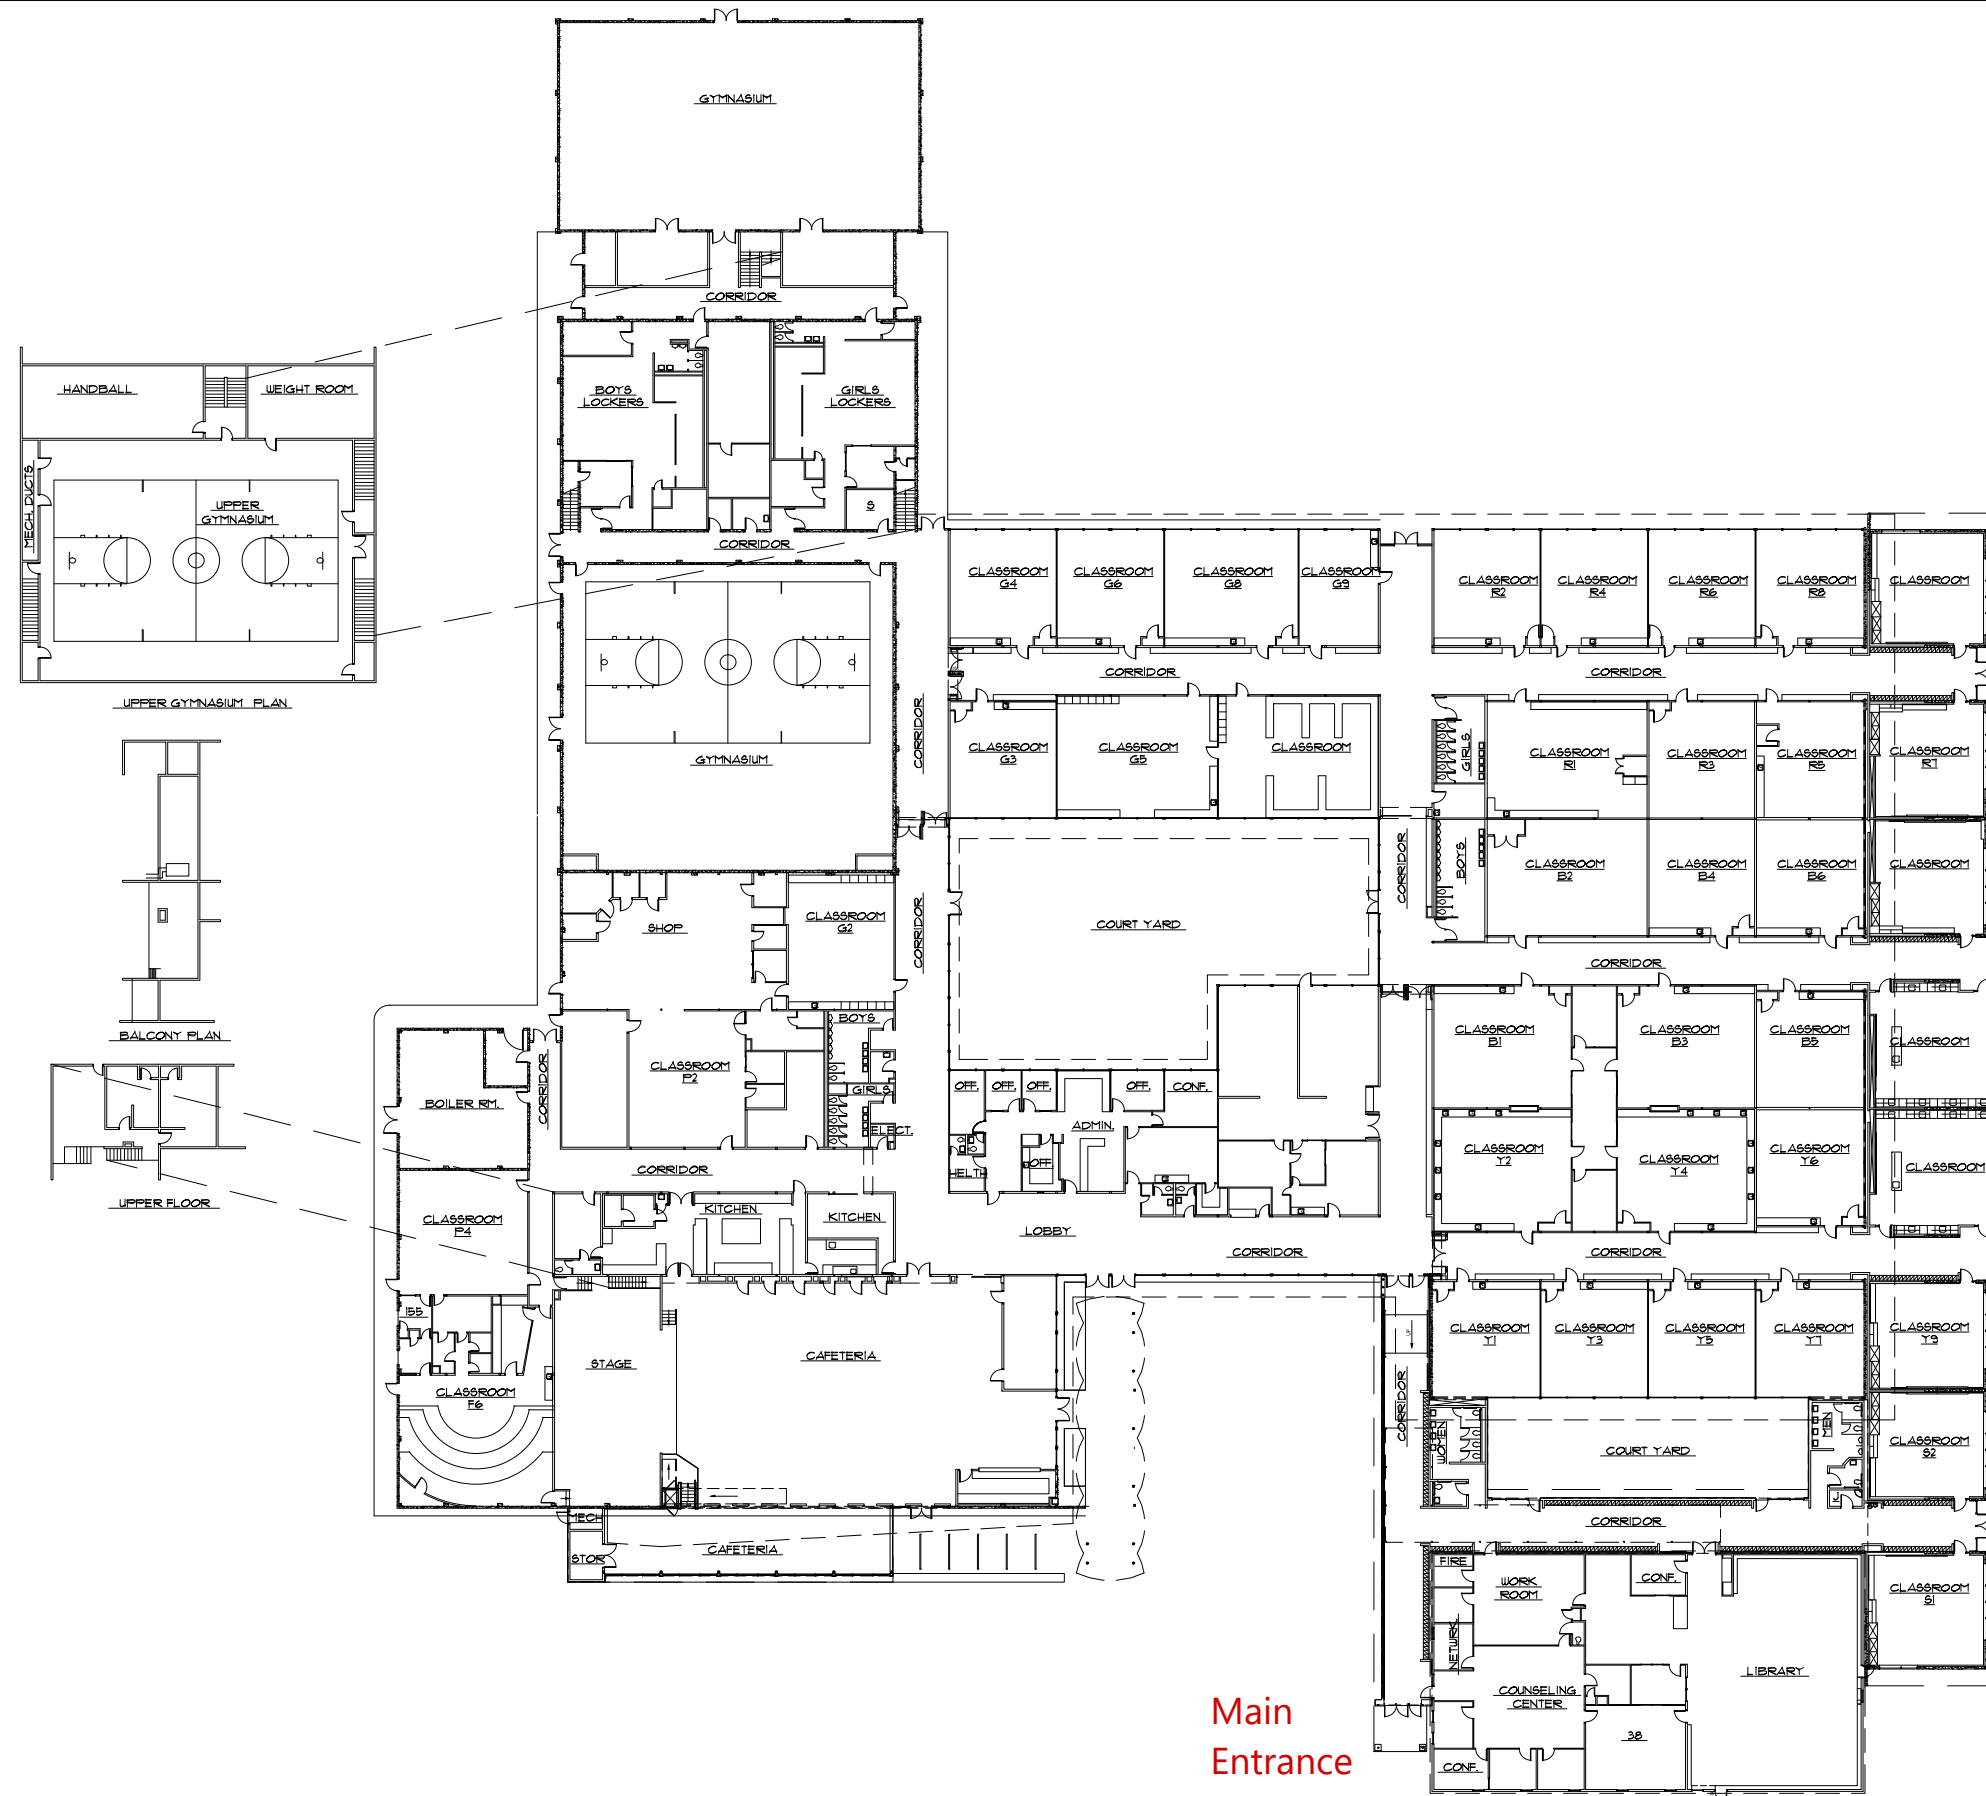

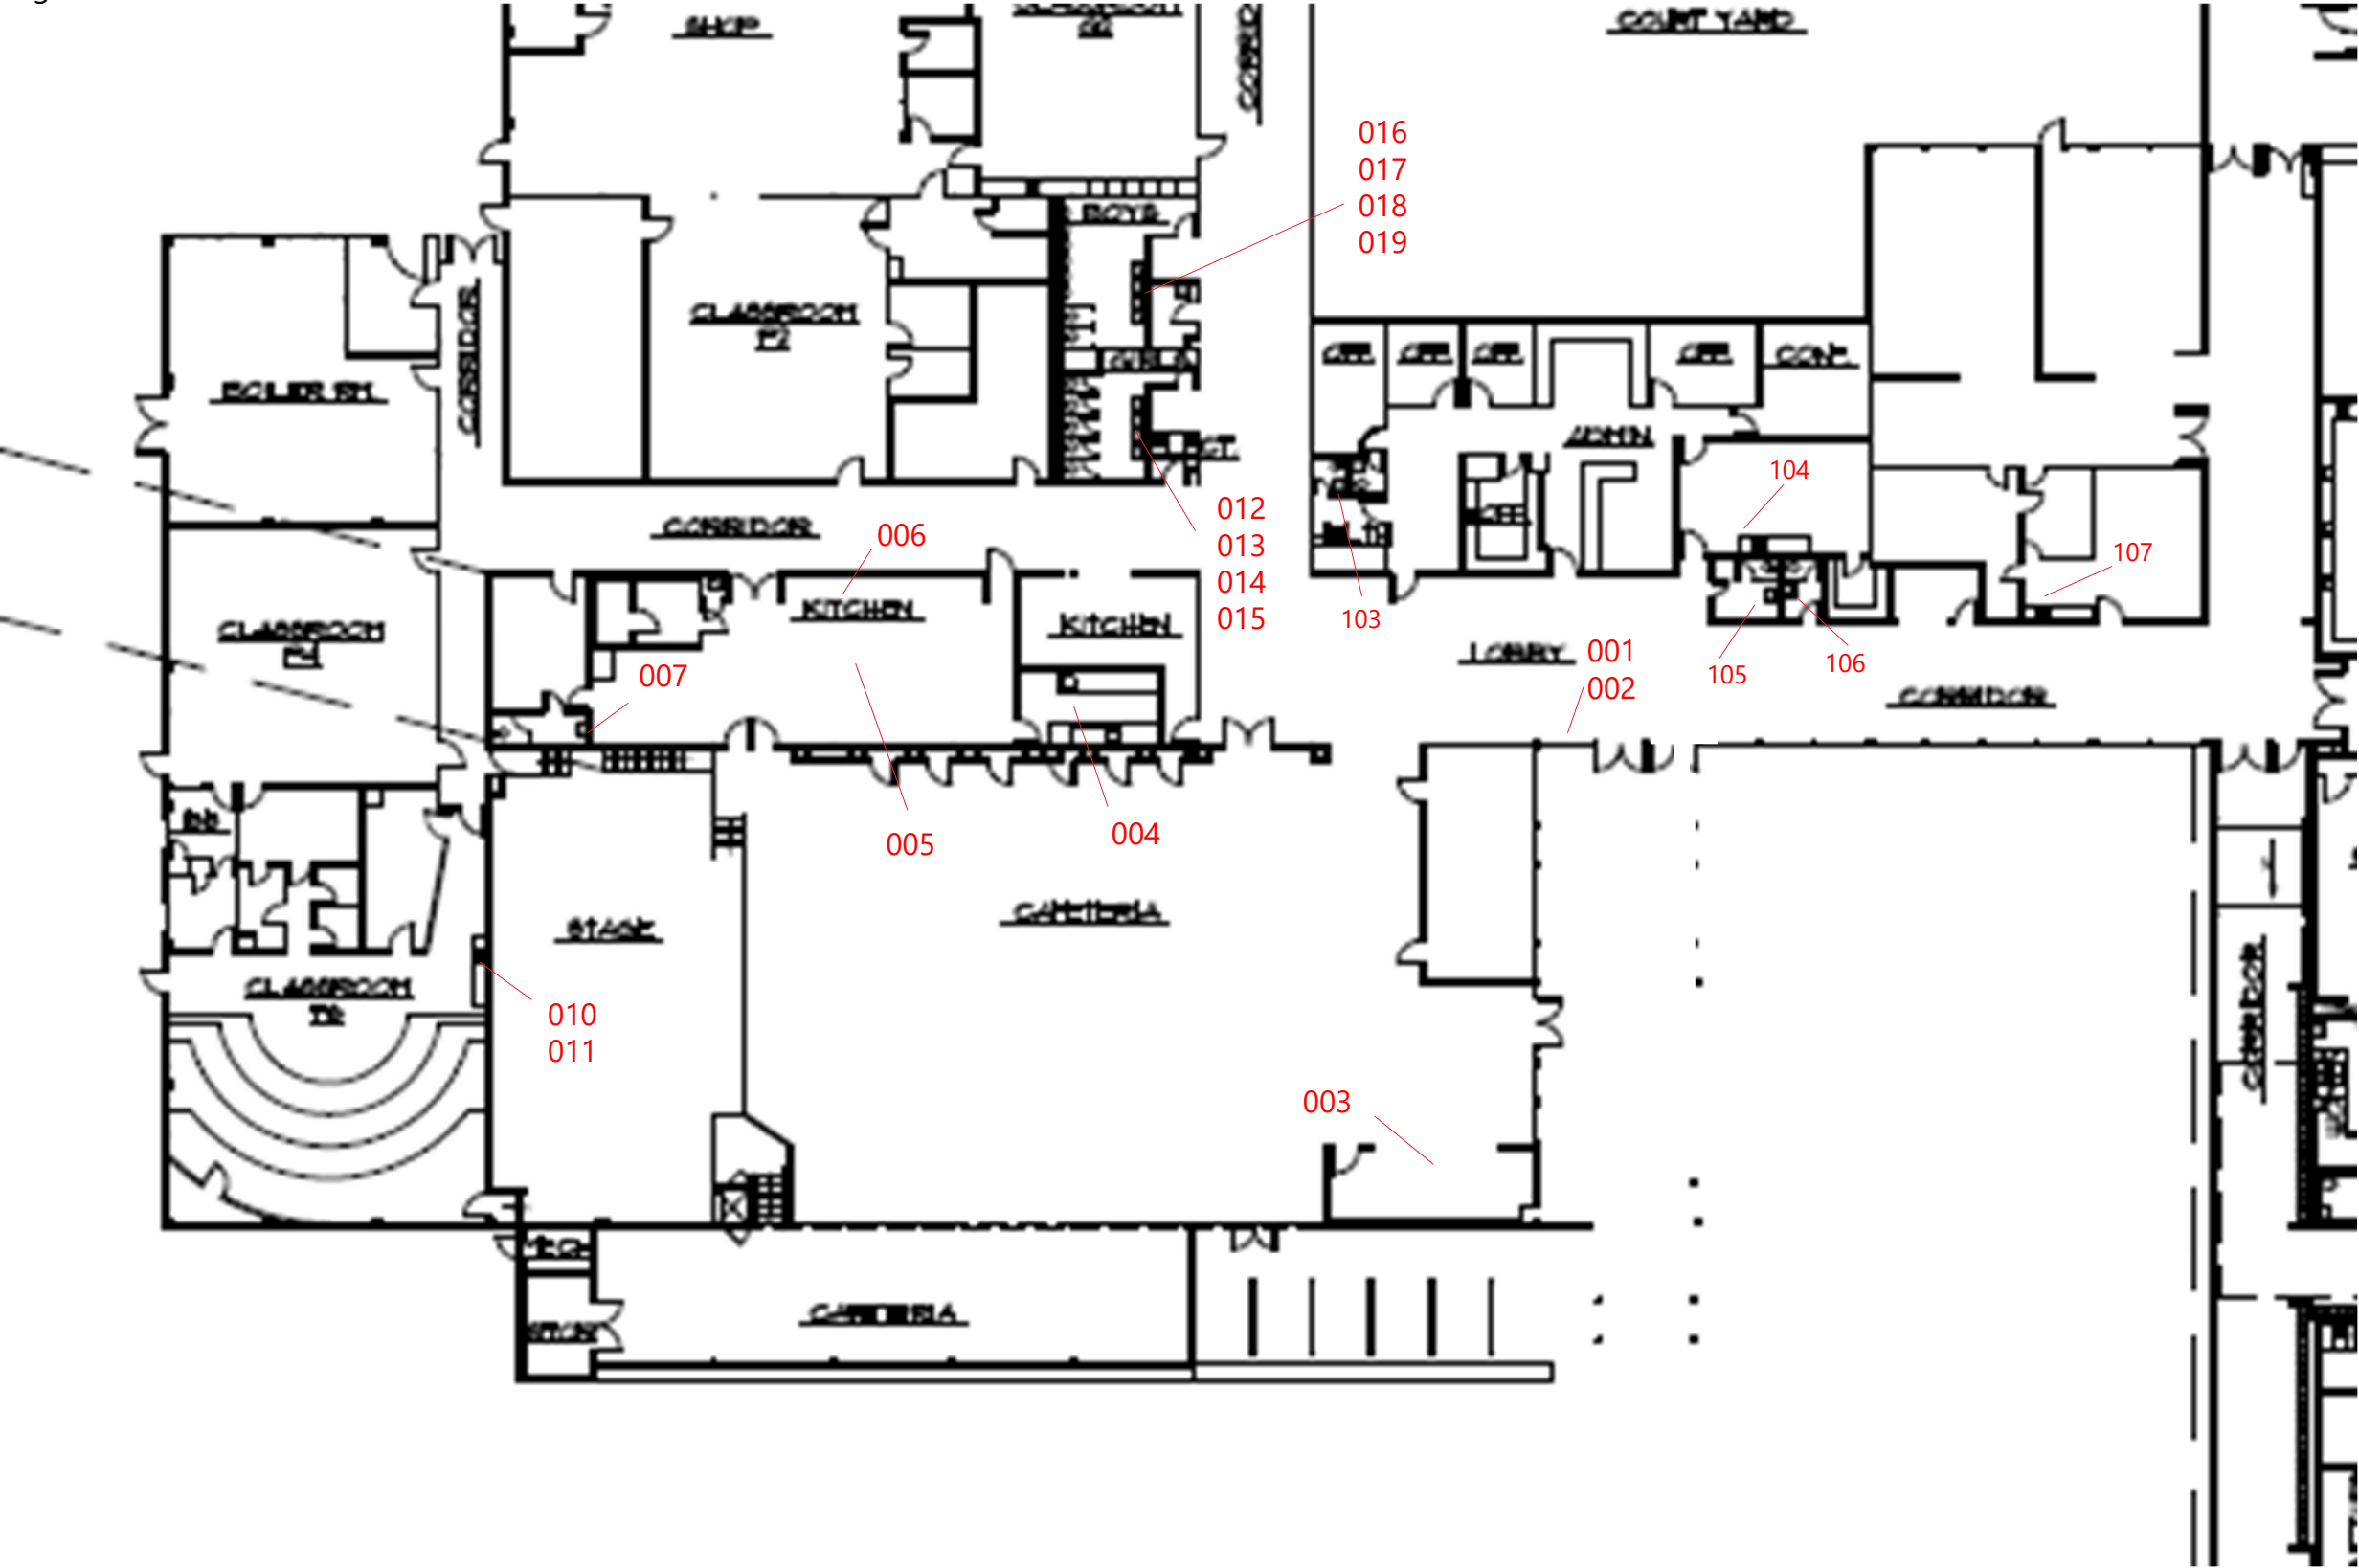


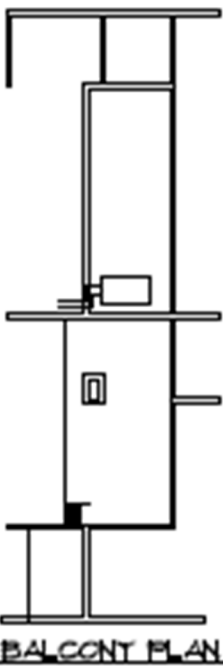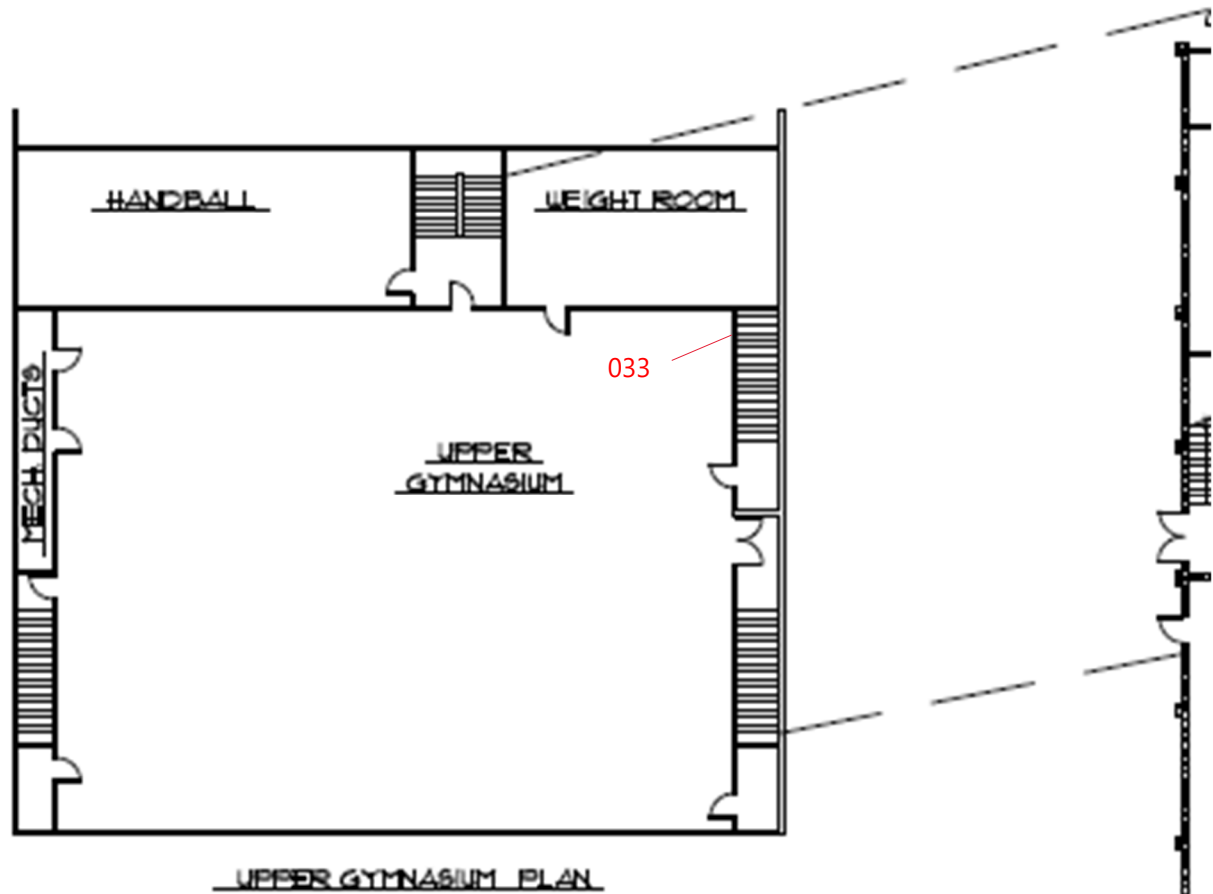



008 009


Boys Dressing Room


Girls Dressing Room

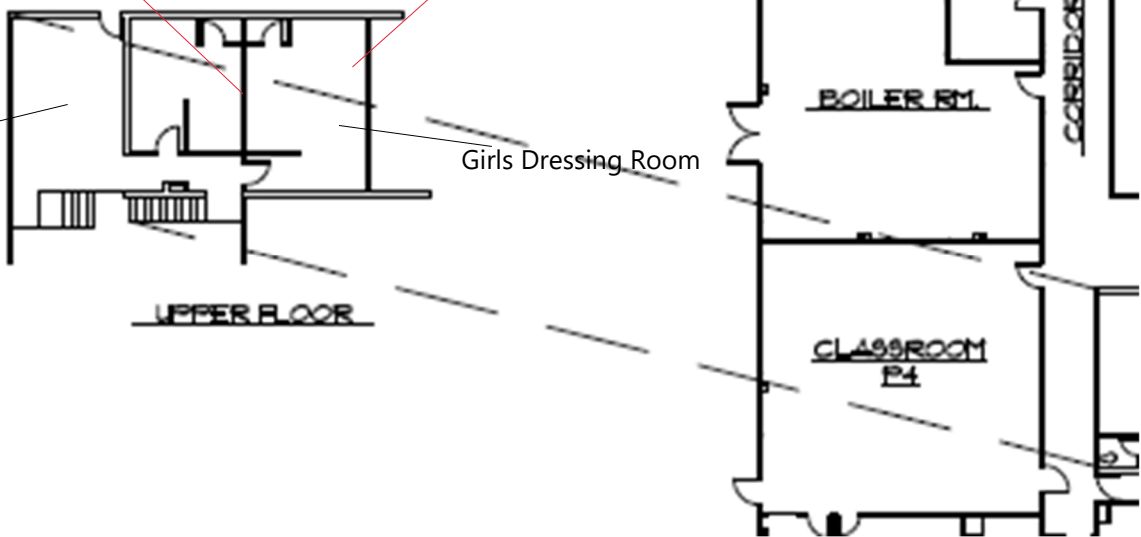

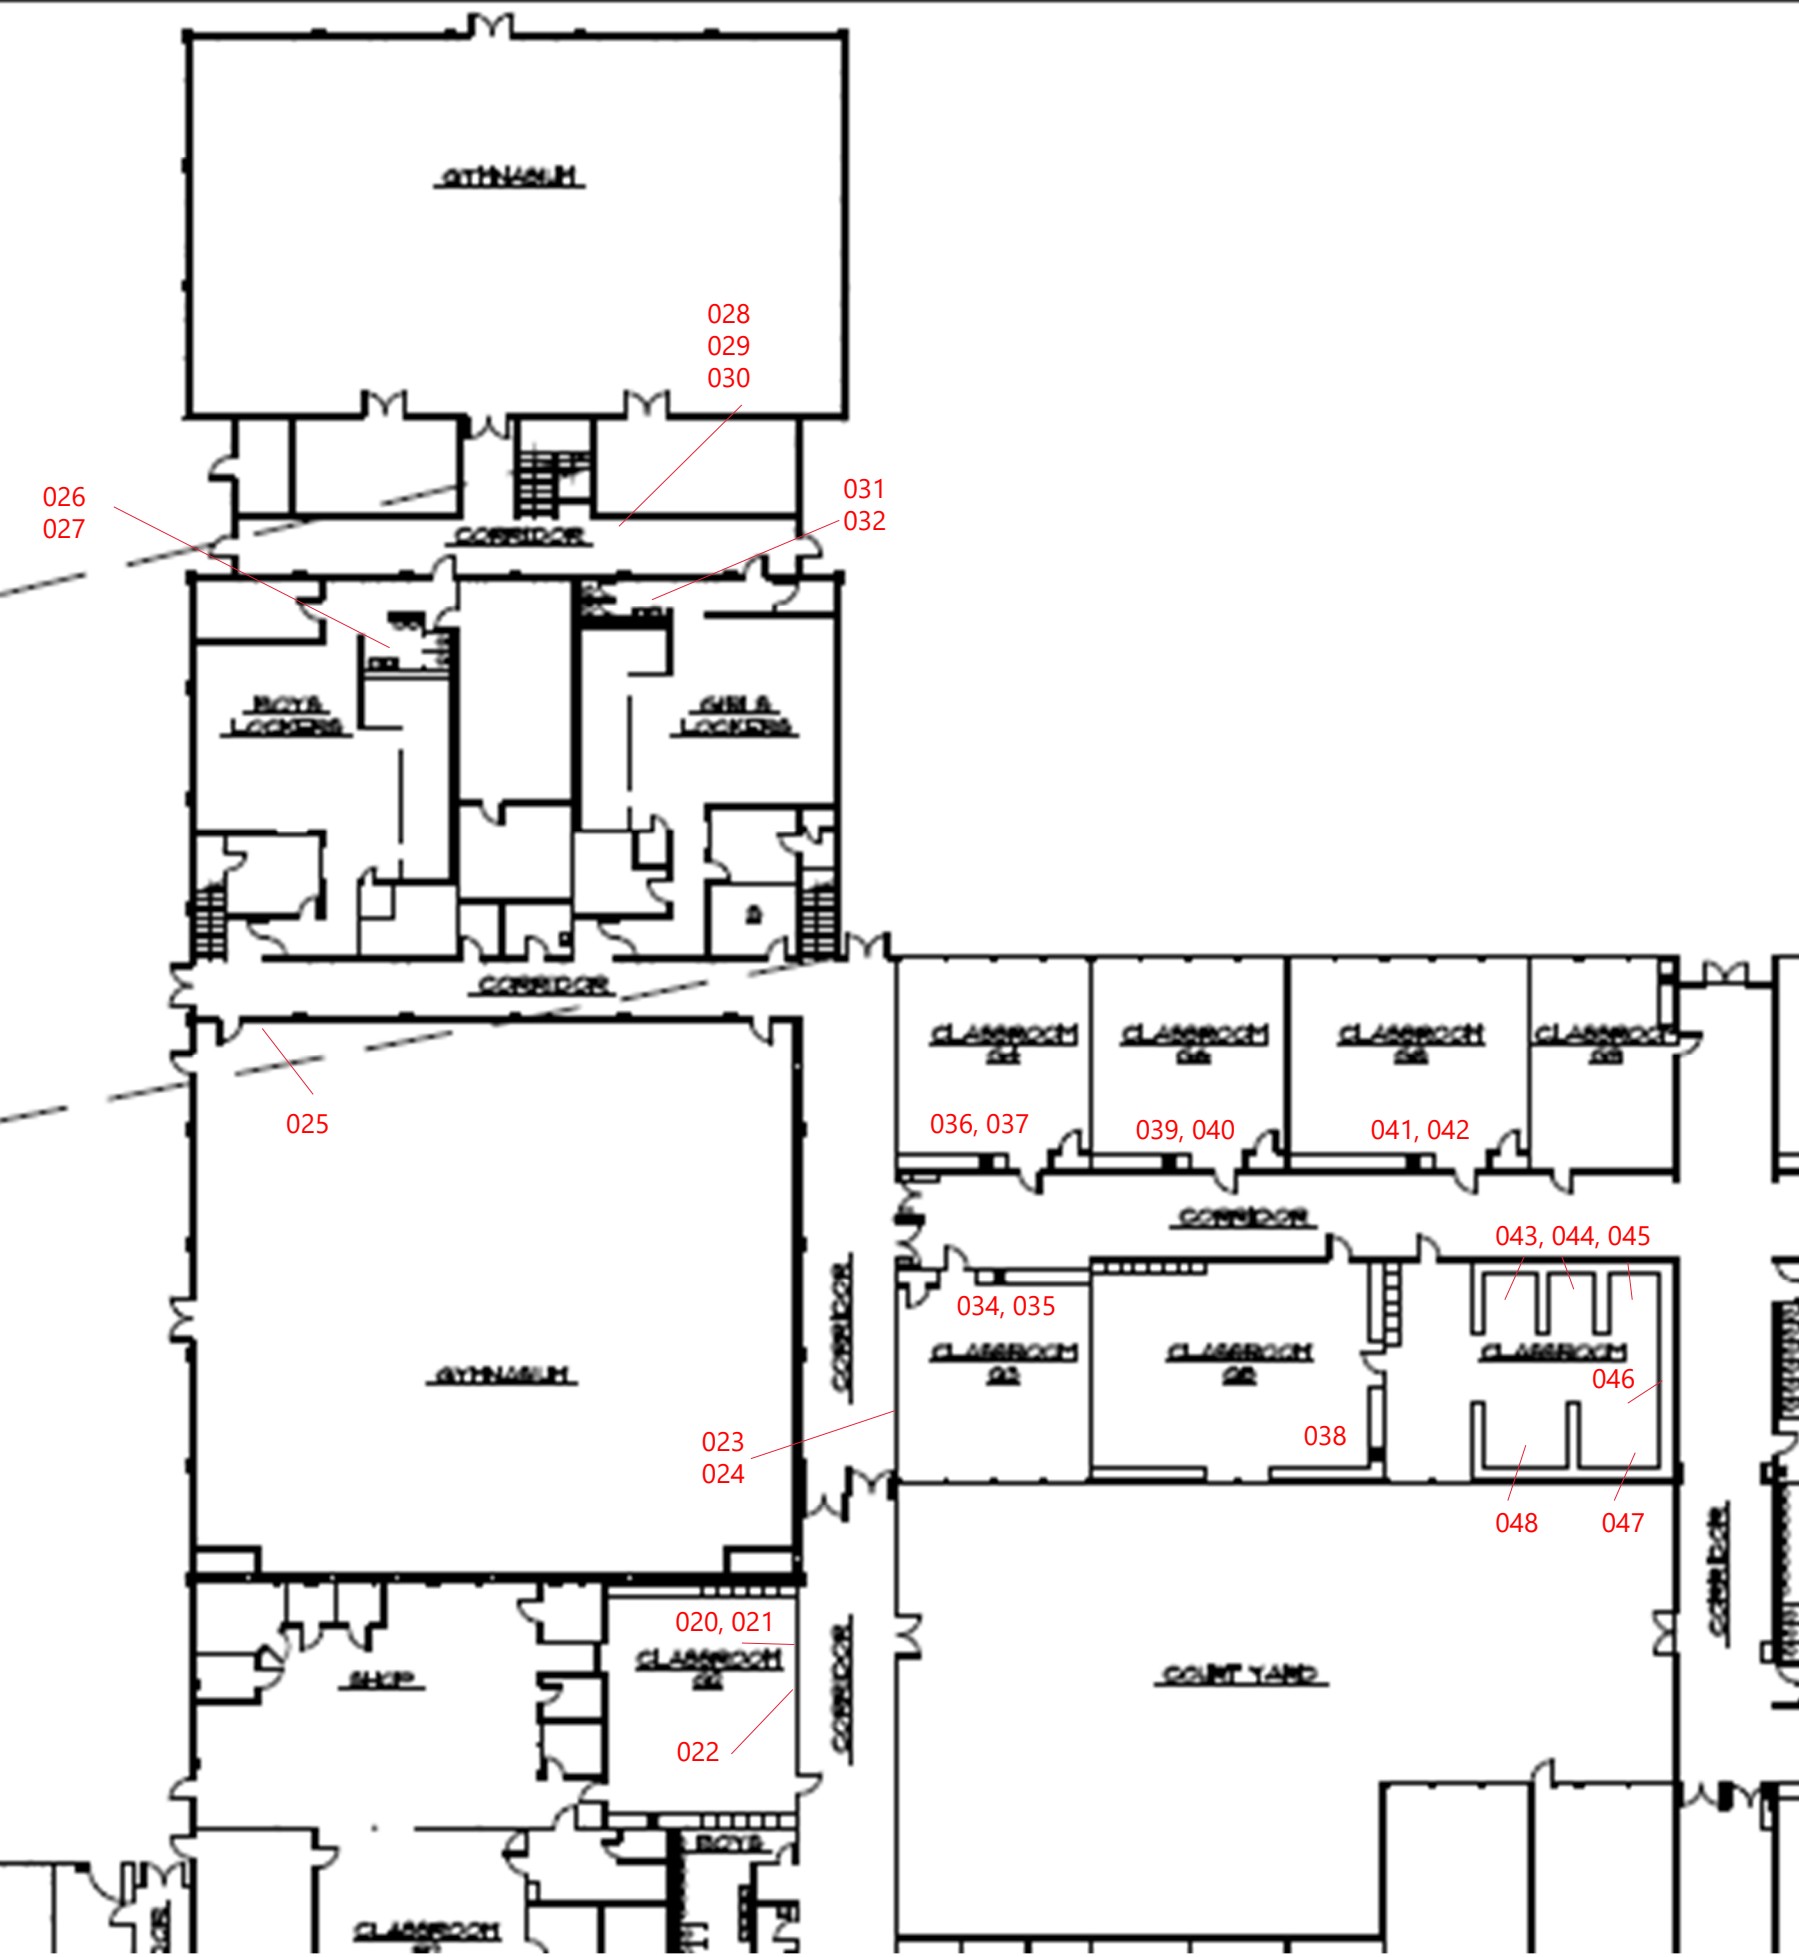

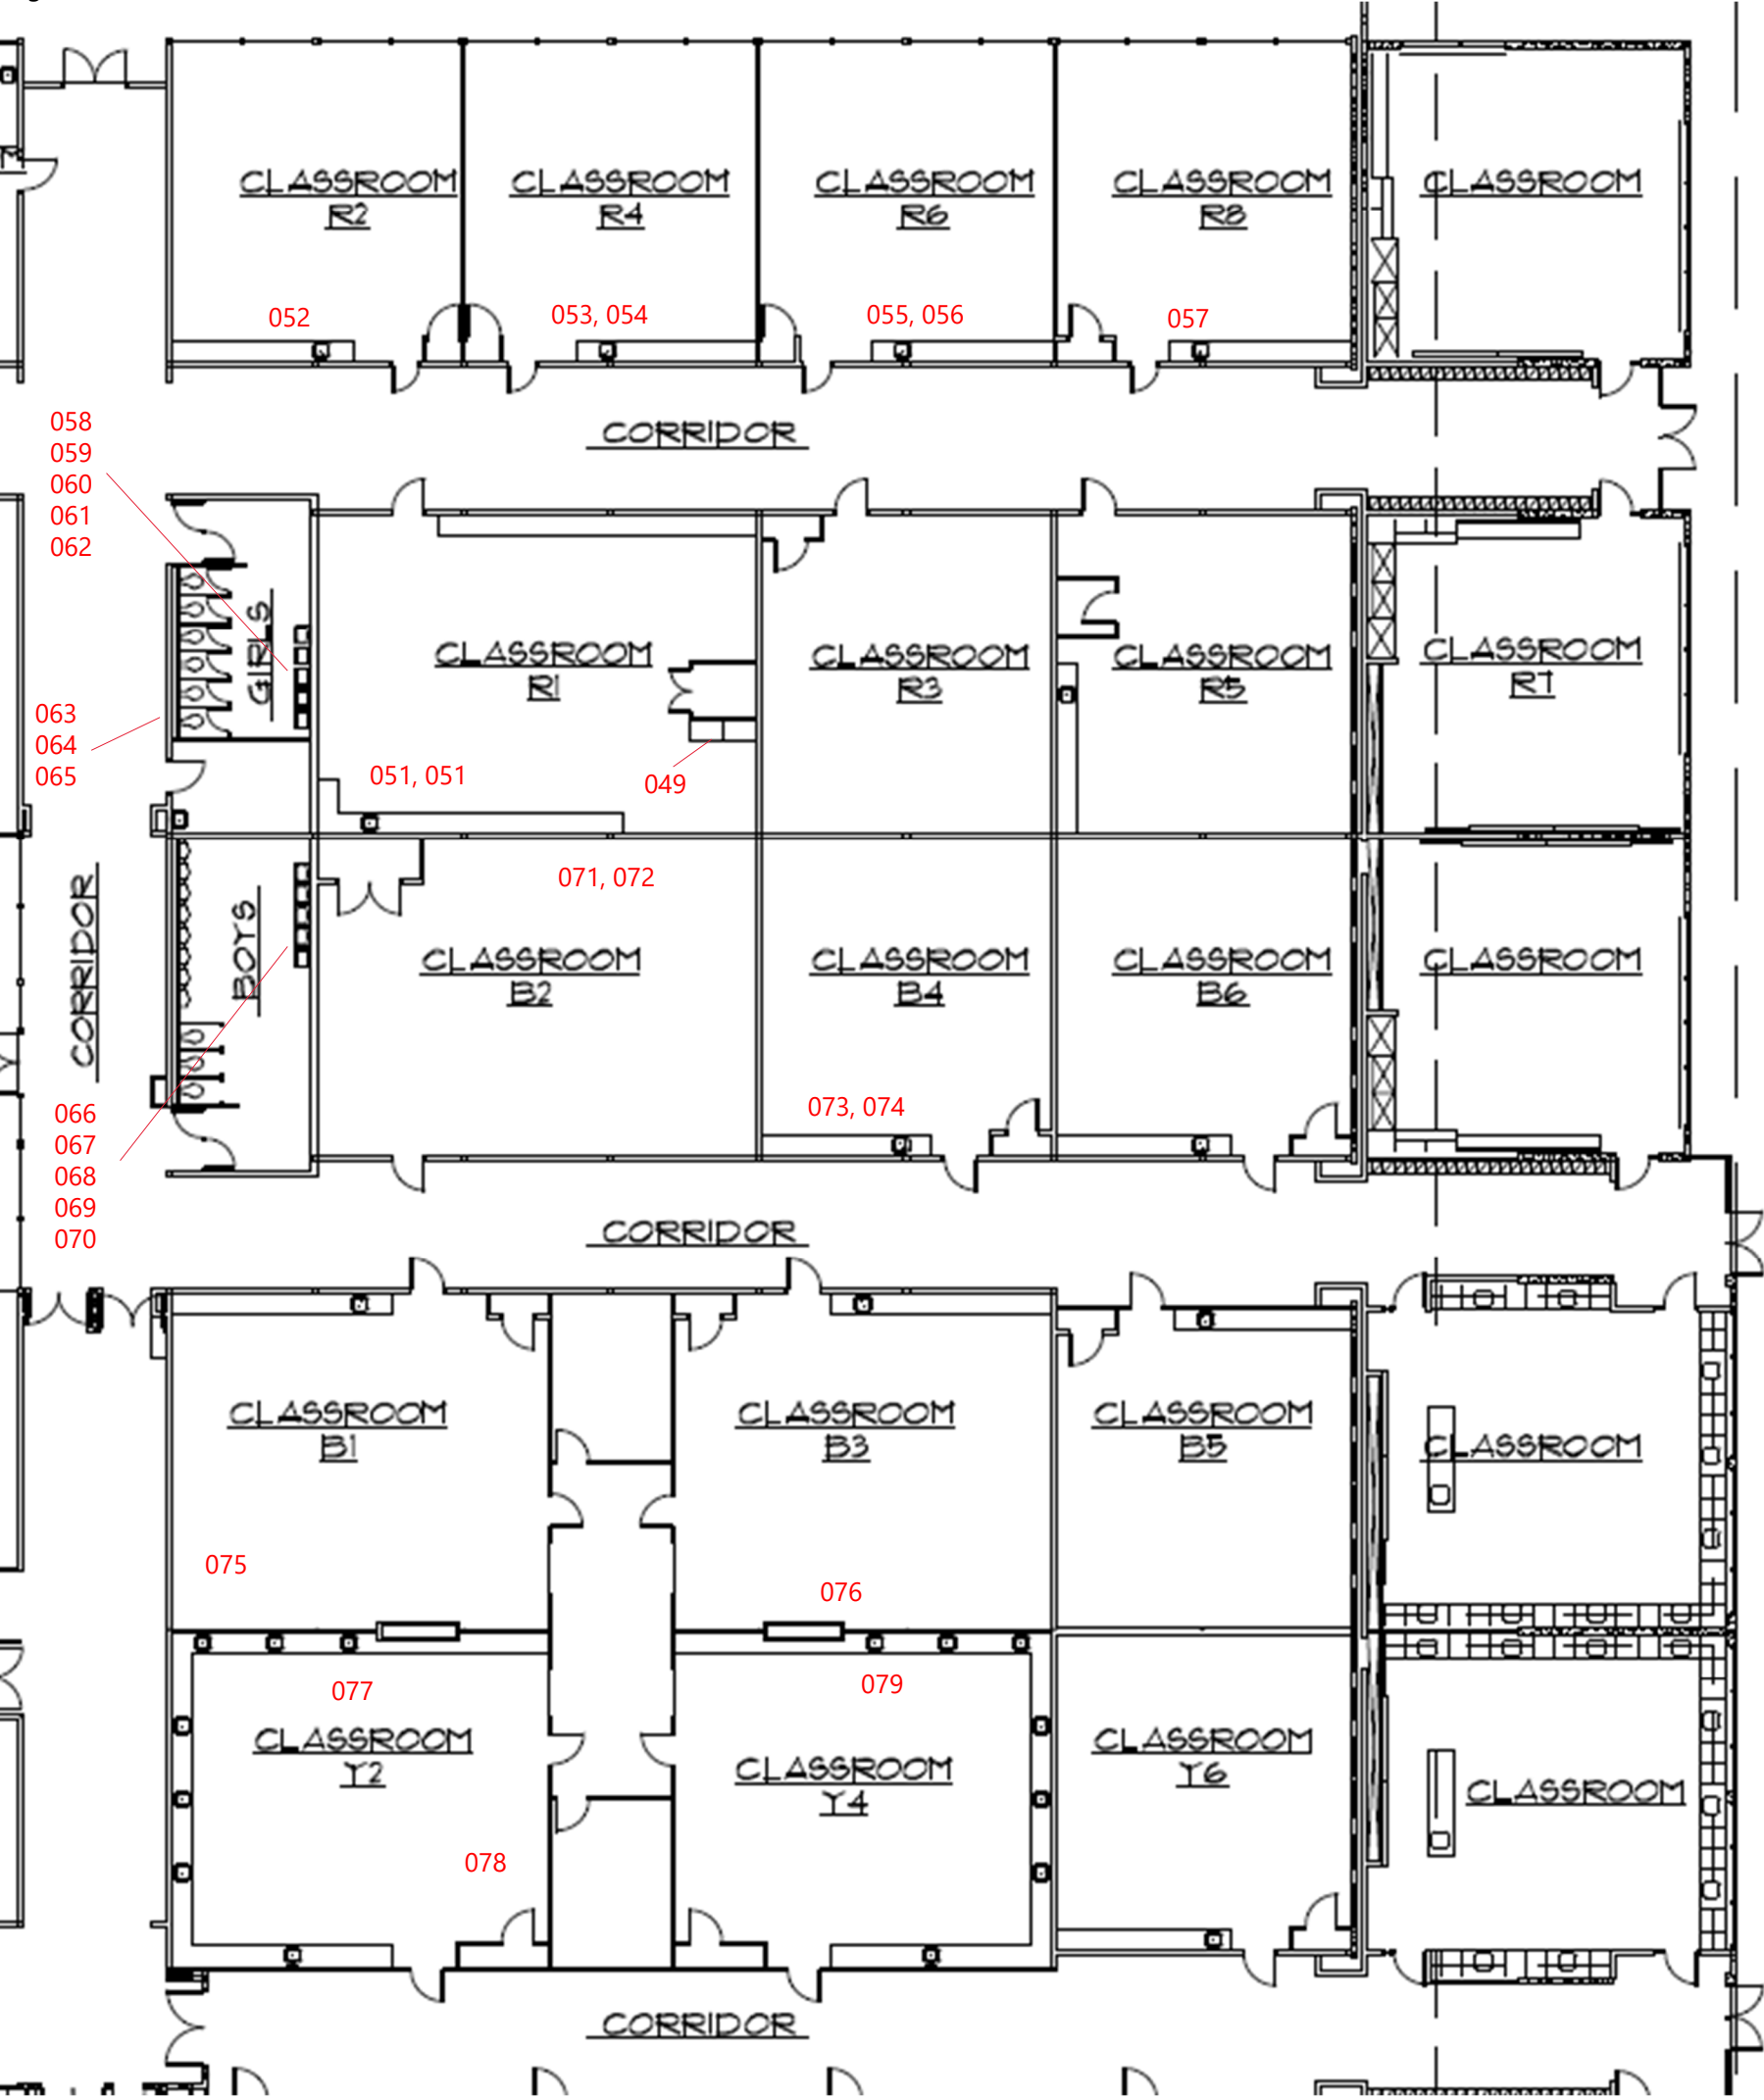

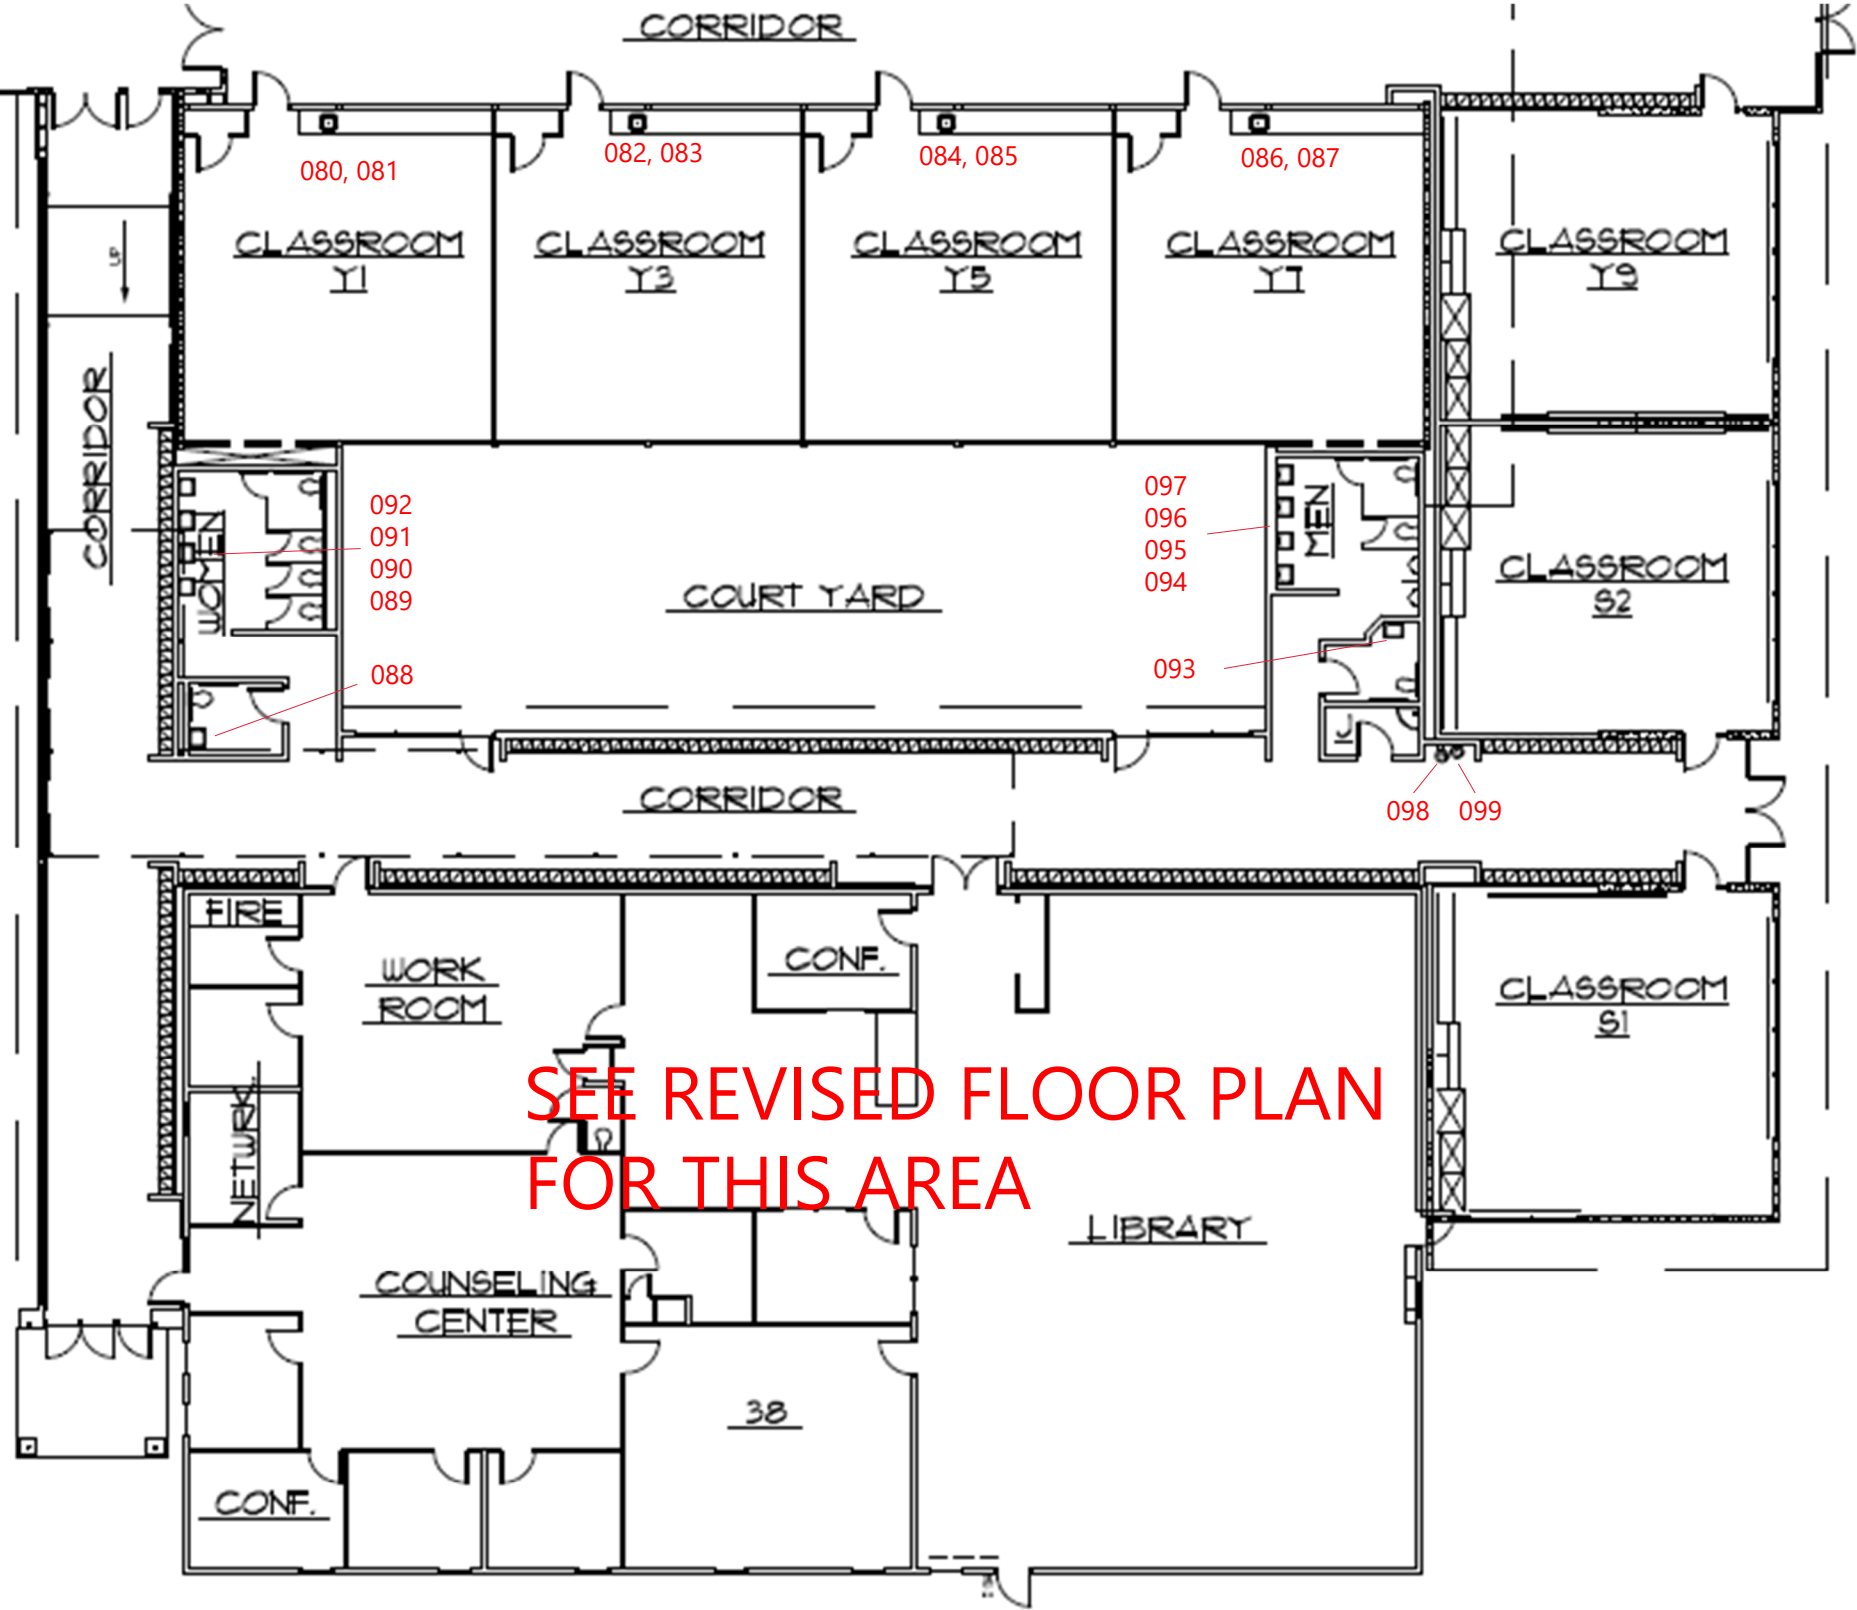

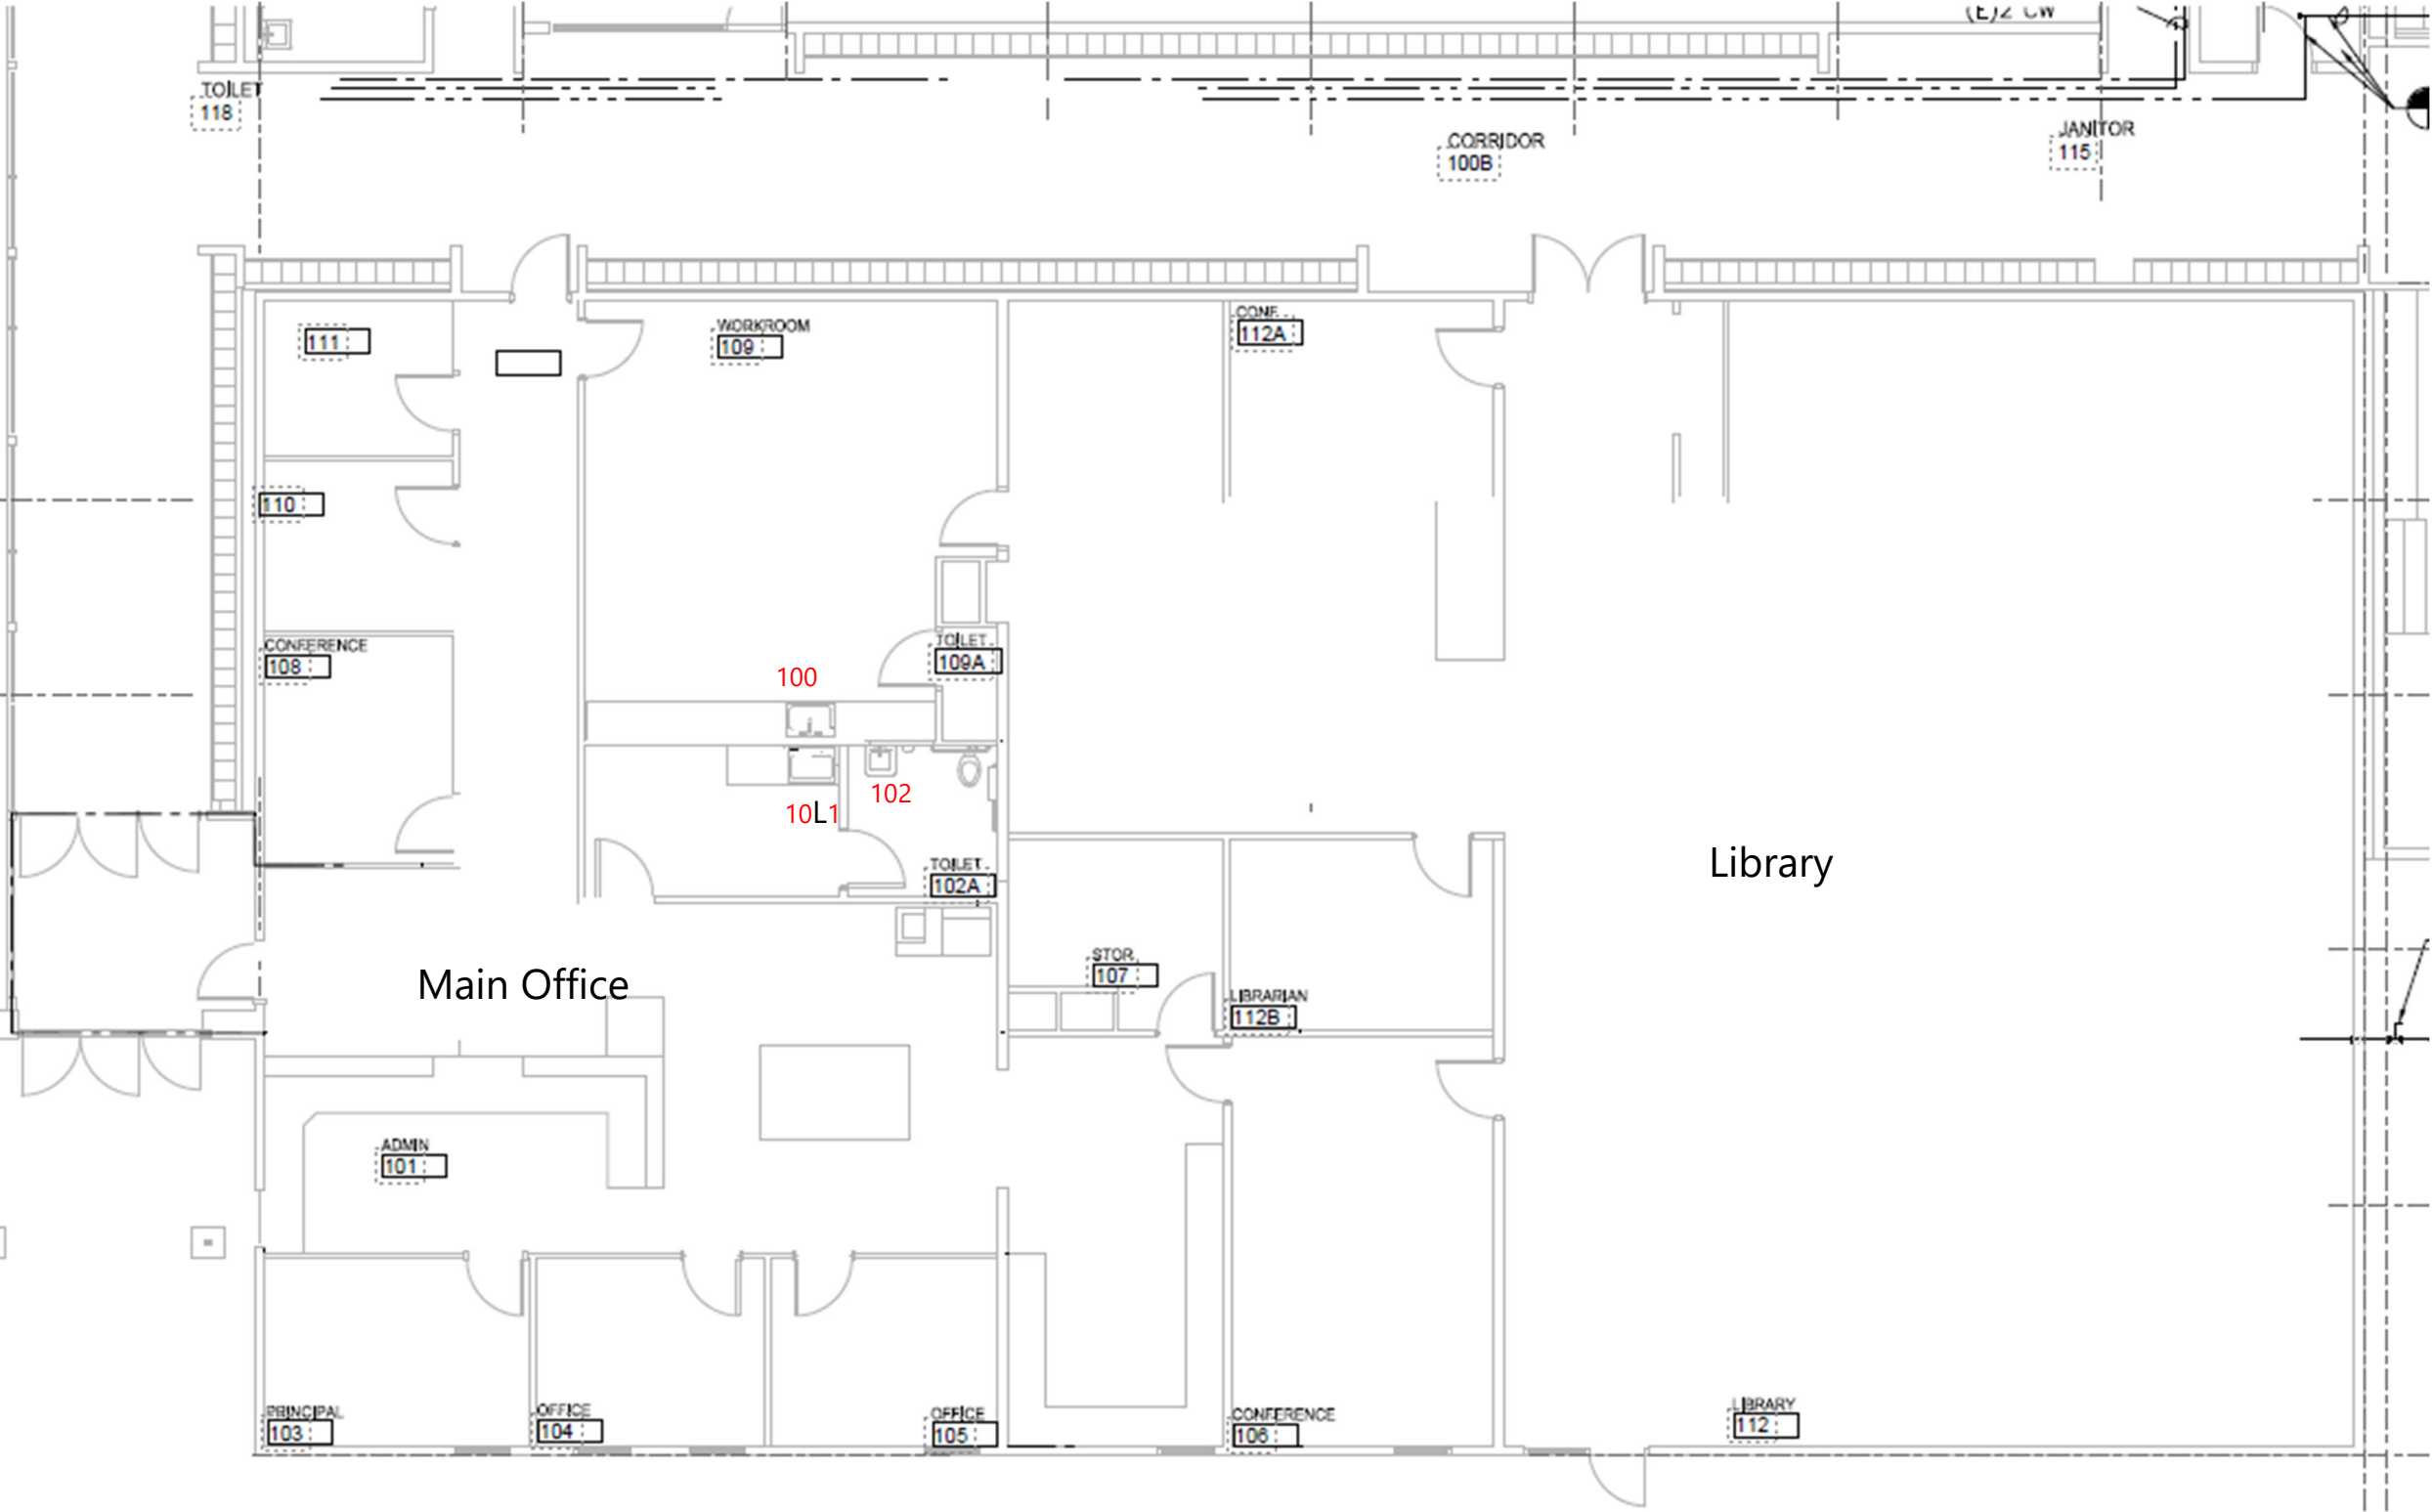



ANALYTICAL REPORT

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

Tuesday, September 22, 2026

Dale Voeller

Apex Companies, LLC - Portland

4412 S Corbett Ave

Portland, OR 97239

RE: A6I1374 - Hillsboro School District - RA Brown MS/26010605

Thank you for using Apex Laboratories. We greatly appreciate your business and strive to provide the highest quality services to the environmental industry.

Enclosed are the results of analyses for work order A6I1374, which was received by the laboratory on 9/14/2026 at 11:45:00AM.

If you have any questions concerning this report or the services we offer, please feel free to contact me by email at: jwoodcock@apex-labs.com, or by phone at 503-718-2323.

Please note: All samples will be disposed of within 30 days of sample receipt, unless prior arrangements have been made.

Cooler Receipt Information			
<u>Acceptable Receipt Temperature is less than, or equal to, 6 degC (not frozen), or received on ice the same day as sampling.</u>			
(See Cooler Receipt Form for details)			
Default Cooler	21.1	degC	

This Final Report is the official version of the data results for this sample submission, unless superseded by a subsequent, labeled amended report.

All other deliverables derived from this data, including Electronic Data Deliverables (EDDs), CLP-like forms, client requested summary sheets, and all other products are considered secondary to this report.



Apex Laboratories

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Jason Woodcock, Project Manager

**ANALYTICAL REPORT****Apex Laboratories, LLC**6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062**Apex Companies, LLC - Portland**4412 S Corbett Ave
Portland, OR 97239Project: **Hillsboro School District**

Project Number: RA Brown MS/26010605

Project Manager: Dale Voeller

Report ID:

A6I1374 - 09 22 26 1218

ANALYTICAL REPORT FOR SAMPLES**SAMPLE INFORMATION**

Client Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
22391700-002DW26A	A6I1374-01	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-003KF26A	A6I1374-02	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-004KF26A	A6I1374-03	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-005KF26A	A6I1374-04	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-006KF26A	A6I1374-05	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-007BF26A	A6I1374-06	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-008CF26A	A6I1374-07	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-009CF26A	A6I1374-08	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-010DW26A	A6I1374-09	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-011CF26A	A6I1374-10	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-012BF26A	A6I1374-11	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-013BF26A	A6I1374-12	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-014BF26A	A6I1374-13	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-015BF26A	A6I1374-14	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-016BF26A	A6I1374-15	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-017BF26A	A6I1374-16	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-018BF26A	A6I1374-17	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-019BF26A	A6I1374-18	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-020DW26A	A6I1374-19	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-021CF26A	A6I1374-20	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-022CF26A	A6I1374-21	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-023WB26A	A6I1374-22	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-024DW26A	A6I1374-23	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-026BF26A	A6I1374-24	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-027BF26A	A6I1374-25	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-028WB26A	A6I1374-26	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-029DW26A	A6I1374-27	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-030DW26A	A6I1374-28	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-031BF26A	A6I1374-29	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-032BF26A	A6I1374-30	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-033DW26A	A6I1374-31	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-034DW26A	A6I1374-32	Drinking Water	09/12/26 00:00	09/14/26 11:45

Apex Laboratories

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Jason Woodcock, Project Manager

**ANALYTICAL REPORT****Apex Laboratories, LLC**6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062**Apex Companies, LLC - Portland**4412 S Corbett Ave
Portland, OR 97239Project: **Hillsboro School District**

Project Number: RA Brown MS/26010605

Project Manager: Dale Voeller

Report ID:

A6I1374 - 09 22 26 1218

ANALYTICAL REPORT FOR SAMPLES**SAMPLE INFORMATION**

Client Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
22391700-036DW26A	A6I1374-33	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-037CF26A	A6I1374-34	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-038CF26A	A6I1374-35	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-039DW26A	A6I1374-36	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-040CF26A	A6I1374-37	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-041DW26A	A6I1374-38	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-042CF26A	A6I1374-39	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-044KF26A	A6I1374-40	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-045KF26A	A6I1374-41	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-046KF26A	A6I1374-42	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-049CF26A	A6I1374-43	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-052CF26A	A6I1374-44	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-053DW26A	A6I1374-45	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-054CF26A	A6I1374-46	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-055DW26A	A6I1374-47	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-056CF26A	A6I1374-48	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-057CF26A	A6I1374-49	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-058BF26A	A6I1374-50	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-059BF26A	A6I1374-51	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-060BF26A	A6I1374-52	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-062BF26A	A6I1374-53	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-063WB26A	A6I1374-54	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-064DW26A	A6I1374-55	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-065DW26A	A6I1374-56	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-066BF26A	A6I1374-57	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-067BF26A	A6I1374-58	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-068BF26A	A6I1374-59	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-069BF26A	A6I1374-60	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-070BF26A	A6I1374-61	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-071DW26A	A6I1374-62	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-072CF26A	A6I1374-63	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-073DW26A	A6I1374-64	Drinking Water	09/12/26 00:00	09/14/26 11:45

Apex Laboratories

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Jason Woodcock, Project Manager

**ANALYTICAL REPORT****Apex Laboratories, LLC**6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062**Apex Companies, LLC - Portland**4412 S Corbett Ave
Portland, OR 97239Project: **Hillsboro School District**

Project Number: RA Brown MS/26010605

Project Manager: Dale Voeller

Report ID:

A6I1374 - 09 22 26 1218

ANALYTICAL REPORT FOR SAMPLES**SAMPLE INFORMATION**

Client Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
22391700-074CF26A	A6I1374-65	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-075DW26A	A6I1374-66	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-077DW26A	A6I1374-67	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-079DW26A	A6I1374-68	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-080DW26A	A6I1374-69	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-081CF26A	A6I1374-70	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-082DW26A	A6I1374-71	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-083CF26A	A6I1374-72	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-084DW26A	A6I1374-73	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-085CF26A	A6I1374-74	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-086DW26A	A6I1374-75	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-087CF26A	A6I1374-76	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-088BF26A	A6I1374-77	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-089BF26A	A6I1374-78	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-090BF26A	A6I1374-79	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-091BF26A	A6I1374-80	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-092BF26A	A6I1374-81	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-093BF26A	A6I1374-82	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-094BF26A	A6I1374-83	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-095BF26A	A6I1374-84	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-096BF26A	A6I1374-85	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-097BF26A	A6I1374-86	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-098DW26A	A6I1374-87	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-099DW26A	A6I1374-88	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-100SF26A	A6I1374-89	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-101NS26A	A6I1374-90	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-102BF26A	A6I1374-91	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-103BF26A	A6I1374-92	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-104SF26A	A6I1374-93	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-105BF26A	A6I1374-94	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-106BF26A	A6I1374-95	Drinking Water	09/12/26 00:00	09/14/26 11:45
22391700-107SF26A	A6I1374-96	Drinking Water	09/12/26 00:00	09/14/26 11:45

Apex Laboratories

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Jason Woodcock, Project Manager



ANALYTICAL REPORT

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

Apex Companies, LLC - Portland

4412 S Corbett Ave
Portland, OR 97239

Project: Hillsboro School District

Project Number: RA Brown MS/26010605

Project Manager: Dale Voeller

Report ID:

A6I1374 - 09 22 26 1218

ANALYTICAL REPORT FOR SAMPLES

SAMPLE INFORMATION

Client Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
------------------	---------------	--------	--------------	---------------

ANALYTICAL SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Sample Result	Detection Limit	Reporting Limit	Units	Dilution	Date Analyzed	Method Ref.	Notes
22391700-002DW26A (A6I1374-01)				Matrix: Drinking Water				
Batch: 26I0421								
Lead	ND	---	0.200	ug/L	1	09/16/26 18:58	EPA 200.8	
22391700-003KF26A (A6I1374-02)				Matrix: Drinking Water				
Batch: 26I0421								
Lead	6.04	---	0.200	ug/L	1	09/16/26 19:00	EPA 200.8	
22391700-004KF26A (A6I1374-03)				Matrix: Drinking Water				
Batch: 26I0421								
Lead	3.71	---	0.200	ug/L	1	09/16/26 19:02	EPA 200.8	
22391700-005KF26A (A6I1374-04)				Matrix: Drinking Water				
Batch: 26I0421								
Lead	0.594	---	0.200	ug/L	1	09/16/26 19:04	EPA 200.8	
22391700-006KF26A (A6I1374-05)				Matrix: Drinking Water				
Batch: 26I0421								
Lead	ND	---	0.200	ug/L	1	09/16/26 19:06	EPA 200.8	
22391700-007BF26A (A6I1374-06)				Matrix: Drinking Water				
Batch: 26I0421								
Lead	0.475	---	0.200	ug/L	1	09/16/26 19:08	EPA 200.8	
22391700-008CF26A (A6I1374-07)				Matrix: Drinking Water				
Batch: 26I0421								
Lead	0.964	---	0.200	ug/L	1	09/16/26 19:10	EPA 200.8	
22391700-009CF26A (A6I1374-08)				Matrix: Drinking Water				
Batch: 26I0421								
Lead	0.730	---	0.200	ug/L	1	09/16/26 19:12	EPA 200.8	

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.



ANALYTICAL REPORT

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

Apex Companies, LLC - Portland

4412 S Corbett Ave
Portland, OR 97239

Project: Hillsboro School District

Project Number: RA Brown MS/26010605

Project Manager: Dale Voeller

Report ID:

A6I1374 - 09 22 26 1218

ANALYTICAL SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Sample Result	Detection Limit	Reporting Limit	Units	Dilution	Date Analyzed	Method Ref.	Notes
22391700-010DW26A (A6I1374-09) Matrix: Drinking Water								
Batch: 26I0421								
Lead	0.499	---	0.200	ug/L	1	09/16/26 19:14	EPA 200.8	
22391700-011CF26A (A6I1374-10) Matrix: Drinking Water								
Batch: 26I0421								
Lead	0.236	---	0.200	ug/L	1	09/16/26 19:16	EPA 200.8	
22391700-012BF26A (A6I1374-11) Matrix: Drinking Water								
Batch: 26I0421								
Lead	ND	---	0.200	ug/L	1	09/16/26 19:22	EPA 200.8	
22391700-013BF26A (A6I1374-12) Matrix: Drinking Water								
Batch: 26I0421								
Lead	ND	---	0.200	ug/L	1	09/16/26 19:24	EPA 200.8	
22391700-014BF26A (A6I1374-13) Matrix: Drinking Water								
Batch: 26I0421								
Lead	ND	---	0.200	ug/L	1	09/16/26 19:26	EPA 200.8	
22391700-015BF26A (A6I1374-14) Matrix: Drinking Water								
Batch: 26I0421								
Lead	ND	---	0.200	ug/L	1	09/16/26 19:28	EPA 200.8	
22391700-016BF26A (A6I1374-15) Matrix: Drinking Water								
Batch: 26I0421								
Lead	ND	---	0.200	ug/L	1	09/16/26 19:30	EPA 200.8	
22391700-017BF26A (A6I1374-16) Matrix: Drinking Water								
Batch: 26I0421								
Lead	ND	---	0.200	ug/L	1	09/16/26 19:32	EPA 200.8	
22391700-018BF26A (A6I1374-17) Matrix: Drinking Water								
Batch: 26I0421								
Lead	0.228	---	0.200	ug/L	1	09/16/26 19:34	EPA 200.8	

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.



ANALYTICAL REPORT

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

Apex Companies, LLC - Portland

4412 S Corbett Ave
Portland, OR 97239

Project: Hillsboro School District

Project Number: RA Brown MS/26010605

Project Manager: Dale Voeller

Report ID:

A6I1374 - 09 22 26 1218

ANALYTICAL SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Sample Result	Detection Limit	Reporting Limit	Units	Dilution	Date Analyzed	Method Ref.	Notes
22391700-019BF26A (A6I1374-18)				Matrix: Drinking Water				
Batch: 26I0421								
Lead	0.225	---	0.200	ug/L	1	09/16/26 19:36	EPA 200.8	
22391700-020DW26A (A6I1374-19)				Matrix: Drinking Water				
Batch: 26I0421								
Lead	ND	---	0.200	ug/L	1	09/16/26 19:38	EPA 200.8	
22391700-021CF26A (A6I1374-20)				Matrix: Drinking Water				
Batch: 26I0435								
Lead	ND	---	0.200	ug/L	1	09/16/26 13:13	EPA 200.8	
22391700-022CF26A (A6I1374-21)				Matrix: Drinking Water				
Batch: 26I0435								
Lead	ND	---	0.200	ug/L	1	09/16/26 13:15	EPA 200.8	
22391700-023WB26A (A6I1374-22)				Matrix: Drinking Water				
Batch: 26I0435								
Lead	ND	---	0.200	ug/L	1	09/16/26 13:17	EPA 200.8	
22391700-024DW26A (A6I1374-23)				Matrix: Drinking Water				
Batch: 26I0435								
Lead	ND	---	0.200	ug/L	1	09/16/26 13:19	EPA 200.8	
22391700-026BF26A (A6I1374-24)				Matrix: Drinking Water				
Batch: 26I0435								
Lead	ND	---	0.200	ug/L	1	09/16/26 13:21	EPA 200.8	
22391700-027BF26A (A6I1374-25)				Matrix: Drinking Water				
Batch: 26I0435								
Lead	0.406	---	0.200	ug/L	1	09/16/26 13:23	EPA 200.8	
22391700-028WB26A (A6I1374-26)				Matrix: Drinking Water				
Batch: 26I0435								
Lead	ND	---	0.200	ug/L	1	09/16/26 13:25	EPA 200.8	

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.



ANALYTICAL REPORT

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

Apex Companies, LLC - Portland

4412 S Corbett Ave
Portland, OR 97239

Project: Hillsboro School District

Project Number: RA Brown MS/26010605

Project Manager: Dale Voeller

Report ID:

A6I1374 - 09 22 26 1218

ANALYTICAL SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Sample Result	Detection Limit	Reporting Limit	Units	Dilution	Date Analyzed	Method Ref.	Notes
22391700-029DW26A (A6I1374-27)				Matrix: Drinking Water				
Batch: 26I0435								
Lead	0.953	---	0.200	ug/L	1	09/16/26 13:27	EPA 200.8	
22391700-030DW26A (A6I1374-28)				Matrix: Drinking Water				
Batch: 26I0472								
Lead	ND	---	0.200	ug/L	1	09/18/26 11:41	EPA 200.8	
22391700-031BF26A (A6I1374-29)				Matrix: Drinking Water				
Batch: 26I0472								
Lead	0.629	---	0.200	ug/L	1	09/18/26 11:47	EPA 200.8	
22391700-032BF26A (A6I1374-30)				Matrix: Drinking Water				
Batch: 26I0472								
Lead	0.364	---	0.200	ug/L	1	09/18/26 11:49	EPA 200.8	
22391700-033DW26A (A6I1374-31)				Matrix: Drinking Water				
Batch: 26I0472								
Lead	ND	---	0.200	ug/L	1	09/18/26 11:55	EPA 200.8	
22391700-034DW26A (A6I1374-32)				Matrix: Drinking Water				
Batch: 26I0472								
Lead	0.809	---	0.200	ug/L	1	09/18/26 11:57	EPA 200.8	
22391700-036DW26A (A6I1374-33)				Matrix: Drinking Water				
Batch: 26I0472								
Lead	0.480	---	0.200	ug/L	1	09/18/26 11:59	EPA 200.8	
22391700-037CF26A (A6I1374-34)				Matrix: Drinking Water				
Batch: 26I0472								
Lead	0.213	---	0.200	ug/L	1	09/18/26 12:01	EPA 200.8	
22391700-038CF26A (A6I1374-35)				Matrix: Drinking Water				
Batch: 26I0472								
Lead	ND	---	0.200	ug/L	1	09/18/26 12:03	EPA 200.8	

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.



ANALYTICAL REPORT

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

Apex Companies, LLC - Portland

4412 S Corbett Ave
Portland, OR 97239

Project: Hillsboro School District

Project Number: RA Brown MS/26010605

Project Manager: Dale Voeller

Report ID:

A6I1374 - 09 22 26 1218

ANALYTICAL SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Sample Result	Detection Limit	Reporting Limit	Units	Dilution	Date Analyzed	Method Ref.	Notes
22391700-039DW26A (A6I1374-36)				Matrix: Drinking Water				
Batch: 26I0472								
Lead	0.235	---	0.200	ug/L	1	09/18/26 12:05	EPA 200.8	
22391700-040CF26A (A6I1374-37)				Matrix: Drinking Water				
Batch: 26I0472								
Lead	0.322	---	0.200	ug/L	1	09/18/26 12:07	EPA 200.8	
22391700-041DW26A (A6I1374-38)				Matrix: Drinking Water				
Batch: 26I0472								
Lead	0.378	---	0.200	ug/L	1	09/18/26 12:09	EPA 200.8	
22391700-042CF26A (A6I1374-39)				Matrix: Drinking Water				
Batch: 26I0472								
Lead	ND	---	0.200	ug/L	1	09/18/26 12:11	EPA 200.8	
22391700-044KF26A (A6I1374-40)				Matrix: Drinking Water				
Batch: 26I0472								
Lead	ND	---	0.200	ug/L	1	09/18/26 12:13	EPA 200.8	
22391700-045KF26A (A6I1374-41)				Matrix: Drinking Water				
Batch: 26I0472								
Lead	ND	---	0.200	ug/L	1	09/18/26 12:19	EPA 200.8	
22391700-046KF26A (A6I1374-42)				Matrix: Drinking Water				
Batch: 26I0472								
Lead	ND	---	0.200	ug/L	1	09/18/26 12:21	EPA 200.8	
22391700-049CF26A (A6I1374-43)				Matrix: Drinking Water				
Batch: 26I0472								
Lead	0.334	---	0.200	ug/L	1	09/18/26 12:23	EPA 200.8	
22391700-052CF26A (A6I1374-44)				Matrix: Drinking Water				
Batch: 26I0472								
Lead	0.583	---	0.200	ug/L	1	09/18/26 12:25	EPA 200.8	

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.



ANALYTICAL REPORT

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

Apex Companies, LLC - Portland

4412 S Corbett Ave
Portland, OR 97239

Project: Hillsboro School District

Project Number: RA Brown MS/26010605

Project Manager: Dale Voeller

Report ID:

A6I1374 - 09 22 26 1218

ANALYTICAL SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Sample Result	Detection Limit	Reporting Limit	Units	Dilution	Date Analyzed	Method Ref.	Notes
22391700-053DW26A (A6I1374-45RE3) Matrix: Drinking Water								
Batch: 26I0472								
Lead	0.295	---	0.200	ug/L	1	09/18/26 18:17	EPA 200.8	
22391700-054CF26A (A6I1374-46) Matrix: Drinking Water								
Batch: 26I0485								
Lead	0.279	---	0.200	ug/L	1	09/18/26 13:41	EPA 200.8	
22391700-055DW26A (A6I1374-47) Matrix: Drinking Water								
Batch: 26I0485								
Lead	0.405	---	0.200	ug/L	1	09/18/26 13:47	EPA 200.8	
22391700-056CF26A (A6I1374-48) Matrix: Drinking Water								
Batch: 26I0485								
Lead	ND	---	0.200	ug/L	1	09/18/26 13:49	EPA 200.8	
22391700-057CF26A (A6I1374-49) Matrix: Drinking Water								
Batch: 26I0485								
Lead	ND	---	0.200	ug/L	1	09/18/26 13:55	EPA 200.8	
22391700-058BF26A (A6I1374-50) Matrix: Drinking Water								
Batch: 26I0485								
Lead	ND	---	0.200	ug/L	1	09/18/26 13:57	EPA 200.8	
22391700-059BF26A (A6I1374-51) Matrix: Drinking Water								
Batch: 26I0485								
Lead	ND	---	0.200	ug/L	1	09/18/26 13:59	EPA 200.8	
22391700-060BF26A (A6I1374-52) Matrix: Drinking Water								
Batch: 26I0485								
Lead	ND	---	0.200	ug/L	1	09/18/26 14:01	EPA 200.8	
22391700-062BF26A (A6I1374-53) Matrix: Drinking Water								
Batch: 26I0485								
Lead	ND	---	0.200	ug/L	1	09/18/26 14:03	EPA 200.8	

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

**ANALYTICAL REPORT****Apex Laboratories, LLC**6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062**Apex Companies, LLC - Portland**
4412 S Corbett Ave
Portland, OR 97239Project: **Hillsboro School District**
Project Number: **RA Brown MS/26010605**
Project Manager: **Dale Voeller****Report ID:**
A6I1374 - 09 22 26 1218**ANALYTICAL SAMPLE RESULTS****Total Metals in Drinking Water by EPA 200.8 (ICPMS)**

Analyte	Sample Result	Detection Limit	Reporting Limit	Units	Dilution	Date Analyzed	Method Ref.	Notes
22391700-063WB26A (A6I1374-54)				Matrix: Drinking Water				
Batch: 26I0485								
Lead	ND	---	0.200	ug/L	1	09/18/26 14:05	EPA 200.8	
22391700-064DW26A (A6I1374-55)				Matrix: Drinking Water				
Batch: 26I0485								
Lead	ND	---	0.200	ug/L	1	09/18/26 14:07	EPA 200.8	
22391700-065DW26A (A6I1374-56)				Matrix: Drinking Water				
Batch: 26I0485								
Lead	ND	---	0.200	ug/L	1	09/18/26 14:09	EPA 200.8	
22391700-066BF26A (A6I1374-57)				Matrix: Drinking Water				
Batch: 26I0485								
Lead	ND	---	0.200	ug/L	1	09/18/26 14:11	EPA 200.8	
22391700-067BF26A (A6I1374-58)				Matrix: Drinking Water				
Batch: 26I0485								
Lead	ND	---	0.200	ug/L	1	09/18/26 14:13	EPA 200.8	
22391700-068BF26A (A6I1374-59)				Matrix: Drinking Water				
Batch: 26I0485								
Lead	ND	---	0.200	ug/L	1	09/18/26 14:19	EPA 200.8	
22391700-069BF26A (A6I1374-60)				Matrix: Drinking Water				
Batch: 26I0485								
Lead	ND	---	0.200	ug/L	1	09/18/26 14:21	EPA 200.8	
22391700-070BF26A (A6I1374-61)				Matrix: Drinking Water				
Batch: 26I0485								
Lead	ND	---	0.200	ug/L	1	09/18/26 14:23	EPA 200.8	
22391700-071DW26A (A6I1374-62)				Matrix: Drinking Water				
Batch: 26I0485								
Lead	1.67	---	0.200	ug/L	1	09/18/26 14:25	EPA 200.8	

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.



ANALYTICAL REPORT

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

Apex Companies, LLC - Portland

4412 S Corbett Ave
Portland, OR 97239

Project: Hillsboro School District

Project Number: RA Brown MS/26010605

Project Manager: Dale Voeller

Report ID:

A6I1374 - 09 22 26 1218

ANALYTICAL SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Sample Result	Detection Limit	Reporting Limit	Units	Dilution	Date Analyzed	Method Ref.	Notes
22391700-072CF26A (A6I1374-63)				Matrix: Drinking Water				
Batch: 26I0485								
Lead	ND	---	0.200	ug/L	1	09/18/26 14:27	EPA 200.8	
22391700-073DW26A (A6I1374-64)				Matrix: Drinking Water				
Batch: 26I0485								
Lead	ND	---	0.200	ug/L	1	09/18/26 14:29	EPA 200.8	
22391700-074CF26A (A6I1374-65)				Matrix: Drinking Water				
Batch: 26I0485								
Lead	ND	---	0.200	ug/L	1	09/18/26 14:31	EPA 200.8	
22391700-075DW26A (A6I1374-66)				Matrix: Drinking Water				
Batch: 26I0507								
Lead	ND	---	0.200	ug/L	1	09/18/26 14:43	EPA 200.8	
22391700-077DW26A (A6I1374-67RE1)				Matrix: Drinking Water				
Batch: 26I0507								
Lead	ND	---	0.200	ug/L	1	09/18/26 15:09	EPA 200.8	
22391700-079DW26A (A6I1374-68)				Matrix: Drinking Water				
Batch: 26I0507								
Lead	0.262	---	0.200	ug/L	1	09/18/26 14:51	EPA 200.8	
22391700-080DW26A (A6I1374-69)				Matrix: Drinking Water				
Batch: 26I0507								
Lead	0.233	---	0.200	ug/L	1	09/18/26 14:53	EPA 200.8	
22391700-081CF26A (A6I1374-70)				Matrix: Drinking Water				
Batch: 26I0507								
Lead	ND	---	0.200	ug/L	1	09/18/26 14:55	EPA 200.8	
22391700-082DW26A (A6I1374-71)				Matrix: Drinking Water				
Batch: 26I0507								
Lead	0.275	---	0.200	ug/L	1	09/18/26 14:57	EPA 200.8	

Apex Laboratories

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Jason Woodcock, Project Manager



ANALYTICAL REPORT

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

Apex Companies, LLC - Portland

4412 S Corbett Ave
Portland, OR 97239

Project: Hillsboro School District

Project Number: RA Brown MS/26010605

Project Manager: Dale Voeller

Report ID:

A6I1374 - 09 22 26 1218

ANALYTICAL SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Sample Result	Detection Limit	Reporting Limit	Units	Dilution	Date Analyzed	Method Ref.	Notes
22391700-083CF26A (A6I1374-72)				Matrix: Drinking Water				
Batch: 26I0507								
Lead	ND	---	0.200	ug/L	1	09/18/26 14:59	EPA 200.8	
22391700-084DW26A (A6I1374-73)				Matrix: Drinking Water				
Batch: 26I0507								
Lead	0.586	---	0.200	ug/L	1	09/18/26 15:15	EPA 200.8	
22391700-085CF26A (A6I1374-74)				Matrix: Drinking Water				
Batch: 26I0507								
Lead	ND	---	0.200	ug/L	1	09/18/26 15:17	EPA 200.8	
22391700-086DW26A (A6I1374-75)				Matrix: Drinking Water				
Batch: 26I0507								
Lead	0.401	---	0.200	ug/L	1	09/18/26 15:19	EPA 200.8	
22391700-087CF26A (A6I1374-76)				Matrix: Drinking Water				
Batch: 26I0507								
Lead	0.391	---	0.200	ug/L	1	09/18/26 15:21	EPA 200.8	
22391700-088BF26A (A6I1374-77)				Matrix: Drinking Water				
Batch: 26I0507								
Lead	ND	---	0.200	ug/L	1	09/18/26 15:23	EPA 200.8	
22391700-089BF26A (A6I1374-78)				Matrix: Drinking Water				
Batch: 26I0507								
Lead	ND	---	0.200	ug/L	1	09/18/26 15:25	EPA 200.8	
22391700-090BF26A (A6I1374-79)				Matrix: Drinking Water				
Batch: 26I0507								
Lead	0.334	---	0.200	ug/L	1	09/18/26 15:27	EPA 200.8	
22391700-091BF26A (A6I1374-80)				Matrix: Drinking Water				
Batch: 26I0507								
Lead	0.301	---	0.200	ug/L	1	09/18/26 15:29	EPA 200.8	

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

**ANALYTICAL REPORT****Apex Laboratories, LLC**6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062**Apex Companies, LLC - Portland**4412 S Corbett Ave
Portland, OR 97239Project: **Hillsboro School District**Project Number: **RA Brown MS/26010605**Project Manager: **Dale Voeller****Report ID:****A6I1374 - 09 22 26 1218****ANALYTICAL SAMPLE RESULTS****Total Metals in Drinking Water by EPA 200.8 (ICPMS)**

Analyte	Sample Result	Detection Limit	Reporting Limit	Units	Dilution	Date Analyzed	Method Ref.	Notes
22391700-092BF26A (A6I1374-81)				Matrix: Drinking Water				
Batch: 26I0507								
Lead	0.276	---	0.200	ug/L	1	09/18/26 15:31	EPA 200.8	
22391700-093BF26A (A6I1374-82)				Matrix: Drinking Water				
Batch: 26I0507								
Lead	0.490	---	0.200	ug/L	1	09/18/26 15:33	EPA 200.8	
22391700-094BF26A (A6I1374-83RE1)				Matrix: Drinking Water				
Batch: 26I0507								
Lead	1.60	---	0.200	ug/L	1	09/18/26 17:11	EPA 200.8	
22391700-095BF26A (A6I1374-84RE1)				Matrix: Drinking Water				
Batch: 26I0507								
Lead	0.610	---	0.200	ug/L	1	09/18/26 17:13	EPA 200.8	
22391700-096BF26A (A6I1374-85RE1)				Matrix: Drinking Water				
Batch: 26I0507								
Lead	1.91	---	0.200	ug/L	1	09/18/26 17:15	EPA 200.8	
22391700-097BF26A (A6I1374-86)				Matrix: Drinking Water				
Batch: 26I0526								
Lead	2.65	---	0.200	ug/L	1	09/18/26 13:09	EPA 200.8	
22391700-098DW26A (A6I1374-87)				Matrix: Drinking Water				
Batch: 26I0526								
Lead	0.955	---	0.200	ug/L	1	09/18/26 13:11	EPA 200.8	
22391700-099DW26A (A6I1374-88)				Matrix: Drinking Water				
Batch: 26I0526								
Lead	0.966	---	0.200	ug/L	1	09/18/26 13:13	EPA 200.8	
22391700-100SF26A (A6I1374-89)				Matrix: Drinking Water				
Batch: 26I0526								
Lead	ND	---	0.200	ug/L	1	09/18/26 13:15	EPA 200.8	

Apex Laboratories

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Jason Woodcock, Project Manager



ANALYTICAL REPORT

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

Apex Companies, LLC - Portland

4412 S Corbett Ave
Portland, OR 97239

Project: Hillsboro School District

Project Number: RA Brown MS/26010605

Project Manager: Dale Voeller

Report ID:

A6I1374 - 09 22 26 1218

ANALYTICAL SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Sample Result	Detection Limit	Reporting Limit	Units	Dilution	Date Analyzed	Method Ref.	Notes
22391700-101NS26A (A6I1374-90)				Matrix: Drinking Water				
Batch: 26I0526								
Lead	ND	---	0.200	ug/L	1	09/18/26 13:17	EPA 200.8	
22391700-102BF26A (A6I1374-91)				Matrix: Drinking Water				
Batch: 26I0526								
Lead	0.257	---	0.200	ug/L	1	09/18/26 13:19	EPA 200.8	
22391700-103BF26A (A6I1374-92)				Matrix: Drinking Water				
Batch: 26I0526								
Lead	0.386	---	0.200	ug/L	1	09/18/26 13:21	EPA 200.8	
22391700-104SF26A (A6I1374-93)				Matrix: Drinking Water				
Batch: 26I0526								
Lead	ND	---	0.200	ug/L	1	09/18/26 13:23	EPA 200.8	
22391700-105BF26A (A6I1374-94)				Matrix: Drinking Water				
Batch: 26I0526								
Lead	ND	---	0.200	ug/L	1	09/18/26 13:25	EPA 200.8	
22391700-106BF26A (A6I1374-95)				Matrix: Drinking Water				
Batch: 26I0526								
Lead	ND	---	0.200	ug/L	1	09/18/26 13:31	EPA 200.8	
22391700-107SF26A (A6I1374-96)				Matrix: Drinking Water				
Batch: 26I0526								
Lead	ND	---	0.200	ug/L	1	09/18/26 13:33	EPA 200.8	

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.



ANALYTICAL REPORT

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

Apex Companies, LLC - Portland

4412 S Corbett Ave
Portland, OR 97239

Project: Hillsboro School District

Project Number: RA Brown MS/26010605

Project Manager: Dale Voeller

Report ID:

A6I1374 - 09 22 26 1218

QUALITY CONTROL (QC) SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Result	Detection Limit	Reporting Limit	Units	Dilution	Spike Amount	Source Result	% REC	% REC Limits	RPD	RPD Limit	Notes
Batch 26I0421 - EPA 200.8 Direct Analysis							Drinking Water					
Blank (26I0421-BLK1)		Prepared: 09/16/26 07:10		Analyzed: 09/16/26 18:44								
EPA 200.8												
Lead	ND	---	0.200	ug/L	1	---	---	---	---	---	---	
LCS (26I0421-BS1)		Prepared: 09/16/26 07:10		Analyzed: 09/16/26 18:46								
EPA 200.8												
Lead	14.2	---	0.201	ug/L	1	15.0	---	95	85 - 115%	---	---	
Matrix Spike (26I0421-MS2)		Prepared: 09/16/26 07:10		Analyzed: 09/16/26 19:40								
QC Source Sample: 22391700-020DW26A (A6I1374-19)												
EPA 200.8												
Lead	13.6	---	0.201	ug/L	1	15.0	0.101	90	70 - 130%	---	---	
Batch 26I0435 - EPA 200.8 Direct Analysis							Drinking Water					
Blank (26I0435-BLK1)		Prepared: 09/16/26 09:08		Analyzed: 09/16/26 13:09								
EPA 200.8												
Lead	ND	---	0.200	ug/L	1	---	---	---	---	---	---	
LCS (26I0435-BS1)		Prepared: 09/16/26 09:08		Analyzed: 09/16/26 13:11								
EPA 200.8												
Lead	15.3	---	0.201	ug/L	1	15.0	---	102	85 - 115%	---	---	

No Client related Batch QC samples analyzed for this batch. See notes page for more information.

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.



ANALYTICAL REPORT

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

Apex Companies, LLC - Portland

4412 S Corbett Ave
Portland, OR 97239

Project: Hillsboro School District

Project Number: RA Brown MS/26010605

Project Manager: Dale Voeller

Report ID:

A6I1374 - 09 22 26 1218

QUALITY CONTROL (QC) SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Result	Detection Limit	Reporting Limit	Units	Dilution	Spike Amount	Source Result	% REC	% REC Limits	RPD	RPD Limit	Notes
Batch 26I0472 - EPA 200.8 Direct Analysis							Drinking Water					
Blank (26I0472-BLK1)		Prepared: 09/17/26 06:56			Analyzed: 09/18/26 11:37							
EPA 200.8												
Lead	ND	---	0.200	ug/L	1	---	---	---	---	---	---	
LCS (26I0472-BS1)		Prepared: 09/17/26 06:56			Analyzed: 09/18/26 11:39							
EPA 200.8												
Lead	15.1	---	0.201	ug/L	1	15.0	---	101	85 - 115%	---	---	
Duplicate (26I0472-DUP1)		Prepared: 09/17/26 06:56			Analyzed: 09/18/26 11:43							
QC Source Sample: 22391700-030DW26A (A6I1374-28)												
EPA 200.8												
Lead	ND	---	0.200	ug/L	1	---	ND	---	---	---	20%	
Matrix Spike (26I0472-MS1)		Prepared: 09/17/26 06:56			Analyzed: 09/18/26 11:45							
QC Source Sample: 22391700-030DW26A (A6I1374-28)												
EPA 200.8												
Lead	14.9	---	0.201	ug/L	1	15.0	ND	100	70 - 130%	---	---	

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.



ANALYTICAL REPORT

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

Apex Companies, LLC - Portland

4412 S Corbett Ave
Portland, OR 97239

Project: Hillsboro School District

Project Number: RA Brown MS/26010605
Project Manager: Dale Voeller

Report ID:

A6I1374 - 09 22 26 1218

QUALITY CONTROL (QC) SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Result	Detection Limit	Reporting Limit	Units	Dilution	Spike Amount	Source Result	% REC	% REC Limits	RPD	RPD Limit	Notes
Batch 26I0485 - EPA 200.8 Direct Analysis							Drinking Water					
Blank (26I0485-BLK1)		Prepared: 09/17/26 08:58		Analyzed: 09/18/26 13:37								
EPA 200.8												
Lead	ND	---	0.200	ug/L	1	---	---	---	---	---	---	
LCS (26I0485-BS1)		Prepared: 09/17/26 08:58		Analyzed: 09/18/26 13:39								
EPA 200.8												
Lead	15.3	---	0.201	ug/L	1	15.0	---	102	85 - 115%	---	---	
Duplicate (26I0485-DUP1)		Prepared: 09/17/26 08:58		Analyzed: 09/18/26 13:43								
QC Source Sample: 22391700-054CF26A (A6I1374-46)												
EPA 200.8												
Lead	0.262	---	0.200	ug/L	1	---	0.279	---	---	6	20%	
Matrix Spike (26I0485-MS1)		Prepared: 09/17/26 08:58		Analyzed: 09/18/26 13:45								
QC Source Sample: 22391700-054CF26A (A6I1374-46)												
EPA 200.8												
Lead	15.5	---	0.201	ug/L	1	15.0	0.279	102	70 - 130%	---	---	
Matrix Spike (26I0485-MS2)		Prepared: 09/17/26 08:58		Analyzed: 09/18/26 14:33								
QC Source Sample: 22391700-074CF26A (A6I1374-65)												
EPA 200.8												
Lead	15.4	---	0.201	ug/L	1	15.0	0.170	102	70 - 130%	---	---	

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.



ANALYTICAL REPORT

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

Apex Companies, LLC - Portland

4412 S Corbett Ave
Portland, OR 97239

Project: Hillsboro School District

Project Number: RA Brown MS/26010605
Project Manager: Dale Voeller

Report ID:

A6I1374 - 09 22 26 1218

QUALITY CONTROL (QC) SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Result	Detection Limit	Reporting Limit	Units	Dilution	Spike Amount	Source Result	% REC	% REC Limits	RPD	RPD Limit	Notes
Batch 26I0507 - EPA 200.8 Direct Analysis							Drinking Water					
Blank (26I0507-BLK1)		Prepared: 09/17/26 13:51			Analyzed: 09/18/26 14:35							
<u>EPA 200.8</u>												
Lead	ND	---	0.200	ug/L	1	---	---	---	---	---	---	
LCS (26I0507-BS1)		Prepared: 09/17/26 13:51			Analyzed: 09/18/26 14:37							
<u>EPA 200.8</u>												
Lead	15.3	---	0.201	ug/L	1	15.0	---	102	85 - 115%	---	---	
Duplicate (26I0507-DUP1)		Prepared: 09/17/26 13:51			Analyzed: 09/18/26 14:45							
<u>QC Source Sample: 22391700-075DW26A (A6I1374-66)</u>												
<u>EPA 200.8</u>												
Lead	0.203	---	0.200	ug/L	1	---	0.197	---	---	3	20%	
Matrix Spike (26I0507-MS1)		Prepared: 09/17/26 13:51			Analyzed: 09/18/26 14:47							
<u>QC Source Sample: 22391700-075DW26A (A6I1374-66)</u>												
<u>EPA 200.8</u>												
Lead	15.9	---	0.201	ug/L	1	15.0	0.197	104	70 - 130%	---	---	
Matrix Spike (26I0507-MS3)		Prepared: 09/17/26 13:51			Analyzed: 09/18/26 17:17							
<u>QC Source Sample: 22391700-096BF26A (A6I1374-85RE1)</u>												
<u>EPA 200.8</u>												
Lead	17.1	---	0.201	ug/L	1	15.0	1.91	102	70 - 130%	---	---	Q-16

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.



ANALYTICAL REPORT

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

Apex Companies, LLC - Portland
4412 S Corbett Ave
Portland, OR 97239

Project: Hillsboro School District
Project Number: RA Brown MS/26010605
Project Manager: Dale Voeller

Report ID:
A611374 - 09 22 26 1218

QUALITY CONTROL (QC) SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Result	Detection Limit	Reporting Limit	Units	Dilution	Spike Amount	Source Result	% REC	% REC Limits	RPD	RPD Limit	Notes
Batch 26I0526 - EPA 200.8 Direct Analysis							Drinking Water					
Blank (26I0526-BLK1)		Prepared: 09/18/26 07:16			Analyzed: 09/18/26 12:35							
EPA 200.8												
Lead	ND	---	0.200	ug/L	1	---	---	---	---	---	---	
LCS (26I0526-BS1)		Prepared: 09/18/26 07:16			Analyzed: 09/18/26 12:37							
EPA 200.8												
Lead	15.6	---	0.201	ug/L	1	15.0	---	104	85 - 115%	---	---	
Matrix Spike (26I0526-MS2)		Prepared: 09/18/26 07:16			Analyzed: 09/18/26 13:35							
QC Source Sample: 22391700-107SF26A (A6I1374-96)												
EPA 200.8												
Lead	15.7	---	0.201	ug/L	1	15.0	ND	104	70 - 130%	---	---	

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

**ANALYTICAL REPORT****Apex Laboratories, LLC**6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323

ORELAP ID: OR100062

Apex Companies, LLC - Portland4412 S Corbett Ave
Portland, OR 97239Project: **Hillsboro School District**Project Number: **RA Brown MS/26010605**Project Manager: **Dale Voeller****Report ID:****A6I1374 - 09 22 26 1218****SAMPLE PREPARATION INFORMATION****Total Metals in Drinking Water by EPA 200.8 (ICPMS)****Prep: EPA 200.8 Direct Analysis**

Lab Number	Matrix	Method	Sampled	Prepared	Sample Initial/Final	Default Initial/Final	RL Prep Factor
Batch: 26I0421							
A6I1374-01	Drinking Water	EPA 200.8	09/12/26 00:00	09/16/26 07:10	10mL/10mL	10mL/10mL	1.00
A6I1374-02	Drinking Water	EPA 200.8	09/12/26 00:00	09/16/26 07:10	10mL/10mL	10mL/10mL	1.00
A6I1374-03	Drinking Water	EPA 200.8	09/12/26 00:00	09/16/26 07:10	10mL/10mL	10mL/10mL	1.00
A6I1374-04	Drinking Water	EPA 200.8	09/12/26 00:00	09/16/26 07:10	10mL/10mL	10mL/10mL	1.00
A6I1374-05	Drinking Water	EPA 200.8	09/12/26 00:00	09/16/26 07:10	10mL/10mL	10mL/10mL	1.00
A6I1374-06	Drinking Water	EPA 200.8	09/12/26 00:00	09/16/26 07:10	10mL/10mL	10mL/10mL	1.00
A6I1374-07	Drinking Water	EPA 200.8	09/12/26 00:00	09/16/26 07:10	10mL/10mL	10mL/10mL	1.00
A6I1374-08	Drinking Water	EPA 200.8	09/12/26 00:00	09/16/26 07:10	10mL/10mL	10mL/10mL	1.00
A6I1374-09	Drinking Water	EPA 200.8	09/12/26 00:00	09/16/26 07:10	10mL/10mL	10mL/10mL	1.00
A6I1374-10	Drinking Water	EPA 200.8	09/12/26 00:00	09/16/26 07:10	10mL/10mL	10mL/10mL	1.00
A6I1374-11	Drinking Water	EPA 200.8	09/12/26 00:00	09/16/26 07:10	10mL/10mL	10mL/10mL	1.00
A6I1374-12	Drinking Water	EPA 200.8	09/12/26 00:00	09/16/26 07:10	10mL/10mL	10mL/10mL	1.00
A6I1374-13	Drinking Water	EPA 200.8	09/12/26 00:00	09/16/26 07:10	10mL/10mL	10mL/10mL	1.00
A6I1374-14	Drinking Water	EPA 200.8	09/12/26 00:00	09/16/26 07:10	10mL/10mL	10mL/10mL	1.00
A6I1374-15	Drinking Water	EPA 200.8	09/12/26 00:00	09/16/26 07:10	10mL/10mL	10mL/10mL	1.00
A6I1374-16	Drinking Water	EPA 200.8	09/12/26 00:00	09/16/26 07:10	10mL/10mL	10mL/10mL	1.00
A6I1374-17	Drinking Water	EPA 200.8	09/12/26 00:00	09/16/26 07:10	10mL/10mL	10mL/10mL	1.00
A6I1374-18	Drinking Water	EPA 200.8	09/12/26 00:00	09/16/26 07:10	10mL/10mL	10mL/10mL	1.00
A6I1374-19	Drinking Water	EPA 200.8	09/12/26 00:00	09/16/26 07:10	10mL/10mL	10mL/10mL	1.00
Batch: 26I0435							
A6I1374-20	Drinking Water	EPA 200.8	09/12/26 00:00	09/16/26 09:08	10mL/10mL	10mL/10mL	1.00
A6I1374-21	Drinking Water	EPA 200.8	09/12/26 00:00	09/16/26 09:08	10mL/10mL	10mL/10mL	1.00
A6I1374-22	Drinking Water	EPA 200.8	09/12/26 00:00	09/16/26 09:08	10mL/10mL	10mL/10mL	1.00
A6I1374-23	Drinking Water	EPA 200.8	09/12/26 00:00	09/16/26 09:08	10mL/10mL	10mL/10mL	1.00
A6I1374-24	Drinking Water	EPA 200.8	09/12/26 00:00	09/16/26 09:08	10mL/10mL	10mL/10mL	1.00
A6I1374-25	Drinking Water	EPA 200.8	09/12/26 00:00	09/16/26 09:08	10mL/10mL	10mL/10mL	1.00
A6I1374-26	Drinking Water	EPA 200.8	09/12/26 00:00	09/16/26 09:08	10mL/10mL	10mL/10mL	1.00
A6I1374-27	Drinking Water	EPA 200.8	09/12/26 00:00	09/16/26 09:08	10mL/10mL	10mL/10mL	1.00
Batch: 26I0472							
A6I1374-28	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 06:56	10mL/10mL	10mL/10mL	1.00
A6I1374-29	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 06:56	10mL/10mL	10mL/10mL	1.00
A6I1374-30	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 06:56	10mL/10mL	10mL/10mL	1.00
A6I1374-31	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 06:56	10mL/10mL	10mL/10mL	1.00
A6I1374-32	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 06:56	10mL/10mL	10mL/10mL	1.00
A6I1374-33	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 06:56	10mL/10mL	10mL/10mL	1.00

Apex Laboratories

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Jason Woodcock, Project Manager

**ANALYTICAL REPORT****Apex Laboratories, LLC**6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062**Apex Companies, LLC - Portland**4412 S Corbett Ave
Portland, OR 97239Project: **Hillsboro School District**Project Number: **RA Brown MS/26010605**Project Manager: **Dale Voeller****Report ID:****A6I1374 - 09 22 26 1218****SAMPLE PREPARATION INFORMATION****Total Metals in Drinking Water by EPA 200.8 (ICPMS)****Prep: EPA 200.8 Direct Analysis**

Lab Number	Matrix	Method	Sampled	Prepared	Sample Initial/Final	Default Initial/Final	RL Prep Factor
A6I1374-34	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 06:56	10mL/10mL	10mL/10mL	1.00
A6I1374-35	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 06:56	10mL/10mL	10mL/10mL	1.00
A6I1374-36	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 06:56	10mL/10mL	10mL/10mL	1.00
A6I1374-37	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 06:56	10mL/10mL	10mL/10mL	1.00
A6I1374-38	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 06:56	10mL/10mL	10mL/10mL	1.00
A6I1374-39	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 06:56	10mL/10mL	10mL/10mL	1.00
A6I1374-40	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 06:56	10mL/10mL	10mL/10mL	1.00
A6I1374-41	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 06:56	10mL/10mL	10mL/10mL	1.00
A6I1374-42	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 06:56	10mL/10mL	10mL/10mL	1.00
A6I1374-43	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 06:56	10mL/10mL	10mL/10mL	1.00
A6I1374-44	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 06:56	10mL/10mL	10mL/10mL	1.00
A6I1374-45RE3	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 06:56	10mL/10mL	10mL/10mL	1.00
Batch: 26I0485							
A6I1374-46	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 08:58	10mL/10mL	10mL/10mL	1.00
A6I1374-47	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 08:58	10mL/10mL	10mL/10mL	1.00
A6I1374-48	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 08:58	10mL/10mL	10mL/10mL	1.00
A6I1374-49	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 08:58	10mL/10mL	10mL/10mL	1.00
A6I1374-50	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 08:58	10mL/10mL	10mL/10mL	1.00
A6I1374-51	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 08:58	10mL/10mL	10mL/10mL	1.00
A6I1374-52	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 08:58	10mL/10mL	10mL/10mL	1.00
A6I1374-53	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 08:58	10mL/10mL	10mL/10mL	1.00
A6I1374-54	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 08:58	10mL/10mL	10mL/10mL	1.00
A6I1374-55	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 08:58	10mL/10mL	10mL/10mL	1.00
A6I1374-56	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 08:58	10mL/10mL	10mL/10mL	1.00
A6I1374-57	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 08:58	10mL/10mL	10mL/10mL	1.00
A6I1374-58	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 08:58	10mL/10mL	10mL/10mL	1.00
A6I1374-59	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 08:58	10mL/10mL	10mL/10mL	1.00
A6I1374-60	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 08:58	10mL/10mL	10mL/10mL	1.00
A6I1374-61	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 08:58	10mL/10mL	10mL/10mL	1.00
A6I1374-62	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 08:58	10mL/10mL	10mL/10mL	1.00
A6I1374-63	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 08:58	10mL/10mL	10mL/10mL	1.00
A6I1374-64	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 08:58	10mL/10mL	10mL/10mL	1.00
A6I1374-65	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 08:58	10mL/10mL	10mL/10mL	1.00
Batch: 26I0507							
A6I1374-66	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 13:51	10mL/10mL	10mL/10mL	1.00
A6I1374-67RE1	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 13:51	10mL/10mL	10mL/10mL	1.00

Apex Laboratories

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Jason Woodcock, Project Manager

**ANALYTICAL REPORT****Apex Laboratories, LLC**6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323

ORELAP ID: OR100062

Apex Companies, LLC - Portland4412 S Corbett Ave
Portland, OR 97239Project: **Hillsboro School District**Project Number: **RA Brown MS/26010605**Project Manager: **Dale Voeller****Report ID:****A6I1374 - 09 22 26 1218****SAMPLE PREPARATION INFORMATION****Total Metals in Drinking Water by EPA 200.8 (ICPMS)****Prep: EPA 200.8 Direct Analysis**

Lab Number	Matrix	Method	Sampled	Prepared	Sample Initial/Final	Default Initial/Final	RL Prep Factor
A6I1374-68	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 13:51	10mL/10mL	10mL/10mL	1.00
A6I1374-69	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 13:51	10mL/10mL	10mL/10mL	1.00
A6I1374-70	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 13:51	10mL/10mL	10mL/10mL	1.00
A6I1374-71	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 13:51	10mL/10mL	10mL/10mL	1.00
A6I1374-72	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 13:51	10mL/10mL	10mL/10mL	1.00
A6I1374-73	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 13:51	10mL/10mL	10mL/10mL	1.00
A6I1374-74	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 13:51	10mL/10mL	10mL/10mL	1.00
A6I1374-75	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 13:51	10mL/10mL	10mL/10mL	1.00
A6I1374-76	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 13:51	10mL/10mL	10mL/10mL	1.00
A6I1374-77	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 13:51	10mL/10mL	10mL/10mL	1.00
A6I1374-78	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 13:51	10mL/10mL	10mL/10mL	1.00
A6I1374-79	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 13:51	10mL/10mL	10mL/10mL	1.00
A6I1374-80	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 13:51	10mL/10mL	10mL/10mL	1.00
A6I1374-81	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 13:51	10mL/10mL	10mL/10mL	1.00
A6I1374-82	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 13:51	10mL/10mL	10mL/10mL	1.00
A6I1374-83RE1	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 13:51	10mL/10mL	10mL/10mL	1.00
A6I1374-84RE1	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 13:51	10mL/10mL	10mL/10mL	1.00
A6I1374-85RE1	Drinking Water	EPA 200.8	09/12/26 00:00	09/17/26 13:51	10mL/10mL	10mL/10mL	1.00
Batch: 26I0526							
A6I1374-86	Drinking Water	EPA 200.8	09/12/26 00:00	09/18/26 07:16	10mL/10mL	10mL/10mL	1.00
A6I1374-87	Drinking Water	EPA 200.8	09/12/26 00:00	09/18/26 07:16	10mL/10mL	10mL/10mL	1.00
A6I1374-88	Drinking Water	EPA 200.8	09/12/26 00:00	09/18/26 07:16	10mL/10mL	10mL/10mL	1.00
A6I1374-89	Drinking Water	EPA 200.8	09/12/26 00:00	09/18/26 07:16	10mL/10mL	10mL/10mL	1.00
A6I1374-90	Drinking Water	EPA 200.8	09/12/26 00:00	09/18/26 07:16	10mL/10mL	10mL/10mL	1.00
A6I1374-91	Drinking Water	EPA 200.8	09/12/26 00:00	09/18/26 07:16	10mL/10mL	10mL/10mL	1.00
A6I1374-92	Drinking Water	EPA 200.8	09/12/26 00:00	09/18/26 07:16	10mL/10mL	10mL/10mL	1.00
A6I1374-93	Drinking Water	EPA 200.8	09/12/26 00:00	09/18/26 07:16	10mL/10mL	10mL/10mL	1.00
A6I1374-94	Drinking Water	EPA 200.8	09/12/26 00:00	09/18/26 07:16	10mL/10mL	10mL/10mL	1.00
A6I1374-95	Drinking Water	EPA 200.8	09/12/26 00:00	09/18/26 07:16	10mL/10mL	10mL/10mL	1.00
A6I1374-96	Drinking Water	EPA 200.8	09/12/26 00:00	09/18/26 07:16	10mL/10mL	10mL/10mL	1.00

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.



ANALYTICAL REPORT

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

Apex Companies, LLC - Portland

4412 S Corbett Ave
Portland, OR 97239

Project: Hillsboro School District

Project Number: RA Brown MS/26010605

Project Manager: Dale Voeller

Report ID:

A6I1374 - 09 22 26 1218

QUALIFIER DEFINITIONS

Client Sample and Quality Control (QC) Sample Qualifier Definitions:

Apex Laboratories

Q-16 Reanalysis of an original Batch QC sample.

Apex Laboratories

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Jason Woodcock, Project Manager



ANALYTICAL REPORT

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

Apex Companies, LLC - Portland

4412 S Corbett Ave
Portland, OR 97239

Project: **Hillsboro School District**

Project Number: **RA Brown MS/26010605**

Project Manager: **Dale Voeller**

Report ID:

A6I1374 - 09 22 26 1218

REPORTING NOTES AND CONVENTIONS:

Abbreviations:

DET Analyte DETECTED at or above the detection or reporting limit.
ND Analyte NOT DETECTED at or above the detection or reporting limit.
NR Result Not Reported.
RPD Relative Percent Difference. RPDs for Matrix Spikes and Matrix Spike Duplicates are based on concentration, not recovery.

Detection Limits: Limit of Detection (LOD)

Limits of Detection (LODs) are normally set at a level of one half the validated Limit of Quantitation (LOQ).
If no value is listed ('-----'), then the data has not been evaluated below the Reporting Limit.

Reporting Limits: Limit of Quantitation (LOQ)

Validated Limits of Quantitation (LOQs) are reported as the Reporting Limits for all analyses where the LOQ, MRL, PQL or CRL are requested. The LOQ represents a level at or above the low point of the calibration curve, that has been validated according to Apex Laboratories' comprehensive LOQ policies and procedures.

Reporting and Detection Limits: Default Limits

Default Reporting and Detection Limits are based on 100% dry weight with the minimum dilution for the analysis. Reporting and Detection Limits are raised due to moisture content, additional dilutions required for analysis, matrix interferences and in other cases, as necessary.

Reporting Conventions:

Basis: Results for soil samples are generally reported on a 100% dry weight basis.

Results where dry weight correction has not been applied do not have the "dry" designation appended to the units, and results are reported on an "as received" basis.

Results for Volatiles analyses on soils and sediments that are reported on a "dry weight" basis include the water miscible solvent (WMS) correction referenced in the EPA 8000 Method guidance documents. Solid and Liquid samples reported on an "As Received" basis do not have the WMS correction applied, as dry weight was not performed.

QC Source:

In cases where there is insufficient sample provided for Sample Duplicates and/or Matrix Spikes, a Lab Control Sample Duplicate (LCS Dup) may be analyzed to demonstrate accuracy and precision of the extraction batch.

Non-Client Batch QC Samples (Duplicates and Matrix Spike/Duplicates) are not included in this report. Please request a Full QC report if this data is required.

Miscellaneous Notes:

" --- " QC results are not applicable. For example, % Recoveries for Blanks and Duplicates, % RPD for Blanks, Blank Spikes and Matrix Spikes, etc.

" *** " Used to indicate a possible discrepancy with the Sample and Sample Duplicate results when the %RPD is not available. In this case, either the Sample or the Sample Duplicate has a reportable result for this analyte, while the other is Non Detect (ND).

Apex Laboratories

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Jason Woodcock, Project Manager



ANALYTICAL REPORT

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

Apex Companies, LLC - Portland

4412 S Corbett Ave
Portland, OR 97239

Project: Hillsboro School District

Project Number: RA Brown MS/26010605

Project Manager: Dale Voeller

Report ID:

A6I1374 - 09 22 26 1218

REPORTING NOTES AND CONVENTIONS (Cont.):

Blanks:

Standard practice is to evaluate the results from Blank QC Samples down to a level equal to one half of the Reporting Limit (RL).

Blank results for gravimetric analyses are evaluated to the Reporting Level, not to half of the Reporting Level.

-For Blank hits falling between ½ the RL and the RL (J flagged hits), the associated sample and QC data will receive a 'B-02' qualifier.

-For Blank hits above the RL, the associated sample and QC data will receive a 'B' qualifier, per Apex Laboratories' Blank Policy.

For further details, please request a copy of this document.

Sample results flagged with a 'B' or 'B-02' qualifier are potentially biased high if the sample results are less than ten times the level found in the blank for inorganic analyses, or less than five times the level found in the blank for organic analyses.

'B' and 'B-02' qualifications are only applied to sample results detected above the Reporting Level.

Preparation Notes:

Mixed Matrix Samples:

Water Samples:

Water samples containing significant amounts of sediment are decanted or separated prior to extraction, and only the water portion analyzed, unless otherwise directed by the client.

Soil and Sediment Samples:

Soil and Sediment samples containing significant amounts of water are decanted prior to extraction, and only the solid portion analyzed, unless otherwise directed by the client.

Sampling and Preservation Notes:

Certain regulatory programs, such as National Pollutant Discharge Elimination System (NPDES), require that activities such as sample filtration (for dissolved metals, orthophosphate, hexavalent chromium, etc.) and testing of short hold analytes (pH, Dissolved Oxygen, etc.) be performed in the field (on-site) within a short time window. In addition, sample matrix spikes are required for some analyses, and sufficient volume must be provided, and billable site specific QC requested, if this is required. All regulatory permits should be reviewed to ensure that these requirements are being met.

Data users should be aware of which regulations pertain to the samples they submit for testing. If related sample collection activities are not approved for a particular regulatory program, results should be considered estimates. Apex Laboratories will qualify these analytes according to the most stringent requirements, however results for samples that are for non-regulatory purposes may be acceptable.

Apex Laboratories

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Jason Woodcock, Project Manager



ANALYTICAL REPORT

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

Apex Companies, LLC - Portland

4412 S Corbett Ave
Portland, OR 97239

Project: **Hillsboro School District**

Project Number: **RA Brown MS/26010605**

Project Manager: **Dale Voeller**

Report ID:

A6I1374 - 09 22 26 1218

Decanted Samples:

Soils/Sediments:

Unless TCLP analysis is required or there is notification otherwise for a specific project, all Soil and Sediments containing excess water are decanted prior to analysis in order to provide the most representative sample for analysis.

Water Samples:

Water samples containing solids and sediment may need to be decanted in order to eliminate these particulates from the water extractions. In the case of organics extractions, a solvent rinse of the container will not be performed.

Volatiles Soils (5035s)

Samples that are field preserved by 5035 for volatiles are dry weight corrected using the same dry weight correction as for normal analyses.

In the case of decanted samples, the dry weight may be performed on a decanted sample, while the aliquot for 5035 may not have been treated the same way. If this is a concern, please submit separate containers for dry weight analysis for volatiles can be provided.

All samples decanted in the laboratory are noted in this report with the DCNT qualifier indicating the sample was decanted.

Apex Laboratories

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Jason Woodcock, Project Manager



ANALYTICAL REPORT

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

Apex Companies, LLC - Portland

4412 S Corbett Ave
Portland, OR 97239

Project: **Hillsboro School District**

Project Number: **RA Brown MS/26010605**

Project Manager: **Dale Voeller**

Report ID:

A611374 - 09 22 26 1218

LABORATORY ACCREDITATION INFORMATION

ORELAP Certification ID: OR100062 (Primary Accreditation)

EPA ID: OR01039

All methods and analytes reported from work performed at Apex Laboratories are included on Apex Laboratories' ORELAP Scope of Certification, with the exception of any analyte(s) listed below:

Apex Laboratories

Matrix	Analysis	Analyte	TNI_ID	Accreditation
--------	----------	---------	--------	---------------

All reported analytes are included in Apex Laboratories' current ORELAP scope.

Secondary Accreditations

Apex Laboratories also maintains reciprocal accreditation with non-TNI states (Washington DOE), as well as other state specific accreditations not listed here.

Subcontract Laboratory Accreditations

Subcontracted data falls outside of Apex Laboratories' Scope of Accreditation.

Please see the Subcontract Laboratory report for full details, or contact your Project Manager for more information.

Field Testing Parameters

Results for Field Tested data are provided by the client or sampler, and fall outside of Apex Laboratories' Scope of Accreditation.

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.



ANALYTICAL REPORT

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

Apex Companies, LLC - Portland

4412 S Corbett Ave
Portland, OR 97239

Project: Hillsboro School District

Project Number: RA Brown MS/26010605

Project Manager: Dale Voeller

Report ID:

A6I1374 - 09 22 26 1218

Lead in Drinking Water Testing Program

A6I1374

Date Collected: 09/12/2026

PBS Project: 26010605 / 0009

School Name: RA Brown MS

Building: Main Building - Round 1

Building Number: 22391700

Analysis Requested: Lead (Pb) in Drinking Water

Email Results To: dale.voeller@apexcos.com

Turnaround Time: 10-day

	Fixture Number	Sample Number	Location / Description
1	001		Main entrance drinking fountain - left - NOT WORKING
2	002	22391700-002DW26A	Main entrance drinking fountain - right
3	003	22391700-003KF26A	Cafeteria snack shop- sink faucet
4	004	22391700-004KF26A	Kitchen, east office sink
5	005	22391700-005KF26A	Kitchen, front (south) prep sink
6	006	22391700-006KF26A	Kitchen, back (north) prep sink
7	007	22391700-007BF26A	Kitchen office restroom sink
8	008	22391700-008CF26A	Stage attic boys dressing room sink
9	009	22391700-009CF26A	Stage attic girls dressing room sink
10	010	22391700-010DW26A	Choir Room drinking fountain
11	011	22391700-011CF26A	Choir Room classroom faucet
12	012	22391700-012BF26A	Girls restroom north of kitchen, restroom sinks - left to right (1)
13	013	22391700-013BF26A	Girls restroom north of kitchen, restroom sinks - left to right (2)
14	014	22391700-014BF26A	Girls restroom north of kitchen, restroom sinks - left to right (3)
15	015	22391700-015BF26A	Girls restroom north of kitchen, restroom sinks - left to right (4)
16	016	22391700-016BF26A	Boys restroom north of kitchen, restroom sinks - left to right (1)
17	017	22391700-017BF26A	Boys restroom north of kitchen, restroom sinks - left to right (2)
18	018	22391700-018BF26A	Boys restroom north of kitchen, restroom sinks - left to right (3)
19	019	22391700-019BF26A	Boys restroom north of kitchen, restroom sinks - left to right (4)
20	020	22391700-020DW26A	Room G2, Art, drinking fountain
21	021	22391700-021CF26A	Room G2, Art, sink faucet - left
22	022	22391700-022CF26A	Room G2, Art, sink faucet - right
23	023	22391700-023WB26A	Hallway at gym - water bottle filler
24	024	22391700-024DW26A	Hallway at gym - drinking fountain
25	025		NW corner of main gym - drinking fountain - NOT WORKING

1 of 4

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.



ANALYTICAL REPORT

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

Apex Companies, LLC - Portland

4412 S Corbett Ave
Portland, OR 97239

Project: Hillsboro School District

Project Number: RA Brown MS/26010605

Project Manager: Dale Voeller

Report ID:

A6I1374 - 09 22 26 1218

Lead in Drinking Water Testing Program

Hillsboro School District

Date Collected: 09/12/2026

School Name: RA Brown MS

	Fixture Number	Sample Number	Location / Description
26	026	22391700-026BF26A	Boys locker room restroom sink faucet - left
27	027	22391700-027BF26A	Boys locker room restroom sink faucet - right
28	028	22391700-028WB26A	Hallway north of locker rooms - water bottle filler
29	029	22391700-029DW26A	Hallway north of locker rooms, drinking fountain - left
30	030	22391700-030DW26A	Hallway north of locker rooms, drinking fountain - right
31	031	22391700-031BF26A	Girls locker room restroom sink faucet - left
32	032	22391700-032BF26A	Girls locker room restroom sink faucet - right
33	033	22391700-033DW26A	Upper gym, west wall, drinking fountain
34	034	22391700-034DW26A	Room G3, drinking fountain
35	035		Room G3, classroom faucet - NOT WORKING
36	036	22391700-036DW26A	Room G4, drinking fountain
37	037	22391700-037CF26A	Room G4, classroom faucet
38	038	22391700-038CF26A	Room G5, classroom faucet
39	039	22391700-039DW26A	Room G6, drinking fountain
40	040	22391700-040CF26A	Room G6, classroom faucet
41	041	22391700-041DW26A	Room G8, drinking fountain
42	042	22391700-042CF26A	Room G8, classroom faucet
43	043	Fixture Removed	Room G7, prep sinks, clockwise, starting at NW sink closest to door (1)
44	044	22391700-044KF26A	Room G7, prep sinks, clockwise, starting at NW sink closest to door (2)
45	045	22391700-045KF26A	Room G7, prep sinks, clockwise, starting at NW sink closest to door (3)
46	046	22391700-046KF26A	Room G7, prep sinks, clockwise, starting at NW sink closest to door (4)
47	047	Fixture Removed	Room G7, prep sinks, clockwise, starting at NW sink closest to door (5)
48	048	Fixture Removed	Room G7, prep sinks, clockwise, starting at NW sink closest to door (6)
49	049	22391700-049CF26A	Room R1 - classroom faucet at west wall
50	050		Room R1 - drinking fountain in SW corner - NOT WORKING
51	051		Room R1 - classroom faucet in SW corner - NOT WORKING
52	052	22391700-052CF26A	Room R2 - classroom faucet
53	053	22391700-053DW26A	Room R4 - drinking fountain
54	054	22391700-054CF26A	Room R4 - classroom faucet
55	055	22391700-055DW26A	Room R6 - drinking fountain
56	056	22391700-056CF26A	Room R6 - classroom faucet



2 of 4

Apex Laboratories

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Jason Woodcock, Project Manager

Page 30 of 33



ANALYTICAL REPORT

Apex Laboratories, LLC

6700 S.W. Sandburg Street

Tigard, OR 97223

503-718-2323

ORELAP ID: OR100062

Apex Companies, LLC - Portland

4412 S Corbett Ave

Portland, OR 97239

Project: Hillsboro School District

Project Number: RA Brown MS/26010605

Project Manager: Dale Voeller

Report ID:

A6I1374 - 09 22 26 1218

A6I1374

Lead in Drinking Water Testing Program

Hillsboro School District

Date Collected: 09/12/2026

School Name: RA Brown MS

	Fixture Number	Sample Number	Location / Description
57	057	22391700-057CF26A	Room R8 - classroom faucet
58	058	22391700-058BF26A	North Green Hall girls restroom sinks - left to right (1)
59	059	22391700-059BF26A	North Green Hall girls restroom sinks - left to right (2)
60	060	22391700-060BF26A	North Green Hall girls restroom sinks - left to right (3)
61	061		North Green Hall girls restroom sinks - left to right (4) - NOT WORKING
62	062	22391700-062BF26A	North Green Hall girls restroom sinks - left to right (5)
63	063	22391700-063WB26A	North Green Hall - water bottle filler
64	064	22391700-064DW26A	North Green Hall drinking fountain - left
65	065	22391700-065DW26A	North Green Hall drinking fountain - right
66	066	22391700-066BF26A	North Green Hall boys restroom sinks - left to right (1)
67	067	22391700-067BF26A	North Green Hall boys restroom sinks - left to right (2)
68	068	22391700-068BF26A	North Green Hall boys restroom sinks - left to right (3)
69	069	22391700-069BF26A	North Green Hall boys restroom sinks - left to right (4)
70	070	22391700-070BF26A	North Green Hall boys restroom sinks - left to right (5)
71	071	22391700-071DW26A	Room B2 - drinking fountain
72	072	22391700-072CF26A	Room B2 - classroom faucet
73	073	22391700-073DW26A	Room B4 - drinking fountain
74	074	22391700-074CF26A	Room B4 - classroom faucet
75	075	22391700-075DW26A	Room B1 - drinking fountain
76	076		Room B3 - drinking fountain - NOT WORKING
77	077	22391700-077DW26A	Room Y2 - drinking fountain (north wall)
78	078	Fixture Removed	Room Y2 - classroom faucet (west wall)
79	079	22391700-079DW26A	Room Y4 - drinking fountain
80	080	22391700-080DW26A	Room Y1 - drinking fountain
81	081	22391700-081CF26A	Room Y1 - classroom faucet
82	082	22391700-082DW26A	Room Y3 - drinking fountain
83	083	22391700-083CF26A	Room Y3 - classroom faucet
84	084	22391700-084DW26A	Room Y5 - drinking fountain
85	085	22391700-085CF26A	Room Y5 - classroom faucet
86	086	22391700-086DW26A	Room Y7 - drinking fountain
87	087	22391700-087CF26A	Room Y7 - classroom faucet



3 of 4

Apex Laboratories

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Jason Woodcock, Project Manager

Page 31 of 33



ANALYTICAL REPORT

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

Apex Companies, LLC - Portland

4412 S Corbett Ave
Portland, OR 97239

Project: Hillsboro School District

Project Number: RA Brown MS/26010605

Project Manager: Dale Voeller

Report ID:

A6I1374 - 09 22 26 1218

Lead in Drinking Water Testing Program

A6I1374

Hillsboro School District

Date Collected: 09/12/2026

School Name: RA Brown MS

	Fixture Number	Sample Number	Location / Description
88	088	22391700-088BF26A	Library Hall, girls staff restroom sink
89	089	22391700-089BF26A	Library Hall, girls restroom sinks - left to right (1)
90	090	22391700-090BF26A	Library Hall, girls restroom sinks - left to right (2)
91	091	22391700-091BF26A	Library Hall, girls restroom sinks - left to right (3)
92	092	22391700-092BF26A	Library Hall, girls restroom sinks - left to right (4)
93	093	22391700-093BF26A	Library Hall, boys staff restroom sink
94	094	22391700-094BF26A	Library Hall, boys restroom sinks - left to right (1)
95	095	22391700-095BF26A	Library Hall, boys restroom sinks - left to right (2)
96	096	22391700-096BF26A	Library Hall, boys restroom sinks - left to right (3)
97	097	22391700-097BF26A	Library Hall, boys restroom sinks - left to right (4)
98	098	22391700-098DW26A	Library Hall drinking fountain - left
99	099	22391700-099DW26A	Library Hall drinking fountain - right
100	100	22391700-100SF26A	New main office workroom sink
101	101	22391700-101NS26A	New Health Room sink
102	102	22391700-102BF26A	New Health Room restroom sink
103	103	22391700-103BF26A	Old health room restroom sink
104	104	22391700-104SF26A	Staff break room sink
105	105	22391700-105BF26A	Staff restroom near staff break room, - sink faucet
106	106	22391700-106BF26A	Staff restroom east of main entrance - sink faucet
107	107	22391700-107SF26A	Conference room - sink faucet

Relinquished By/Signature

Jan Johnson

Date/Time:

9/14/26 9:44am

Received By/Signature:

[Signature]

Date/Time:

9/14/26 11:45



4 of 4

Apex Laboratories

[Signature]

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.



ANALYTICAL REPORT

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

Apex Companies, LLC - Portland

4412 S Corbett Ave
Portland, OR 97239

Project: Hillsboro School District

Project Number: RA Brown MS/26010605

Project Manager: Dale Voeller

Report ID:

A6I1374 - 09 22 26 1218

APEX LABS COOLER RECEIPT FORM

Client: Apex Companies Element WO#: A6I1374Project/Project #: Lead in Drinking Water Testing Program / 26010605 / 9
DATE RA Brown MS 0008

Delivery Info:

Date/time received: 9/14/26 @ 1149 By: JBEDelivered by: Apex ☒ Client ☐ ESS ☐ FedEx ☐ UPS ☐ Radio ☐ Morgan ☐ SDS ☐ Evergreen ☐ Other ☐From USDA Regulated Origin? Yes ☐ No ☒Cooler Inspection Date/time inspected: 9/14/26 @ 1215 By: JBEChain of Custody included? Yes ☒ No ☐Signed/dated by client? Yes ☒ No ☐Contains USDA Reg. Soils? Yes ☐ No ☒ Unsure (email RegSoils) ☐

	Cooler #1	Cooler #2	Cooler #3	Cooler #4	Cooler #5	Cooler #6	Cooler #7
Temperature (°C)	<u>21.1</u>	<u>21.8</u>					
Custody seals? (Y/N)	<u>N</u>	<u>N</u>					
Received on ice? (Y/N)	<u>N</u>	<u>N</u>					
Temp. blanks? (Y/N)	<u>N</u>	<u>N</u>					
Ice type: (Gel/Real/Other)	<u>None</u>	<u>None</u>					
Condition (In/Out)	<u>out</u>	<u>out</u>					

Cooler out of temp? (Y/N) Possible reason why: 9/14/26Green dots applied to out of temperature samples? Yes ☒ No ☐Out of temperature samples form initiated? Yes ☒ No ☐Sample Inspection: Date/time inspected: 9/14/26 @ 13:34 By: KAMAll samples intact? Yes ☒ No ☐ Comments: Bottle labels/COCs agree? Yes ☒ No ☐ Comments: COC/container discrepancies form initiated? Yes ☐ No ☒Containers/volumes received appropriate for analysis? Yes ☒ No ☐ Comments: Do VOA vials have visible headspace? Yes ☐ No ☐ NA ☒Comments: Water samples: pH checked: Yes ☒ No ☐ NA ☐ pH appropriate? Yes ☒ No ☐ NA ☐ pH ID: A256211Comments: Labeled by: KAMWitness: MCooler Inspected by: KAM

Form Y-003 R-02

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.



ANALYTICAL REPORT

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223

503-718-2323

ORELAP ID: OR100062

Wednesday, October 7, 2026

Dale Voeller

Apex Companies, LLC - Portland

4412 S Corbett Ave

Portland, OR 97239

RE: A6J1190 - Hillsboro School District - RA Brown MS/26010605

Thank you for using Apex Laboratories. We greatly appreciate your business and strive to provide the highest quality services to the environmental industry.

Enclosed are the results of analyses for work order A6J1190, which was received by the laboratory on 10/5/2026 at 10:50:00AM.

If you have any questions concerning this report or the services we offer, please feel free to contact me by email at: jwoodcock@apex-labs.com, or by phone at 503-718-2323.

Please note: All samples will be disposed of within 30 days of sample receipt, unless prior arrangements have been made.

Cooler Receipt Information

Acceptable Receipt Temperature is less than, or equal to, 6 degC (not frozen), or received on ice the same day as sampling.

(See Cooler Receipt Form for details)

Default Cooler 22.8 degC

This Final Report is the official version of the data results for this sample submission, unless superseded by a subsequent, labeled amended report.

All other deliverables derived from this data, including Electronic Data Deliverables (EDDs), CLP-like forms, client requested summary sheets, and all other products are considered secondary to this report.



Apex Laboratories

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Jason Woodcock, Project Manager

**ANALYTICAL REPORT****Apex Laboratories, LLC**6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323

ORELAP ID: OR100062

Apex Companies, LLC - Portland4412 S Corbett Ave
Portland, OR 97239Project: **Hillsboro School District**Project Number: **RA Brown MS/26010605**Project Manager: **Dale Voeller****Report ID:****A6J1190 - 10 07 26 1650****ANALYTICAL REPORT FOR SAMPLES****SAMPLE INFORMATION**

Client Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
22391700-001DW26A	A6J1190-01	Drinking Water	10/03/26 00:00	10/05/26 10:50
22391700-035CF26A	A6J1190-02	Drinking Water	10/03/26 00:00	10/05/26 10:50
22391700-061BF26A	A6J1190-03	Drinking Water	10/03/26 00:00	10/05/26 10:50

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.



ANALYTICAL REPORT

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

Apex Companies, LLC - Portland

4412 S Corbett Ave
Portland, OR 97239

Project: **Hillsboro School District**

Project Number: **RA Brown MS/26010605**

Project Manager: **Dale Voeller**

Report ID:

A6J1190 - 10 07 26 1650

ANALYTICAL SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Sample Result	Detection Limit	Reporting Limit	Units	Dilution	Date Analyzed	Method Ref.	Notes
22391700-001DW26A (A6J1190-01)				Matrix: Drinking Water				
Batch: 26J0129								
Lead	0.455	---	0.200	ug/L	1	10/06/26 14:48	EPA 200.8	
22391700-035CF26A (A6J1190-02)				Matrix: Drinking Water				
Batch: 26J0129								
Lead	0.225	---	0.200	ug/L	1	10/06/26 14:50	EPA 200.8	
22391700-061BF26A (A6J1190-03)				Matrix: Drinking Water				
Batch: 26J0129								
Lead	ND	---	0.200	ug/L	1	10/06/26 14:58	EPA 200.8	

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.



ANALYTICAL REPORT

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

Apex Companies, LLC - Portland

4412 S Corbett Ave
Portland, OR 97239

Project: Hillsboro School District

Project Number: RA Brown MS/26010605

Project Manager: Dale Voeller

Report ID:

A6J1190 - 10 07 26 1650

QUALITY CONTROL (QC) SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Result	Detection Limit	Reporting Limit	Units	Dilution	Spike Amount	Source Result	% REC	% REC Limits	RPD	RPD Limit	Notes
Batch 26J0129 - EPA 200.8 Direct Analysis							Drinking Water					
Blank (26J0129-BLK1)		Prepared: 10/05/26 14:19 Analyzed: 10/06/26 13:56										
EPA 200.8												
Lead	ND	---	0.200	ug/L	1	---	---	---	---	---	---	
LCS (26J0129-BS1)		Prepared: 10/05/26 14:19 Analyzed: 10/06/26 13:58										
EPA 200.8												
Lead	15.6	---	0.201	ug/L	1	15.0	---	104	85 - 115%	---	---	

No Client related Batch QC samples analyzed for this batch. See notes page for more information.

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.



ANALYTICAL REPORT

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323

ORELAP ID: OR100062

Apex Companies, LLC - Portland

4412 S Corbett Ave
Portland, OR 97239

Project: **Hillsboro School District**

Project Number: **RA Brown MS/26010605**

Project Manager: **Dale Voeller**

Report ID:

A6J1190 - 10 07 26 1650

SAMPLE PREPARATION INFORMATION

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Prep: EPA 200.8 Direct Analysis

Lab Number	Matrix	Method	Sampled	Prepared	Sample Initial/Final	Default Initial/Final	RL Prep Factor
Batch: 26J0129							
A6J1190-01	Drinking Water	EPA 200.8	10/03/26 00:00	10/05/26 14:19	10mL/10mL	10mL/10mL	1.00
A6J1190-02	Drinking Water	EPA 200.8	10/03/26 00:00	10/05/26 14:19	10mL/10mL	10mL/10mL	1.00
A6J1190-03	Drinking Water	EPA 200.8	10/03/26 00:00	10/05/26 14:19	10mL/10mL	10mL/10mL	1.00

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.



ANALYTICAL REPORT

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323

ORELAP ID: OR100062

Apex Companies, LLC - Portland

4412 S Corbett Ave
Portland, OR 97239

Project: Hillsboro School District

Project Number: RA Brown MS/26010605

Project Manager: Dale Voeller

Report ID:

A6J1190 - 10 07 26 1650

QUALIFIER DEFINITIONS

Client Sample and Quality Control (QC) Sample Qualifier Definitions:

There are No Qualifiers on Sample or QC Data for this report

Apex Laboratories

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Jason Woodcock, Project Manager



ANALYTICAL REPORT

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

Apex Companies, LLC - Portland

4412 S Corbett Ave
Portland, OR 97239

Project: **Hillsboro School District**

Project Number: **RA Brown MS/26010605**

Project Manager: **Dale Voeller**

Report ID:

A6J1190 - 10 07 26 1650

REPORTING NOTES AND CONVENTIONS:

Abbreviations:

DET Analyte DETECTED at or above the detection or reporting limit.
ND Analyte NOT DETECTED at or above the detection or reporting limit.
NR Result Not Reported.
RPD Relative Percent Difference. RPDs for Matrix Spikes and Matrix Spike Duplicates are based on concentration, not recovery.

Detection Limits: Limit of Detection (LOD)

Limits of Detection (LODs) are normally set at a level of one half the validated Limit of Quantitation (LOQ).
If no value is listed ('-----'), then the data has not been evaluated below the Reporting Limit.

Reporting Limits: Limit of Quantitation (LOQ)

Validated Limits of Quantitation (LOQs) are reported as the Reporting Limits for all analyses where the LOQ, MRL, PQL or CRL are requested. The LOQ represents a level at or above the low point of the calibration curve, that has been validated according to Apex Laboratories' comprehensive LOQ policies and procedures.

Reporting and Detection Limits: Default Limits

Default Reporting and Detection Limits are based on 100% dry weight with the minimum dilution for the analysis. Reporting and Detection Limits are raised due to moisture content, additional dilutions required for analysis, matrix interferences and in other cases, as necessary.

Reporting Conventions:

Basis: Results for soil samples are generally reported on a 100% dry weight basis.

Results where dry weight correction has not been applied do not have the "dry" designation appended to the units, and results are reported on an "as received" basis.

Results for Volatiles analyses on soils and sediments that are reported on a "dry weight" basis include the water miscible solvent (WMS) correction referenced in the EPA 8000 Method guidance documents. Solid and Liquid samples reported on an "As Received" basis do not have the WMS correction applied, as dry weight was not performed.

QC Source:

In cases where there is insufficient sample provided for Sample Duplicates and/or Matrix Spikes, a Lab Control Sample Duplicate (LCS Dup) may be analyzed to demonstrate accuracy and precision of the extraction batch.

Non-Client Batch QC Samples (Duplicates and Matrix Spike/Duplicates) are not included in this report. Please request a Full QC report if this data is required.

Miscellaneous Notes:

" --- " QC results are not applicable. For example, % Recoveries for Blanks and Duplicates, % RPD for Blanks, Blank Spikes and Matrix Spikes, etc.

" *** " Used to indicate a possible discrepancy with the Sample and Sample Duplicate results when the %RPD is not available. In this case, either the Sample or the Sample Duplicate has a reportable result for this analyte, while the other is Non Detect (ND).

Apex Laboratories

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Jason Woodcock, Project Manager



ANALYTICAL REPORT

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

Apex Companies, LLC - Portland

4412 S Corbett Ave
Portland, OR 97239

Project: Hillsboro School District

Project Number: RA Brown MS/26010605

Project Manager: Dale Voeller

Report ID:

A6J1190 - 10 07 26 1650

REPORTING NOTES AND CONVENTIONS (Cont.):

Blanks:

Standard practice is to evaluate the results from Blank QC Samples down to a level equal to one half of the Reporting Limit (RL).

Blank results for gravimetric analyses are evaluated to the Reporting Level, not to half of the Reporting Level.

-For Blank hits falling between $\frac{1}{2}$ the RL and the RL (J flagged hits), the associated sample and QC data will receive a 'B-02' qualifier.

-For Blank hits above the RL, the associated sample and QC data will receive a 'B' qualifier, per Apex Laboratories' Blank Policy.

For further details, please request a copy of this document.

Sample results flagged with a 'B' or 'B-02' qualifier are potentially biased high if the sample results are less than ten times the level found in the blank for inorganic analyses, or less than five times the level found in the blank for organic analyses.

'B' and 'B-02' qualifications are only applied to sample results detected above the Reporting Level.

Preparation Notes:

Mixed Matrix Samples:

Water Samples:

Water samples containing significant amounts of sediment are decanted or separated prior to extraction, and only the water portion analyzed, unless otherwise directed by the client.

Soil and Sediment Samples:

Soil and Sediment samples containing significant amounts of water are decanted prior to extraction, and only the solid portion analyzed, unless otherwise directed by the client.

Sampling and Preservation Notes:

Certain regulatory programs, such as National Pollutant Discharge Elimination System (NPDES), require that activities such as sample filtration (for dissolved metals, orthophosphate, hexavalent chromium, etc.) and testing of short hold analytes (pH, Dissolved Oxygen, etc.) be performed in the field (on-site) within a short time window. In addition, sample matrix spikes are required for some analyses, and sufficient volume must be provided, and billable site specific QC requested, if this is required. All regulatory permits should be reviewed to ensure that these requirements are being met.

Data users should be aware of which regulations pertain to the samples they submit for testing. If related sample collection activities are not approved for a particular regulatory program, results should be considered estimates. Apex Laboratories will qualify these analytes according to the most stringent requirements, however results for samples that are for non-regulatory purposes may be acceptable.

Benzofluoranthene Isomer Reporting:

Due to coelutions present on the analytical column, the results reported for Benzo(b+j)fluoranthene(s) represent the concentration of both the Benzo(b)fluoranthene and Benzo(j)fluoranthene isomers. Calibration, validation and accreditation are based on the Benzo(b)fluoranthene isomer.

Apex Laboratories

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Jason Woodcock, Project Manager



ANALYTICAL REPORT

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

Apex Companies, LLC - Portland

4412 S Corbett Ave
Portland, OR 97239

Project: **Hillsboro School District**

Project Number: **RA Brown MS/26010605**

Project Manager: **Dale Voeller**

Report ID:

A6J1190 - 10 07 26 1650

Decanted Samples:

Soils/Sediments:

Unless TCLP analysis is required or there is notification otherwise for a specific project, all Soil and Sediments containing excess water are decanted prior to analysis in order to provide the most representative sample for analysis.

Water Samples:

Water samples containing solids and sediment may need to be decanted in order to eliminate these particulates from the water extractions. In the case of organics extractions, a solvent rinse of the container will not be performed.

Volatiles Soils (5035s)

Samples that are field preserved by 5035 for volatiles are dry weight corrected using the same dry weight correction as for normal analyses.

In the case of decanted samples, the dry weight may be performed on a decanted sample, while the aliquot for 5035 may not have been treated the same way. If this is a concern, please submit separate containers for dry weight analysis for volatiles can be provided.

All samples decanted in the laboratory are noted in this report with the DCNT qualifier indicating the sample was decanted.

Apex Laboratories

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Jason Woodcock, Project Manager



ANALYTICAL REPORT

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

Apex Companies, LLC - Portland

4412 S Corbett Ave
Portland, OR 97239

Project: **Hillsboro School District**

Project Number: **RA Brown MS/26010605**

Project Manager: **Dale Voeller**

Report ID:

A6J1190 - 10 07 26 1650

LABORATORY ACCREDITATION INFORMATION

ORELAP Certification ID: OR100062 (Primary Accreditation)

EPA ID: OR01039

All methods and analytes reported from work performed at Apex Laboratories are included on Apex Laboratories' ORELAP Scope of Certification, with the exception of any analyte(s) listed below:

Apex Laboratories

Matrix	Analysis	Analyte	TNI_ID	Accreditation
--------	----------	---------	--------	---------------

All reported analytes are included in Apex Laboratories' current ORELAP scope.

Secondary Accreditations

Apex Laboratories also maintains reciprocal accreditation with non-TNI states (Washington DOE), as well as other state specific accreditations not listed here.

Subcontract Laboratory Accreditations

Subcontracted data falls outside of Apex Laboratories' Scope of Accreditation.

Please see the Subcontract Laboratory report for full details, or contact your Project Manager for more information.

Field Testing Parameters

Results for Field Tested data are provided by the client or sampler, and fall outside of Apex Laboratories' Scope of Accreditation.

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.



ANALYTICAL REPORT

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

Apex Companies, LLC - Portland

4412 S Corbett Ave
Portland, OR 97239

Project: Hillsboro School District

Project Number: RA Brown MS/26010605

Project Manager: Dale Voeller

Report ID:

A6J1190 - 10 07 26 1650

Lead in Drinking Water Testing Program

Date Collected: 10/03/2026

PBS Project: A6J1190 26010605 / 0009

School Name: RA Brown MS

Building: Main Building - Round 2

Building Number: 22391700

Analysis Requested: Lead (Pb) in Drinking Water

Email Results To: dale.voeller@apexcsl.com

Turnaround Time: RUSH

	Fixture Number	Sample Number	Location / Description
1	001	22391700-001DW26A	Main entrance drinking fountain - left
2	035	22391700-035CF26A	Room G3, classroom faucet
3	061	22391700-061BF26A	North Green Hall girls restroom sinks - left to right (4)
4			
5			
6			
7			
8			
9			
10			
11			
12			
13			
14			
15			
16			
17			
18			
19			
20			

Relinquished By/Signature Dale Voeller

Date/Time: 10/3/26 11:47 AM

Received By/Signature [Signature]

Date/Time: 10/5/26 10:50

1 of 1

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.



ANALYTICAL REPORT

Apex Laboratories, LLC

6700 S.W. Sandburg Street

Tigard, OR 97223

503-718-2323

ORELAP ID: OR100062

Apex Companies, LLC - Portland

4412 S Corbett Ave

Portland, OR 97239

Project: Hillsboro School District

Project Number: RA Brown MS/26010605

Project Manager: Dale Voeller

Report ID:

A6J1190 - 10 07 26 1650

APEX LABS COOLER RECEIPT FORM

Client: Apex Co Element WO#: A6 J1190Project/Project #: RA Brown MS/26010605/0009

Delivery Info:

Date/time received: 10/5/26 @ 10:50 By: AJMDelivered by: Apex ☒ Client ☐ ESS ☐ FedEx ☐ UPS ☐ Radio ☐ Morgan ☐ SDS ☐ Evergreen ☐ Other ☐From USDA Regulated Origin? Yes ☐ No ☒Cooler Inspection Date/time inspected: 10/5/26 @ 12:20 By: AJMChain of Custody included? Yes ☒ No ☐Signed/dated by client? Yes ☒ No ☐Contains USDA Reg. Soils? Yes ☐ No ☒ Unsure (email RegSoils) ☐

	Cooler #1	Cooler #2	Cooler #3	Cooler #4	Cooler #5	Cooler #6	Cooler #7
Temperature (°C)	<u>22.8</u>						
Custody seals? (Y/N)	<u>N</u>						
Received on ice? (Y/N)	<u>N</u>						
Temp. blanks? (Y/N)	<u>N</u>						
Ice type: (Gel/Real/Other)	<u>None</u>						
Condition (In/Out)	<u>Out</u>						

Cooler out of temp? (Y/N) Possible reason why: Lead Testing / Metals TestingGreen dots applied to out of temperature samples? Yes ☒ No ☐Out of temperature samples form initiated? Yes ☒ No ☐Sample Inspection: Date/time inspected: 10/5/26 @ 1242 By: AAWAll samples intact? Yes ☒ No ☐ Comments: _____Bottle labels/COCs agree? Yes ☒ No ☐ Comments: _____COC/container discrepancies form initiated? Yes ☐ No ☒Containers/volumes received appropriate for analysis? Yes ☒ No ☐ Comments: _____Do VOA vials have visible headspace? Yes ☐ No ☐ NA ☒

Comments: _____

Water samples: pH checked: Yes ☒ No ☐ NA ☐ pH appropriate? Yes ☒ No ☐ NA ☐ pH ID: AN56271

Comments: _____

Labeled by: AAWWitness: VSCooler Inspected by: AAW

Form Y-003 R-02

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.