October 26, 2026

Will Wenzloff
Hillsboro School District
4901 SE Witch Hazel Road
Hillsboro, Oregon 97123

Via email: wenzlofw@hsd.k12.or.us

Regarding: Drinking Water Sampling Report
Groner Elementary School
23405 SW Scholls Ferry Road
Hillsboro, Oregon
Apex Project No. 26010605 / 0003

Dear Mr. Wenzloff:

On September 26, 2026, Apex Companies LLC (Apex) collected drinking water samples at Groner Elementary School in Hillsboro, Oregon. The testing was requested by Hillsboro School District as part of their efforts to ensure that concentrations of lead in drinking water at the school remain below the Oregon Department of Education (ODE) action level of 10 parts per billion (ppb).

The drinking fountain in the east wing hallway at the girls restroom, fixture 015 has been replaced with a new water bottle filler and drinking fountain. That fixture number has been retired and the new fixtures have been assigned numbers 052 and 053. The drinking fountain in the north exit hall in the east wing, fixture 016, has been turned off at the request of staff. This fixture will be tested if it is ever returned to service.

Water from all fixtures in the school used for drinking or food preparation have lead concentrations below 10 ppb.

Fifty-six samples were collected and delivered under chain of custody to Apex Laboratories in Tigard, Oregon, for lead analysis. The results of the sampling is shown in the table below.

Fixture Number	Sample Number	Location / Room No.	Results (ppb)
001	22391400-001NS26A	Health Room Sink	1.65
002	22391400-002DW26A	Gym Hall Drinking Fountain - Left	ND
003	22391400-003WB26A	Gym Hall Water Bottle Filler	ND
004	22391400-004DW26A	Gym Hall Drinking Fountain - Right	ND
005	22391400-005BF26A	Gym Hall Girls RR Sink - Left	0.600
006	22391400-006BF26A	East Wing ADA RR Sink	0.213
007	22391400-007BF26A	East Wing South Boys RR Sink - Left	2.39
008	22391400-008BF26A	East Wing South Boys RR Sink - Right	1.23

Fixture Number	Sample Number	Location / Room No.	Results (ppb)
009	22391400-009CF26A	Room 1 Classroom Faucet	2.46
010	22391400-010DW26A	Hall Drinking Fountain Between Rooms 1 & 3	3.05
011	22391400-011CF26A	Room 3 Classroom Faucet	0.723
012	22391400-012CF26A	Room 5 Classroom Faucet	0.813
013	22391400-013BF26A	East Wing Girls North RR Sink - Left	0.387
014	22391400-014BF26A	East Wing Girls North RR Sink - Right	0.470
015	- Fixture Replaced -	East Wing Hall Drinking Fountain at Girls North RR (West Side)	
016		East Wing North Hall Drinking Fountain – OFF BY REQUEST	
017	22391400-017CF26A	Room 9 Classroom Faucet	0.444
018	22391400-018CF26A	Room 8 Classroom Faucet	0.781
019	22391400-019CF26A	Room 6 Classroom Faucet	0.783
020	22391400-020DW26A	East Wing Hall Drinking Fountain at Boys North RR (East Side)	0.841
021	22391400-021BF26A	East Wing Boys North RR Sink - Left	0.567
022	22391400-022BF26A	East Wing Boys North RR Sink - Right	0.544
023	22391400-023CF26A	Room 4 Classroom Faucet	1.14
024	22391400-024DW26A	Room 2 Drinking Fountain	3.78
025	22391400-025CF26A	Room 2 Classroom Faucet	2.40
026	22391400-026CF26A	Library Classroom Faucet	3.30
027	22391400-027KF26A	Kitchen, Single Prep Sink at South Wall	0.259
028	22391400-028KF26A	Kitchen, Double Prep Sink at North Wall	ND
029	22391400-029KF26A	Kitchen, Pot Filler Faucet	1.32
030	22391400-030KF26A	Kitchen, Hand Wash Sink at Scullery	1.97
031	22391400-031KF26A	Kitchen, Small Prep Sink in Scullery	0.454
032	22391400-032SF26A	Faculty Break Room Sink	1.51
033	22391400-033BF26A	West Wing Faculty RR Sink	1.04
034	22391400-034DW26A	Room 10 Drinking Fountain	2.78
035	22391400-035CF26A	Room 10 Classroom Faucet	0.791
036	22391400-036DW26A	Room 12 Drinking Fountain	3.35
037	22391400-037CF26A	Room 12 Classroom Faucet	1.17
038	22391400-038DW26A	Room 14 Drinking Fountain	2.06
039	22391400-039CF26A	Room 14 Classroom Faucet	0.807
040	22391400-040DW26A	Room 16 Drinking Fountain	1.25
041	22391400-041CF26A	Room 16 Classroom Faucet	0.592
042	22391400-042DW26A	Room 15 Drinking Fountain	2.04
043	22391400-043CF26A	Room 15 Classroom Faucet	0.736
044	22391400-044DW26A	Room 13 Drinking Fountain	3.19
045	22391400-045CF26A	Room 13 Classroom Faucet	0.473
046	22391400-046BF26A	West Wing Girls RR Sink - Left	2.06
047	22391400-047BF26A	West Wing Girls RR Sink - Right	1.85
048	22391400-048BF26A	West Wing Boys RR Sink - Left	1.31
049	22391400-049BF26A	West Wing Boys RR Sink - Right	3.15

Fixture Number	Sample Number	Location / Room No.	Results (ppb)
050	22391400-050WC26A	Health Room – Water Chiller	ND
051	22391400-051BF26A	Gym Hall Girls RR Sink – Right	1.11
052	22391400-052DW26A	East Wing Hall at Girls North RR (West Side) - Drinking Fountain	ND
053	22391400-053WB26A	East Wing Hall at Girls North RR (West Side) – Bottle Filler	ND
054	22391400-054CF26A	Room 7 Classroom Faucet	0.914
055	22391400-055KF26A	Kitchen, Sink at dishwashing station in Scullery	0.210
056	22391400-056WC26A	Faculty Break Room – Water Chiller	ND
057	22391400-057WB26A	West Wing Hall by Room 16 – Bottle Filler	ND
058	22391400-058DW26A	West Wing Hall by Room 16 – Drinking Fountain	ND

ND = no lead detected

Please refer to the attached fixture location drawings and laboratory analytical report for additional details.

The laboratory analytical results are reported in micrograms per liter (µg/L), a unit of measure that is equivalent to ppb.

Sampling methodology and the interpretation of laboratory results were based on the Environmental Protection Agency guidance document titled *3Ts for Reducing Lead in Drinking Water in Schools*. Following this guideline, Apex collected first draw samples from each test location. First draw samples consist of the first 250 milliliters (mL) of water drawn from a fixture after the water has been sitting stagnant for at least 8 hours. The 3Ts' sampling protocol specifying 250-mL samples is designed to maximize the likelihood that the highest concentrations of lead in water used for consumption are identified.

Please feel free to contact me at 503.515.4726 or dale.voeller@apexcos.com with any questions or comments.

Sincerely,


Dale Voeller, CSP
Senior Project Manager

Attachment: Fixture Location Drawings
Laboratory Analytical Reports

182

GRONER ELEMENTARY SCHOOL
SCHOOL BUILDING
MAIN LEVEL BUILDING PLAN


Fixture Location Drawing
October 2026
1 of 2

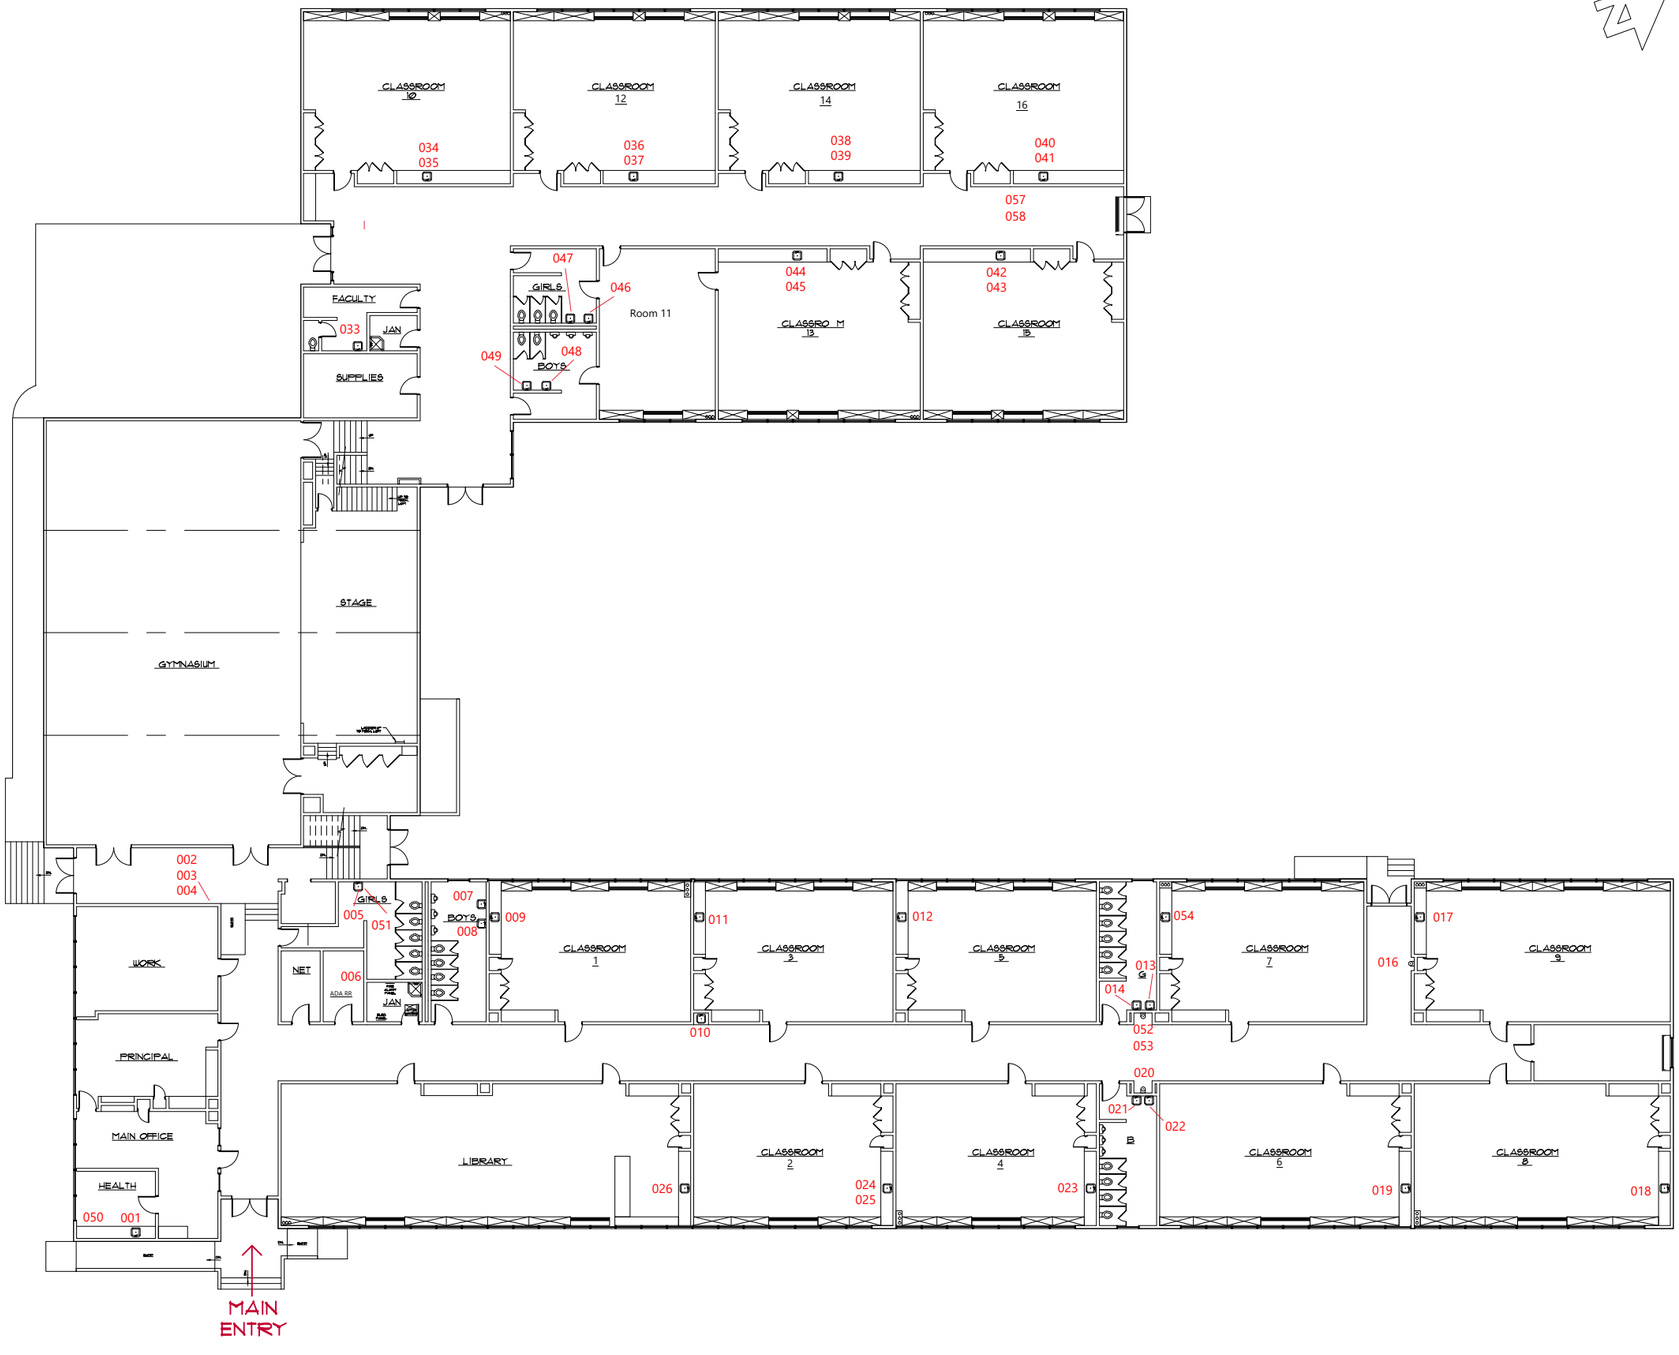

182

GRONER ELEMENTARY SCHOOL
SCHOOL BUILDING
BASEMENT LEVEL PLAN

Fixture Location Drawing
October 2026

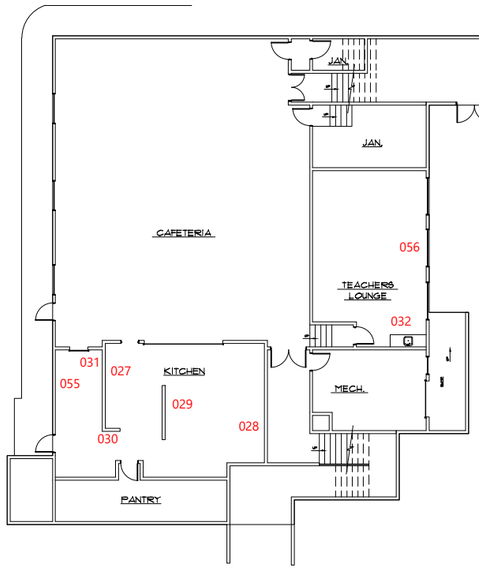

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Monday, October 19, 2026

Dale Voeller
Apex Companies, LLC - Portland
4412 S Corbett Ave
Portland, OR 97239

RE: A6J1131 - Hillsboro School District - Groner Elementary School / 2610605

Thank you for using Apex Laboratories. We greatly appreciate your business and strive to provide the highest quality services to the environmental industry.

Enclosed are the results of analyses for work order A6J1131, which was received by the laboratory on 9/29/2026 at 11:22:00AM.

If you have any questions concerning this report or the services we offer, please feel free to contact me by email at: jwoodcock@apex-labs.com, or by phone at 503-718-2323.

Please note: All samples will be disposed of within 30 days of sample receipt, unless prior arrangements have been made.

Cooler Receipt Information
Acceptable Receipt Temperature is less than, or equal to, 6 degC (not frozen), or received on ice the same day as sampling.
(See Cooler Receipt Form for details)
Default Cooler 21.4 degC

This Final Report is the official version of the data results for this sample submission, unless superseded by a subsequent, labeled amended report.
All other deliverables derived from this data, including Electronic Data Deliverables (EDDs), CLP-like forms, client requested summary sheets, and all other products are considered secondary to this report.

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

ANALYTICAL REPORT


Apex Companies, LLC - Portland	Project: Hillsboro School District	
4412 S Corbett Ave	Project Number: Groner Elementary School /	Report ID:
Portland, OR 97239	Project Manager: Dale Voeller	A6J1131 - 10 19 26 1019

ANALYTICAL REPORT FOR SAMPLES

SAMPLE INFORMATION

Client Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
22391400-001NS26A	A6J1131-01	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-002DW26A	A6J1131-02	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-003WB26A	A6J1131-03	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-004DW26A	A6J1131-04	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-005BF26A	A6J1131-05	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-006BF26A	A6J1131-06	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-007BF26A	A6J1131-07	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-008BF26A	A6J1131-08	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-009CF26A	A6J1131-09	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-010DW26A	A6J1131-10	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-011CF26A	A6J1131-11	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-012CF26A	A6J1131-12	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-013BF26A	A6J1131-13	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-014BF26A	A6J1131-14	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-017CF26A	A6J1131-15	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-018CF26A	A6J1131-16	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-019CF26A	A6J1131-17	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-020DW26A	A6J1131-18	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-021BF26A	A6J1131-19	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-022BF26A	A6J1131-20	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-023CF26A	A6J1131-21	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-024DW26A	A6J1131-22	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-025CF26A	A6J1131-23	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-026CF26A	A6J1131-24	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-027KF26A	A6J1131-25	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-028KF26A	A6J1131-26	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-029KF26A	A6J1131-27	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-030KF26A	A6J1131-28	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-031KF26A	A6J1131-29	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-032SF26A	A6J1131-30	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-033BF26A	A6J1131-31	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-034DW26A	A6J1131-32	Drinking Water	09/26/26 00:00	09/29/26 11:22

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

ANALYTICAL REPORT


Apex Companies, LLC - Portland	Project: Hillsboro School District	
4412 S Corbett Ave	Project Number: Groner Elementary School /	Report ID:
Portland, OR 97239	Project Manager: Dale Voeller	A6J1131 - 10 19 26 1019

ANALYTICAL REPORT FOR SAMPLES

SAMPLE INFORMATION

Client Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
22391400-035CF26A	A6J1131-33	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-036DW26A	A6J1131-34	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-037CF26A	A6J1131-35	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-038DW26A	A6J1131-36	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-039CF26A	A6J1131-37	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-040DW26A	A6J1131-38	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-041CF26A	A6J1131-39	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-042DW26A	A6J1131-40	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-043CF26A	A6J1131-41	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-044DW26A	A6J1131-42	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-045CF26A	A6J1131-43	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-046BF26A	A6J1131-44	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-047BF26A	A6J1131-45	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-048BF26A	A6J1131-46	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-049BF26A	A6J1131-47	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-050WC26A	A6J1131-48	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-051BF26A	A6J1131-49	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-052DW26A	A6J1131-50	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-053WB26A	A6J1131-51	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-054CF26A	A6J1131-52	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-055KF26A	A6J1131-53	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-056WC26A	A6J1131-54	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-057WB26A	A6J1131-55	Drinking Water	09/26/26 00:00	09/29/26 11:22
22391400-058DW26A	A6J1131-56	Drinking Water	09/26/26 00:00	09/29/26 11:22

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

ANALYTICAL REPORT


Apex Companies, LLC - Portland	Project: Hillsboro School District	
4412 S Corbett Ave	Project Number: Groner Elementary School /	Report ID:
Portland, OR 97239	Project Manager: Dale Voeller	A6J1131 - 10 19 26 1019

ANALYTICAL SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Sample Result	Detection Limit	Reporting Limit	Units	Dilution	Date Analyzed	Method Ref.	Notes
22391400-001NS26A (A6J1131-01)				**Matrix: Drinking Water**				
Batch: 26J0445								
Lead	**1.65**	---	0.200	ug/L	1	10/15/26 21:03	EPA 200.8	
22391400-002DW26A (A6J1131-02)				**Matrix: Drinking Water**				
Batch: 26J0445								
Lead	ND	---	0.200	ug/L	1	10/15/26 21:05	EPA 200.8	
22391400-003WB26A (A6J1131-03)				**Matrix: Drinking Water**				
Batch: 26J0445								
Lead	ND	---	0.200	ug/L	1	10/15/26 21:08	EPA 200.8	
22391400-004DW26A (A6J1131-04)				**Matrix: Drinking Water**				
Batch: 26J0445								
Lead	ND	---	0.200	ug/L	1	10/15/26 21:11	EPA 200.8	
22391400-005BF26A (A6J1131-05)				**Matrix: Drinking Water**				
Batch: 26J0445								
Lead	**0.600**	---	0.200	ug/L	1	10/15/26 21:13	EPA 200.8	
22391400-006BF26A (A6J1131-06)				**Matrix: Drinking Water**				
Batch: 26J0445								
Lead	**0.213**	---	0.200	ug/L	1	10/15/26 21:16	EPA 200.8	
22391400-007BF26A (A6J1131-07)				**Matrix: Drinking Water**				
Batch: 26J0445								
Lead	**2.39**	---	0.200	ug/L	1	10/15/26 21:18	EPA 200.8	
22391400-008BF26A (A6J1131-08)				**Matrix: Drinking Water**				
Batch: 26J0445								
Lead	**1.23**	---	0.200	ug/L	1	10/15/26 21:21	EPA 200.8	
22391400-009CF26A (A6J1131-09)				**Matrix: Drinking Water**				
Batch: 26J0445								
Lead	**2.46**	---	0.200	ug/L	1	10/15/26 21:24	EPA 200.8	

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

APEX LABORATORIES

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT


Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Groner Elementary School /**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6J1131 - 10 19 26 1019**

ANALYTICAL SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Sample Result	Detection Limit	Reporting Limit	Units	Dilution	Date Analyzed	Method Ref.	Notes
22391400-010DW26A (A6J1131-10)				**Matrix: Drinking Water**				
Batch: 26J0445								
Lead	**3.05**	---	0.200	ug/L	1	10/15/26 21:32	EPA 200.8	
22391400-011CF26A (A6J1131-11)				**Matrix: Drinking Water**				
Batch: 26J0458								
Lead	**0.723**	---	0.200	ug/L	1	10/15/26 21:42	EPA 200.8	
22391400-012CF26A (A6J1131-12)				**Matrix: Drinking Water**				
Batch: 26J0458								
Lead	**0.813**	---	0.200	ug/L	1	10/15/26 21:50	EPA 200.8	
22391400-013BF26A (A6J1131-13)				**Matrix: Drinking Water**				
Batch: 26J0458								
Lead	**0.387**	---	0.200	ug/L	1	10/15/26 21:52	EPA 200.8	
22391400-014BF26A (A6J1131-14)				**Matrix: Drinking Water**				
Batch: 26J0458								
Lead	**0.470**	---	0.200	ug/L	1	10/15/26 21:55	EPA 200.8	
22391400-017CF26A (A6J1131-15)				**Matrix: Drinking Water**				
Batch: 26J0458								
Lead	**0.444**	---	0.200	ug/L	1	10/15/26 22:03	EPA 200.8	
22391400-018CF26A (A6J1131-16)				**Matrix: Drinking Water**				
Batch: 26J0458								
Lead	**0.781**	---	0.200	ug/L	1	10/15/26 22:05	EPA 200.8	
22391400-019CF26A (A6J1131-17)				**Matrix: Drinking Water**				
Batch: 26J0458								
Lead	**0.783**	---	0.200	ug/L	1	10/15/26 22:08	EPA 200.8	
22391400-020DW26A (A6J1131-18)				**Matrix: Drinking Water**				
Batch: 26J0458								
Lead	**0.841**	---	0.200	ug/L	1	10/15/26 22:11	EPA 200.8	

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

APEX LABORATORIES

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT


Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Groner Elementary School /**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6J1131 - 10 19 26 1019**

ANALYTICAL SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Sample Result	Detection Limit	Reporting Limit	Units	Dilution	Date Analyzed	Method Ref.	Notes
22391400-021BF26A (A6J1131-19)				**Matrix: Drinking Water**				
Batch: 26J0458								
Lead	**0.567**	---	0.200	ug/L	1	10/15/26 22:13	EPA 200.8	
22391400-022BF26A (A6J1131-20)				**Matrix: Drinking Water**				
Batch: 26J0458								
Lead	**0.544**	---	0.200	ug/L	1	10/15/26 22:16	EPA 200.8	
22391400-023CF26A (A6J1131-21)				**Matrix: Drinking Water**				
Batch: 26J0458								
Lead	**1.14**	---	0.200	ug/L	1	10/15/26 22:18	EPA 200.8	
22391400-024DW26A (A6J1131-22)				**Matrix: Drinking Water**				
Batch: 26J0458								
Lead	**3.78**	---	0.200	ug/L	1	10/15/26 22:21	EPA 200.8	
22391400-025CF26A (A6J1131-23)				**Matrix: Drinking Water**				
Batch: 26J0458								
Lead	**2.40**	---	0.200	ug/L	1	10/15/26 22:24	EPA 200.8	
22391400-026CF26A (A6J1131-24)				**Matrix: Drinking Water**				
Batch: 26J0458								
Lead	**3.30**	---	0.200	ug/L	1	10/15/26 22:26	EPA 200.8	
22391400-027KF26A (A6J1131-25)				**Matrix: Drinking Water**				
Batch: 26J0458								
Lead	**0.259**	---	0.200	ug/L	1	10/15/26 22:34	EPA 200.8	
22391400-028KF26A (A6J1131-26)				**Matrix: Drinking Water**				
Batch: 26J0458								
Lead	ND	---	0.200	ug/L	1	10/15/26 22:37	EPA 200.8	
22391400-029KF26A (A6J1131-27)				**Matrix: Drinking Water**				
Batch: 26J0458								
Lead	**1.32**	---	0.200	ug/L	1	10/15/26 22:39	EPA 200.8	

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

APEX LABORATORIES

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT


Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Groner Elementary School /**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6J1131 - 10 19 26 1019**

ANALYTICAL SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Sample Result	Detection Limit	Reporting Limit	Units	Dilution	Date Analyzed	Method Ref.	Notes
22391400-030KF26A (A6J1131-28)				**Matrix: Drinking Water**				
Batch: 26J0458								
Lead	**1.97**	---	0.200	ug/L	1	10/15/26 22:42	EPA 200.8	
22391400-031KF26A (A6J1131-29)				**Matrix: Drinking Water**				
Batch: 26J0458								
Lead	**0.454**	---	0.200	ug/L	1	10/15/26 22:44	EPA 200.8	
22391400-032SF26A (A6J1131-30)				**Matrix: Drinking Water**				
Batch: 26J0458								
Lead	**1.51**	---	0.200	ug/L	1	10/15/26 22:47	EPA 200.8	
22391400-033BF26A (A6J1131-31)				**Matrix: Drinking Water**				
Batch: 26J0461								
Lead	**1.04**	---	0.200	ug/L	1	10/16/26 13:49	EPA 200.8	
22391400-034DW26A (A6J1131-32)				**Matrix: Drinking Water**				
Batch: 26J0461								
Lead	**2.78**	---	0.200	ug/L	1	10/16/26 13:57	EPA 200.8	
22391400-035CF26A (A6J1131-33)				**Matrix: Drinking Water**				
Batch: 26J0461								
Lead	**0.791**	---	0.200	ug/L	1	10/16/26 13:59	EPA 200.8	
22391400-036DW26A (A6J1131-34)				**Matrix: Drinking Water**				
Batch: 26J0461								
Lead	**3.35**	---	0.200	ug/L	1	10/16/26 14:02	EPA 200.8	
22391400-037CF26A (A6J1131-35)				**Matrix: Drinking Water**				
Batch: 26J0461								
Lead	**1.17**	---	0.200	ug/L	1	10/16/26 14:04	EPA 200.8	
22391400-038DW26A (A6J1131-36)				**Matrix: Drinking Water**				
Batch: 26J0461								
Lead	**2.06**	---	0.200	ug/L	1	10/16/26 14:07	EPA 200.8	

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

APEX LABORATORIES

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT


Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Groner Elementary School /**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6J1131 - 10 19 26 1019**

ANALYTICAL SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Sample Result	Detection Limit	Reporting Limit	Units	Dilution	Date Analyzed	Method Ref.	Notes
22391400-039CF26A (A6J1131-37)				**Matrix: Drinking Water**				
Batch: 26J0461								
Lead	**0.807**	---	0.200	ug/L	1	10/16/26 14:15	EPA 200.8	
22391400-040DW26A (A6J1131-38)				**Matrix: Drinking Water**				
Batch: 26J0461								
Lead	**1.25**	---	0.200	ug/L	1	10/16/26 14:18	EPA 200.8	
22391400-041CF26A (A6J1131-39)				**Matrix: Drinking Water**				
Batch: 26J0461								
Lead	**0.592**	---	0.200	ug/L	1	10/16/26 14:20	EPA 200.8	
22391400-042DW26A (A6J1131-40)				**Matrix: Drinking Water**				
Batch: 26J0461								
Lead	**2.04**	---	0.200	ug/L	1	10/16/26 14:23	EPA 200.8	
22391400-043CF26A (A6J1131-41)				**Matrix: Drinking Water**				
Batch: 26J0461								
Lead	**0.736**	---	0.200	ug/L	1	10/16/26 14:25	EPA 200.8	
22391400-044DW26A (A6J1131-42RE2)				**Matrix: Drinking Water**				
Batch: 26J0461								
Lead	**3.19**	---	0.200	ug/L	1	10/16/26 15:48	EPA 200.8	
22391400-045CF26A (A6J1131-43)				**Matrix: Drinking Water**				
Batch: 26J0461								
Lead	**0.473**	---	0.200	ug/L	1	10/16/26 14:30	EPA 200.8	
22391400-046BF26A (A6J1131-44)				**Matrix: Drinking Water**				
Batch: 26J0461								
Lead	**2.06**	---	0.200	ug/L	1	10/16/26 15:51	EPA 200.8	
22391400-047BF26A (A6J1131-45)				**Matrix: Drinking Water**				
Batch: 26J0461								
Lead	**1.85**	---	0.200	ug/L	1	10/16/26 15:53	EPA 200.8	

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

APEX LABORATORIES

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT


Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Groner Elementary School /**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6J1131 - 10 19 26 1019**

ANALYTICAL SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Sample Result	Detection Limit	Reporting Limit	Units	Dilution	Date Analyzed	Method Ref.	Notes
22391400-048BF26A (A6J1131-46)				**Matrix: Drinking Water**				
Batch: 26J0461								
Lead	**1.31**	---	0.200	ug/L	1	10/16/26 15:56	EPA 200.8	
22391400-049BF26A (A6J1131-47)				**Matrix: Drinking Water**				
Batch: 26J0461								
Lead	**3.15**	---	0.200	ug/L	1	10/16/26 15:58	EPA 200.8	
22391400-050WC26A (A6J1131-48)				**Matrix: Drinking Water**				
Batch: 26J0461								
Lead	ND	---	0.200	ug/L	1	10/16/26 16:01	EPA 200.8	
22391400-051BF26A (A6J1131-49)				**Matrix: Drinking Water**				
Batch: 26J0461								
Lead	**1.11**	---	0.200	ug/L	1	10/16/26 16:04	EPA 200.8	
22391400-052DW26A (A6J1131-50)				**Matrix: Drinking Water**				
Batch: 26J0461								
Lead	ND	---	0.200	ug/L	1	10/16/26 16:06	EPA 200.8	
22391400-053WB26A (A6J1131-51)				**Matrix: Drinking Water**				
Batch: 26J0473								
Lead	ND	---	0.200	ug/L	1	10/16/26 16:22	EPA 200.8	
22391400-054CF26A (A6J1131-52)				**Matrix: Drinking Water**				
Batch: 26J0473								
Lead	**0.914**	---	0.200	ug/L	1	10/16/26 16:30	EPA 200.8	
22391400-055KF26A (A6J1131-53)				**Matrix: Drinking Water**				
Batch: 26J0473								
Lead	**0.210**	---	0.200	ug/L	1	10/16/26 16:32	EPA 200.8	
22391400-056WC26A (A6J1131-54)				**Matrix: Drinking Water**				
Batch: 26J0473								
Lead	ND	---	0.200	ug/L	1	10/16/26 16:35	EPA 200.8	

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Groner Elementary School /**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6J1131 - 10 19 26 1019**

ANALYTICAL SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Sample Result	Detection Limit	Reporting Limit	Units	Dilution	Date Analyzed	Method Ref.	Notes
22391400-057WB26A (A6J1131-55)				**Matrix: Drinking Water**				
Batch: 26J0473								
Lead	ND	---	0.200	ug/L	1	10/16/26 16:37	EPA 200.8	
22391400-058DW26A (A6J1131-56)				**Matrix: Drinking Water**				
Batch: 26J0473								
Lead	ND	---	0.200	ug/L	1	10/16/26 16:45	EPA 200.8	

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

ANALYTICAL REPORT


Apex Companies, LLC - Portland	Project:	Hillsboro School District
4412 S Corbett Ave	Project Number:	Groner Elementary School /
Portland, OR 97239	Project Manager:	Dale Voeller
		Report ID: A6J1131 - 10 19 26 1019

QUALITY CONTROL (QC) SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Result	Detection Limit	Reporting Limit	Units	Dilution	Spike Amount	Source Result	% REC	% REC Limits	RPD	RPD Limit	Notes
Batch 26J0445 - EPA 200.8 Direct Analysis											Drinking Water	
Blank (26J0445-BLK1)		Prepared: 10/14/26 08:19		Analyzed: 10/15/26 20:16								
EPA 200.8												
Lead	ND	---	0.200	ug/L	1	---	---	---	---	---	---	
LCS (26J0445-BS1)		Prepared: 10/14/26 08:19		Analyzed: 10/15/26 20:18								
EPA 200.8												
Lead	15.4	---	0.201	ug/L	1	15.0	---	103	85 - 115%	---	---	
Matrix Spike (26J0445-MS2)		Prepared: 10/14/26 08:19		Analyzed: 10/15/26 21:34								
QC Source Sample: 22391400-010DW26A (A6J1131-10)												
EPA 200.8												
Lead	18.0	---	0.201	ug/L	1	15.0	3.05	99	70 - 130%	---	---	
Batch 26J0458 - EPA 200.8 Direct Analysis											Drinking Water	
Blank (26J0458-BLK1)		Prepared: 10/14/26 10:20		Analyzed: 10/15/26 21:37								
EPA 200.8												
Lead	ND	---	0.200	ug/L	1	---	---	---	---	---	---	
LCS (26J0458-BS1)		Prepared: 10/14/26 10:20		Analyzed: 10/15/26 21:39								
EPA 200.8												
Lead	15.1	---	0.201	ug/L	1	15.0	---	101	85 - 115%	---	---	
Duplicate (26J0458-DUP1)		Prepared: 10/14/26 10:20		Analyzed: 10/15/26 21:44								
QC Source Sample: 22391400-011CF26A (A6J1131-11)												
EPA 200.8												
Lead	**0.722**	---	0.200	ug/L	1	---	0.723	---	---	0.1	20%	
Matrix Spike (26J0458-MS1)		Prepared: 10/14/26 10:20		Analyzed: 10/15/26 21:47								
QC Source Sample: 22391400-011CF26A (A6J1131-11)												
EPA 200.8												
Lead	15.7	---	0.201	ug/L	1	15.0	0.723	100	70 - 130%	---	---	
Matrix Spike (26J0458-MS2)		Prepared: 10/14/26 10:20		Analyzed: 10/15/26 22:50								
QC Source Sample: 22391400-032SF26A (A6J1131-30)												

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project:	Hillsboro School District	
4412 S Corbett Ave	Project Number:	Groner Elementary School /	Report ID:
Portland, OR 97239	Project Manager:	Dale Voeller	A6J1131 - 10 19 26 1019

QUALITY CONTROL (QC) SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Result	Detection Limit	Reporting Limit	Units	Dilution	Spike Amount	Source Result	% REC	% REC Limits	RPD	RPD Limit	Notes
Batch 26J0458 - EPA 200.8 Direct Analysis											Drinking Water	
Matrix Spike (26J0458-MS2)		Prepared: 10/14/26 10:20		Analyzed: 10/15/26 22:50								
QC Source Sample: 22391400-032SF26A (A6J1131-30)												
EPA 200.8												
Lead	16.4	---	0.201	ug/L	1	15.0	1.51	99	70 - 130%	---	---	

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project:	Hillsboro School District
4412 S Corbett Ave	Project Number:	Groner Elementary School /
Portland, OR 97239	Project Manager:	Dale Voeller


Report ID:
A6J1131 - 10 19 26 1019

QUALITY CONTROL (QC) SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Result	Detection Limit	Reporting Limit	Units	Dilution	Spike Amount	Source Result	% REC	% REC Limits	RPD	RPD Limit	Notes
Batch 26J0461 - EPA 200.8 Direct Analysis												**Drinking Water**
Blank (26J0461-BLK1)		Prepared: 10/14/26 10:55		Analyzed: 10/16/26 13:44								
EPA 200.8												
Lead	ND	---	0.200	ug/L	1	---	---	---	---	---	---	
LCS (26J0461-BS2)		Prepared: 10/14/26 10:55		Analyzed: 10/16/26 15:43								
EPA 200.8												
Lead	15.7	---	0.201	ug/L	1	15.0	---	105	85 - 115%	---	---	Q-16
Duplicate (26J0461-DUP2)		Prepared: 10/14/26 10:55		Analyzed: 10/16/26 15:45								
QC Source Sample: 22391400-033BF26A (A6J1131-31)												
EPA 200.8												
Lead	**1.06**	---	0.200	ug/L	1	---	1.04	---	---	2	20%	Q-16
Matrix Spike (26J0461-MS1)		Prepared: 10/14/26 10:55		Analyzed: 10/16/26 13:54								
QC Source Sample: 22391400-033BF26A (A6J1131-31)												
EPA 200.8												
Lead	16.4	---	0.201	ug/L	1	15.0	1.04	102	70 - 130%	---	---	
Matrix Spike (26J0461-MS2)		Prepared: 10/14/26 10:55		Analyzed: 10/16/26 16:14								
QC Source Sample: 22391400-052DW26A (A6J1131-50)												
EPA 200.8												
Lead	15.4	---	0.201	ug/L	1	15.0	ND	103	70 - 130%	---	---	

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project:	Hillsboro School District
4412 S Corbett Ave	Project Number:	Groner Elementary School /
Portland, OR 97239	Project Manager:	Dale Voeller


Report ID:
A6J1131 - 10 19 26 1019

QUALITY CONTROL (QC) SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Result	Detection Limit	Reporting Limit	Units	Dilution	Spike Amount	Source Result	% REC	% REC Limits	RPD	RPD Limit	Notes
Batch 26J0473 - EPA 200.8 Direct Analysis											Drinking Water	
Blank (26J0473-BLK1)		Prepared: 10/14/26 12:44		Analyzed: 10/16/26 16:17								
EPA 200.8												
Lead	ND	---	0.200	ug/L	1	---	---	---	---	---	---	
LCS (26J0473-BS1)		Prepared: 10/14/26 12:44		Analyzed: 10/16/26 16:19								
EPA 200.8												
Lead	15.5	---	0.201	ug/L	1	15.0	---	104	85 - 115%	---	---	
Duplicate (26J0473-DUP1)		Prepared: 10/14/26 12:44		Analyzed: 10/16/26 16:25								
QC Source Sample: 22391400-053WB26A (A6J1131-51)												
EPA 200.8												
Lead	ND	---	0.200	ug/L	1	---	ND	---	---	---	20%	
Matrix Spike (26J0473-MS1)		Prepared: 10/14/26 12:44		Analyzed: 10/16/26 16:27								
QC Source Sample: 22391400-053WB26A (A6J1131-51)												
EPA 200.8												
Lead	15.2	---	0.201	ug/L	1	15.0	ND	101	70 - 130%	---	---	

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Groner Elementary School /**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6J1131 - 10 19 26 1019**


SAMPLE PREPARATION INFORMATION

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Prep: EPA 200.8 Direct Analysis

Lab Number	Matrix	Method	Sampled	Prepared	Sample Initial/Final	Default Initial/Final	RL Prep Factor
Batch: 26J0445							
A6J1131-01	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 08:19	10mL/10mL	10mL/10mL	1.00
A6J1131-02	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 08:19	10mL/10mL	10mL/10mL	1.00
A6J1131-03	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 08:19	10mL/10mL	10mL/10mL	1.00
A6J1131-04	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 08:19	10mL/10mL	10mL/10mL	1.00
A6J1131-05	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 08:19	10mL/10mL	10mL/10mL	1.00
A6J1131-06	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 08:19	10mL/10mL	10mL/10mL	1.00
A6J1131-07	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 08:19	10mL/10mL	10mL/10mL	1.00
A6J1131-08	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 08:19	10mL/10mL	10mL/10mL	1.00
A6J1131-09	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 08:19	10mL/10mL	10mL/10mL	1.00
A6J1131-10	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 08:19	10mL/10mL	10mL/10mL	1.00
Batch: 26J0458							
A6J1131-11	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:20	10mL/10mL	10mL/10mL	1.00
A6J1131-12	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:20	10mL/10mL	10mL/10mL	1.00
A6J1131-13	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:20	10mL/10mL	10mL/10mL	1.00
A6J1131-14	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:20	10mL/10mL	10mL/10mL	1.00
A6J1131-15	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:20	10mL/10mL	10mL/10mL	1.00
A6J1131-16	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:20	10mL/10mL	10mL/10mL	1.00
A6J1131-17	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:20	10mL/10mL	10mL/10mL	1.00
A6J1131-18	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:20	10mL/10mL	10mL/10mL	1.00
A6J1131-19	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:20	10mL/10mL	10mL/10mL	1.00
A6J1131-20	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:20	10mL/10mL	10mL/10mL	1.00
A6J1131-21	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:20	10mL/10mL	10mL/10mL	1.00
A6J1131-22	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:20	10mL/10mL	10mL/10mL	1.00
A6J1131-23	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:20	10mL/10mL	10mL/10mL	1.00
A6J1131-24	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:20	10mL/10mL	10mL/10mL	1.00
A6J1131-25	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:20	10mL/10mL	10mL/10mL	1.00
A6J1131-26	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:20	10mL/10mL	10mL/10mL	1.00
A6J1131-27	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:20	10mL/10mL	10mL/10mL	1.00
A6J1131-28	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:20	10mL/10mL	10mL/10mL	1.00
A6J1131-29	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:20	10mL/10mL	10mL/10mL	1.00
A6J1131-30	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:20	10mL/10mL	10mL/10mL	1.00
Batch: 26J0461							
A6J1131-31	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:55	10mL/10mL	10mL/10mL	1.00
A6J1131-32	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:55	10mL/10mL	10mL/10mL	1.00
A6J1131-33	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:55	10mL/10mL	10mL/10mL	1.00

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Groner Elementary School /**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6J1131 - 10 19 26 1019**

SAMPLE PREPARATION INFORMATION

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Prep: EPA 200.8 Direct Analysis

Lab Number	Matrix	Method	Sampled	Prepared	Sample Initial/Final	Default Initial/Final	RL Prep Factor
A6J1131-34	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:55	10mL/10mL	10mL/10mL	1.00
A6J1131-35	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:55	10mL/10mL	10mL/10mL	1.00
A6J1131-36	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:55	10mL/10mL	10mL/10mL	1.00
A6J1131-37	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:55	10mL/10mL	10mL/10mL	1.00
A6J1131-38	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:55	10mL/10mL	10mL/10mL	1.00
A6J1131-39	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:55	10mL/10mL	10mL/10mL	1.00
A6J1131-40	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:55	10mL/10mL	10mL/10mL	1.00
A6J1131-41	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:55	10mL/10mL	10mL/10mL	1.00
A6J1131-42RE2	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:55	10mL/10mL	10mL/10mL	1.00
A6J1131-43	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:55	10mL/10mL	10mL/10mL	1.00
A6J1131-44	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:55	10mL/10mL	10mL/10mL	1.00
A6J1131-45	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:55	10mL/10mL	10mL/10mL	1.00
A6J1131-46	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:55	10mL/10mL	10mL/10mL	1.00
A6J1131-47	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:55	10mL/10mL	10mL/10mL	1.00
A6J1131-48	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:55	10mL/10mL	10mL/10mL	1.00
A6J1131-49	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:55	10mL/10mL	10mL/10mL	1.00
A6J1131-50	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 10:55	10mL/10mL	10mL/10mL	1.00
Batch: 26J0473							
A6J1131-51	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 12:44	10mL/10mL	10mL/10mL	1.00
A6J1131-52	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 12:44	10mL/10mL	10mL/10mL	1.00
A6J1131-53	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 12:44	10mL/10mL	10mL/10mL	1.00
A6J1131-54	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 12:44	10mL/10mL	10mL/10mL	1.00
A6J1131-55	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 12:44	10mL/10mL	10mL/10mL	1.00
A6J1131-56	Drinking Water	EPA 200.8	09/26/26 00:00	10/14/26 12:44	10mL/10mL	10mL/10mL	1.00

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project:	**Hillsboro School District**	
4412 S Corbett Ave	Project Number:	**Groner Elementary School /**	**Report ID:**
Portland, OR 97239	Project Manager:	**Dale Voeller**	**A6J1131 - 10 19 26 1019**


QUALIFIER DEFINITIONS

Client Sample and Quality Control (QC) Sample Qualifier Definitions:

Apex Laboratories

Q-16 Reanalysis of an original Batch QC sample.

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Groner Elementary School /**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6J1131 - 10 19 26 1019**

REPORTING NOTES AND CONVENTIONS:

Abbreviations:

DET Analyte DETECTED at or above the detection or reporting limit.

ND Analyte NOT DETECTED at or above the detection or reporting limit.

NR Result Not Reported.

RPD Relative Percent Difference. RPDs for Matrix Spikes and Matrix Spike Duplicates are based on concentration, not recovery.

Detection Limits: Limit of Detection (LOD)

Limits of Detection (LODs) are normally set at a level of one half the validated Limit of Quantitation (LOQ). If no value is listed ('-----'), then the data has not been evaluated below the Reporting Limit.

Reporting Limits: Limit of Quantitation (LOQ)

Validated Limits of Quantitation (LOQs) are reported as the Reporting Limits for all analyses where the LOQ, MRL, PQL or CRL are requested. The LOQ represents a level at or above the low point of the calibration curve, that has been validated according to Apex Laboratories' comprehensive LOQ policies and procedures.

Reporting and Detection Limits: Default Limits

Default Reporting and Detection Limits are based on 100% dry weight with the minimum dilution for the analysis. Reporting and Detection Limits are raised due to moisture content, additional dilutions required for analysis, matrix interferences and in other cases, as necessary.

Reporting Conventions:

Basis: Results for soil samples are generally reported on a 100% dry weight basis.

Results where dry weight correction has not been applied do not have the "dry" designation appended to the units, and results are reported on an "as received" basis.

Results for Volatiles analyses on soils and sediments that are reported on a “dry weight” basis include the water miscible solvent (WMS) correction referenced in the EPA 8000 Method guidance documents. Solid and Liquid samples reported on an “As Received” basis do not have the WMS correction applied, as dry weight was not performed.

QC Source:

In cases where there is insufficient sample provided for Sample Duplicates and/or Matrix Spikes, a Lab Control Sample Duplicate (LCS Dup) may be analyzed to demonstrate accuracy and precision of the extraction batch.


Non-Client Batch QC Samples (Duplicates and Matrix Spike/Duplicates) are not included in this report. Please request a Full QC report if this data is required.

Miscellaneous Notes:

" --- " QC results are not applicable. For example, % Recoveries for Blanks and Duplicates, % RPD for Blanks, Blank Spikes and Matrix Spikes, etc.

" *** " Used to indicate a possible discrepancy with the Sample and Sample Duplicate results when the %RPD is not available. In this case, either the Sample or the Sample Duplicate has a reportable result for this analyte, while the other is Non Detect (ND).

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

Apex Companies, LLC - Portland	Project:	**Hillsboro School District**	
4412 S Corbett Ave	Project Number:	**Groner Elementary School /**	**Report ID:**
Portland, OR 97239	Project Manager:	**Dale Voeller**	**A6J1131 - 10 19 26 1019**

REPORTING NOTES AND CONVENTIONS (Cont.):

Blanks:

Standard practice is to evaluate the results from Blank QC Samples down to a level equal to one half of the Reporting Limit (RL).
Blank results for gravimetric analyses are evaluated to the Reporting Level, not to half of the Reporting Level.
-For Blank hits falling between ½ the RL and the RL (J flagged hits), the associated sample and QC data will receive a 'B-02' qualifier.
-For Blank hits above the RL, the associated sample and QC data will receive a 'B' qualifier, per Apex Laboratories' Blank Policy.
For further details, please request a copy of this document.

Sample results flagged with a 'B' or 'B-02' qualifier are potentially biased high if the sample results are less than ten times the level found in the blank for inorganic analyses, or less than five times the level found in the blank for organic analyses.
'B' and 'B-02' qualifications are only applied to sample results detected above the Reporting Level.

Preparation Notes:

Mixed Matrix Samples:

Water Samples:

Water samples containing significant amounts of sediment are decanted or separated prior to extraction, and only the water portion analyzed, unless otherwise directed by the client.

Soil and Sediment Samples:


Soil and Sediment samples containing significant amounts of water are decanted prior to extraction, and only the solid portion analyzed, unless otherwise directed by the client.

Sampling and Preservation Notes:

Certain regulatory programs, such as National Pollutant Discharge Elimination System (NPDES), require that activities such as sample filtration (for dissolved metals, orthophosphate, hexavalent chromium, etc.) and testing of short hold analytes (pH, Dissolved Oxygen, etc.) be performed in the field (on-site) within a short time window. In addition, sample matrix spikes are required for some analyses, and sufficient volume must be provided, and billable site specific QC requested, if this is required. All regulatory permits should be reviewed to ensure that these requirements are being met.

Data users should be aware of which regulations pertain to the samples they submit for testing. If related sample collection activities are not approved for a particular regulatory program, results should be considered estimates. Apex Laboratories will qualify these analytes according to the most stringent requirements, however results for samples that are for non-regulatory purposes may be acceptable.

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project:	**Hillsboro School District**	
4412 S Corbett Ave	Project Number:	**Groner Elementary School /**	**Report ID:**
Portland, OR 97239	Project Manager:	**Dale Voeller**	**A6J1131 - 10 19 26 1019**

Decanted Samples:

Soils/Sediments:
Unless TCLP analysis is required or there is notification otherwise for a specific project, all Soil and Sediments containing excess water are decanted prior to analysis in order to provide the most representative sample for analysis.

Water Samples:
Water samples containing solids and sediment may need to be decanted in order to eliminate these particulates from the water extractions. In the case of organics extractions, a solvent rinse of the container will not be performed.

Volatiles Soils (5035s)
Samples that are field preserved by 5035 for volatiles are dry weight corrected using the same dry weight corretion as for normal analyses. In the case of decanted samples, the dry weight may be performed on a decanted sample, while the aliquot for 5035 may not have been treated the same way. If this is a concern, please submit separate containers for dry weight analysis for volatiles can be provided.

All samples decanted in the laboratory are noted in this report with the DCNT qualifier indicating the sample was decanted.

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Groner Elementary School /**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6J1131 - 10 19 26 1019**

LABORATORY ACCREDITATION INFORMATION

ORELAP Certification ID: OR100062 (Primary Accreditation)
EPA ID: OR01039

All methods and analytes reported from work performed at Apex Laboratories are included on Apex Laboratories' ORELAP Scope of Certification, with the exception of any analyte(s) listed below:

Apex Laboratories

Matrix	Analysis	Analyte	TNI_ID	Accreditation
All reported analytes are included in Apex Laboratories' current ORELAP scope.				

Secondary Accreditations

Apex Laboratories also maintains reciprocal accreditation with non-TNI states (Washington DOE), as well as other state specific accreditations not listed here.


Subcontract Laboratory Accreditations

Subcontracted data falls outside of Apex Laboratories' Scope of Accreditation.
Please see the Subcontract Laboratory report for full details, or contact your Project Manager for more information.

Field Testing Parameters

Results for Field Tested data are provded by the client or sampler, and fall outside of Apex Laboratories' Scope of Accreditation.

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Groner Elementary School /**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6J1131 - 10 19 26 1019**

APEX

Lead in Drinking Water COC A6J1131

Date Collected: 09/26/2026 PBS Project: 26010605 / 0003

School Name: Groner Elementary School

Building: Main Building - Round 1 Building Number: 22391400

Analysis Requested: Lead (Pb) in Drinking Water

Email Results To: dale.voeller@apexcos.com Turnaround Time: 10-day

	Fixture Number	Sample Number	Location / Description
1	001	22391400-001NS26A	Health Room Sink
2	002	22391400-002DW26A	Gym Hall Drinking Fountain - Left
3	003	22391400-003WB26A	Gym Hall Water Bottle Filler
4	004	22391400-004DW26A	Gym Hall Drinking Fountain - Right
5	005	22391400-005BF26A	Gym Hall Girls RR Sink - Left
6	006	22391400-006BF26A	East Wing ADA RR Sink
7	007	22391400-007BF26A	East Wing South Boys RR Sink - Left
8	008	22391400-008BF26A	East Wing South Boys RR Sink - Right
9	009	22391400-009CF26A	Room 1 Classroom Faucet
10	010	22391400-010DW26A	Hall Drinking Fountain Between Rooms 1 & 3
11	011	22391400-011CF26A	Room 3 Classroom Faucet
12	012	22391400-012CF26A	Room 5 Classroom Faucet
13	013	22391400-013BF26A	East Wing Girls North RR Sink - Left
14	014	22391400-014BF26A	East Wing Girls North RR Sink - Right
15	015	*- Fixture Replaced -*	East Wing Hall Drinking Fountain at Girls North RR (West Side)
16	016		East Wing North Exit Hall Drinking Fountain ~ NOT WORKING
17	017	22391400-017CF26A	Room 9 Classroom Faucet
18	018	22391400-018CF26A	Room 8 Classroom Faucet
19	019	22391400-019CF26A	Room 6 Classroom Faucet
20	020	22391400-020DW26A	East Wing Hall Drinking Fountain at Boys North RR (East Side)
21	021	22391400-021BF26A	East Wing Boys North RR Sink - Left
22	022	22391400-022BF26A	East Wing Boys North RR Sink - Right
23	023	22391400-023CF26A	Room 4 Classroom Faucet
24	024	22391400-024DW26A	Room 2 Drinking Fountain
25	025	22391400-025CF26A	Room 2 Classroom Faucet

APEX

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Groner Elementary School /**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6J1131 - 10 19 26 1019**

A6J1131

Lead in Drinking Water Testing Program — Hillsboro School District

Date Collected: 09/26/2026 — School Name: Groner Elementary School

	Fixture Number	Sample Number	Location / Description
26	026	22391400-026CF26A	Library Classroom Faucet
27	027	22391400-027KF26A	Kitchen, Single Prep Sink at South Wall
28	028	22391400-028KF26A	Kitchen, Double Prep Sink at North Wall
29	029	22391400-029KF26A	Kitchen, Pot Filler Faucet
30	030	22391400-030KF26A	Kitchen, Hand Wash Sink at Scullery
31	031	22391400-031KF26A	Kitchen, Small Prep Sink in Scullery
32	032	22391400-032SF26A	Faculty Break Room Sink
33	033	22391400-033BF26A	West Wing Faculty RR Sink
34	034	22391400-034DW26A	Room 10 Drinking Fountain
35	035	22391400-035CF26A	Room 10 Classroom Faucet
36	036	22391400-036DW26A	Room 12 Drinking Fountain
37	037	22391400-037CF26A	Room 12 Classroom Faucet
38	038	22391400-038DW26A	Room 14 Drinking Fountain
39	039	22391400-039CF26A	Room 14 Classroom Faucet
40	040	22391400-040DW26A	Room 16 Drinking Fountain
41	041	22391400-041CF26A	Room 16 Classroom Faucet
42	042	22391400-042DW26A	Room 15 Drinking Fountain
43	043	22391400-043CF26A	Room 15 Classroom Faucet
44	044	22391400-044DW26A	Room 13 Drinking Fountain
45	045	22391400-045CF26A	Room 13 Classroom Faucet
46	046	22391400-046BF26A	West Wing Girls RR Sink - Left
47	047	22391400-047BF26A	West Wing Girls RR Sink - Right
48	048	22391400-048BF26A	West Wing Boys RR Sink - Left
49	049	22391400-049BF26A	West Wing Boys RR Sink - Right
50	050	22391400-050WC26A	Health Room – Water Chiller
51	051	22391400-051BF26A	Gym Hall Girls RR Sink – Right
52	052	22391400-052DW26A	East Wing Hall at Girls North RR (West Side) - Drinking Fountain
53	053	22391400-053WB26A	East Wing Hall at Girls North RR (West Side) – Bottle Filler
54	054	22391400-054CF26A	Room 7 Classroom Faucet
55	055	22391400-055KF26A	Kitchen, Sink at dishwashing station in Scullery
56	056	22391400-056WC26A	Faculty Break Room – Water Chiller

APEX

Apex Laboratories

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Jason Woodcock, Project Manager

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Groner Elementary School /**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6J1131 - 10 19 26 1019**

Lead in Drinking Water Testing Program — A6J1131 Hillsboro School District

Date Collected: 09/26/2026 — School Name: Groner Elementary School

	Fixture Number	Sample Number	Location / Description
57	057	22391400-057WB26A	West Wing Hall by Room 16 – Bottle Filler
58	058	22391400-058DW26A	West Wing Hall by Room 16 – Drinking Fountain

Relinquished By/Signature: _____ Date/Time: 9/28/26 2:20pm

Received By/Signature: _____ Date/Time: 9/29/26 1122

APEX.

Apex Laboratories

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Jason Woodcock, Project Manager

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Groner Elementary School /**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6J1131 - 10 19 26 1019**

WO# A1J1131

COC/Container Discrepancies

COC Reads	Container Reads/Comments
22391400-050WC26A	22391400-050 26A
" 052DW 26A	" -052DF26A
" 054CF 26A	" -054CF
" 055KF26A	" -055KF
" 056WC 26A	" -056
" 057WB 26A	" -057WB
" 058DW 26A	" -058DW

Form Y-004 R-00

Apex Laboratories

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Jason Woodcock, Project Manager

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Groner Elementary School /**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6J1131 - 10 19 26 1019**

APEX LABS COOLER RECEIPT FORM

Client: Apex Companies Element WO#: A6J1131

Project/Project #: Groner Elementary School main Building - Round 1/ 260106057 0003

Delivery Info:

Date/time received: 9/24/26 @ 1122 By: JPE

Delivered by: Apex X Client ESS FedEx UPS Radio Morgan SDS Evergreen Other

From USDA Regulated Origin? Yes ____ No X

Cooler Inspection Date/time inspected: 9/29/26 @ 1213 By: JPE

Chain of Custody included? Yes X No ____

Signed/dated by client? Yes X No ____

Contains USDA Reg. Soils? Yes ____ No X Unsure (email RegSoils) ____

	Cooler #1	Cooler #2	Cooler #3	Cooler #4	Cooler #5	Cooler #6	Cooler #7
Temperature (°C)	21.4						
Custody seals? (Y/N)	N						
Received on ice? (Y/N)	N						
Temp. blanks? (Y/N)	N						
Ice type: (Gel/Real/Other)	none						
Condition (In/Out):	out						

Cooler out of temp? (Y/N) Possible reason why: Drinking waters

Green dots applied to out of temperature samples? Yes (No)

Out of temperature samples form initiated? Yes (No)

Sample Inspection: Date/time inspected: 10/1/26 @ 1515 By: KMS

All samples intact? Yes X No ___ Comments: ____

Bottle labels/COCs agree? Yes ___ No X Comments: SEE FORM

COC/container discrepancies form initiated? Yes X No ___

Containers/volumes received appropriate for analysis? Yes X No ___ Comments: ____

Do VOA vials have visible headspace? Yes ___ No ___ NA X

Comments ____

Water samples: pH checked: Yes X No ___ NA ___ pH appropriate? Yes X No ___ NA ___ pH ID: A256271

Comments: ____

Labeled by: DM Witness: DA Cooler Inspected by: DM

Form Y-003 R-02

Apex Laboratories

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Jason Woodcock, Project Manager