October 21, 2026

Will Wenzloff
Hillsboro School District
4901 SE Witch Hazel Road
Hillsboro, Oregon 97123

Via email: wenzlofw@hsd.k12.or.us

Regarding: Drinking Water Sampling Report
Mooberry Elementary School
1230 NE 10th Avenue
Hillsboro, Oregon
Apex Project No. 26010605 / 0006

Dear Mr. Wenzloff:

On September 19 and October 3, 2026, Apex Companies LLC (Apex) collected drinking water samples at Mooberry Elementary School in Hillsboro, Oregon. The testing was requested by Hillsboro School District as part of their efforts to ensure that concentrations of lead in drinking water at the school remain below the Oregon Department of Education (ODE) action level of 10 parts per billion (ppb).

The Mooberry campus includes the main building, a modular classroom building, and a stand-alone gymnasium.

The drinking fountain in the music room was not working during the initial round of sampling. That fixture was turned back on and subsequently sampled on October 3rd. The two drinking fountains in the hallway outside the gymnasium have been replaced with two new drinking fountains and a water bottle filler. The former fixture numbers for those drinking fountains, fixtures 046 and 047, have been retired and the new fixtures have been assigned fixture numbers 075, 076, and 077. Two other fixtures have been removed since the previous round of school-wide drinking water sampling was completed in 2021

Water from all fixtures in the school used for drinking or food preparation have lead concentrations below 10 ppb.

Ninety-eight samples were collected and delivered under chain of custody to Apex Laboratories in Tigard, Oregon, for lead analysis. The results of the sampling is shown in the table below.

Main Building

Fixture Number	Sample Number	Location / Room No.	Results (ppb)
001	22390700-001NS26A	Health Room – sink faucet	ND
002	22390700-002SF26A	Staff Workroom - sink faucet	0.233
003	22390700-003DW26A	Room 1 -Drinking fountain	ND

Fixture Number	Sample Number	Location / Room No.	Results (ppb)
004	22390700-004CF26A	Room 1 – Classroom faucet	0.676
005	22390700-005DW26A	Room 2 -Drinking fountain	ND
006	22390700-006CF26A	Room 2 – Classroom faucet	ND
007	22390700-007DW26A	Room 3 -Drinking fountain	ND
008	22390700-008CF26A	Room 3 – Classroom faucet	ND
009	22390700-009DW26A	Room 4 -Drinking fountain	ND
010	22390700-010CF26A	Room 4 – Classroom faucet	ND
011	22390700-011DW26A	Room 5 -Drinking fountain	ND
012	22390700-012CF26A	Room 5 – Classroom faucet	0.613
013	22390700-013DW26A	Room 6 -Drinking fountain	0.257
014	22390700-014CF26A	Room 6 – Classroom faucet	0.674
015	22390700-015DW26A	Room 7 -Drinking fountain	ND
016	22390700-016CF26A	Room 7 – Classroom faucet	ND
017	22390700-017DW26A	Room 8 -Drinking fountain	0.260
018	22390700-018CF26A	Room 8 – Classroom faucet	0.905
019	22390700-019DW26A	Room 9 -Drinking fountain	ND
020	22390700-020CF26A	Room 9 – Classroom faucet	ND
021	22390700-021SF26A	Room 24 - Staff workroom sink faucet	ND
022	22390700-022DW26A	Room 10 -Drinking fountain	ND
023	22390700-023CF26A	Room 10 – Classroom faucet	0.382
024	22390700-024DW26A	Room 11 -Drinking fountain	ND
025	22390700-025CF26A	Room 11 – Classroom faucet	ND
026	22390700-026DW26A	Room 12 -Drinking fountain	ND
027	22390700-027CF26A	Room 12 – Classroom faucet	ND
028	22390700-028DW26A	Room 13 -Drinking fountain	ND
029	22390700-029CF26A	Room 13 – Classroom faucet	ND
030	22390700-030DW26A	Room 14 - Drinking fountain	ND
031	22390700-031CF26A	Room 14 – Classroom faucet	0.249
032	22390700-032DW26A	Room 15 -Drinking fountain	ND
033	22390700-033CF26A	Room 15 – Classroom faucet	ND
034	22390700-034DW26A	Room 16 - Drinking fountain	ND
035	22390700-035CF26A	Room 16 – Classroom faucet	ND
036	22390700-036DW26A	Room 17 -Drinking fountain	0.335
037	22390700-037CF26A	Room 17 – Classroom faucet	0.331
038	22390700-038DW26A	Room 18 -Drinking fountain	ND
039	22390700-039CF26A	Room 18 – Classroom faucet	ND
040	22390700-040DW26A	Room 20 – Drinking fountain	0.552
041	22390700-041CF26A	Room 20 – Classroom faucet	0.386
042	22390700-042KF26A	Kitchen – Prep sink (spray head only)	ND
043	22390700-043SF26A	Faculty lunchroom – Sink faucet	ND
044	22390700-044WC26A	Faculty lunchroom – Water cooler	ND

Fixture Number	Sample Number	Location / Room No.	Results (ppb)
045		NO FIXTURE	
046	Fixture Replaced	Hallway at gym – Drinking fountain – left (now fixtures 075, 076, & 077)	
047	Fixture Replaced	Hallway at gym – Drinking fountain – right (now fixtures 075, 076, & 077)	
048	22390700-048DW26A	Room K101 – Drinking fountain	1.06
049	22390700-049CF26A	Room K101 – Classroom faucet	ND
050	22390700-050CF26A	Room K102 – NW sink classroom faucet	0.465
051	22390700-051CF26A	Room K102 – NE sink classroom faucet	4.33
052	22390700-052DW26A	Room K103 – Drinking fountain	1.23
053	22390700-053CF26A	Room K103 – Classroom faucet	1.20
054	22390700-054BF26A	Lobby ADA restroom sink	ND
055		NO FIXTURE	
056	22390700-056BF26A	Staff restroom in main office	ND
057	22390700-057BF26A	West girls restroom sink - left	0.244
058	22390700-058BF26A	West girls restroom sink - center	ND
059	22390700-059BF26A	West girls restroom sink - right	ND
060	22390700-060BF26A	West boys restroom sinks – left to right	ND
061	22390700-061BF26A	West boys restroom sinks – left to right	ND
062	22390700-062BF26A	West boys restroom sinks – left to right	ND
063	22390700-063BF26A	West boys restroom sinks – left to right	ND
064	22390700-064BF26A	East boys restroom sinks – left to right	ND
065	22390700-065BF26A	East boys restroom sinks – left to right	ND
066	22390700-066BF26A	East boys restroom sinks – left to right	ND
067	22390700-067BF26A	East boys restroom sinks – left to right	ND
068	22390700-068BF26A	East girls restroom sink - left	ND
069	22390700-069BF26A	East girls restroom sink - center	ND
070	22390700-070BF26A	East girls restroom sink - right	ND
071	22390700-071BF26A	Staff restroom near faculty break room	ND
072	22390700-072DW26A	Room 23 music room drinking fountain	0.918
073	22390700-073CF26A	Room 23 music room – classroom faucet	2.71
074	22390700-074KF26A	Kitchen double prep sink faucet	ND
075	22390700-075WB26A	Hallway at gym – water bottle filler	ND
076	22390700-076DW26A	Hallway at gym – Drinking fountain – left	ND
077	22390700-077DW6A	Hallway at gym – Drinking fountain – right	ND

ND = no lead detected

Modular Building

Fixture Number	Sample Number	Location / Room No.	Results (ppb)
001	22390706-001CF26A	Room M-5 – Classroom faucet	ND
002	22390706-002DW26A	Hall at restrooms, drinking fountain - left	ND
003	22390706-003DW26A	Hall at restrooms, drinking fountain - right	ND
004	22390706-004CF26A	Room M-1 – Classroom faucet	ND
005	22390706-005CF26A	Room M-2 - Classroom faucet	0.811
006	22390706-006CF26A	Room M-3 – Classroom faucet	ND
007	22390706-007CF26A	Room M-4 - Classroom faucet	0.233
008	22390706-008BF26A	Room M-5 – restroom sink faucet	ND
009	22390706-009BF26A	Girls restroom sink - left	ND
010	22390706-010BF26A	Girls restroom sink - right	ND
011	22390706-011BF26A	Boys restroom sink - left	ND
012	22390706-012BF26A	Boys restroom sink - right	ND
013	22390706-013BF26A	Staff restroom sink	ND

Gymnasium

Fixture Number	Sample Number	Location / Room No.	Results (ppb)
001	22390707-001WB26A	Gym lobby – water bottle filler	ND
002	22390707-002DW26A	Gym lobby – drinking fountain, left	ND
003	22390707-003DW26A	Gym lobby – drinking fountain, right	ND
004	22390707-004BF26A	North ADA restroom (nearest to lobby) sink	ND
005	22390707-005BF26A	Restroom sinks – left to right (1)	ND
006	22390707-006BF26A	Restroom sinks – left to right (2)	ND
007	22390707-007BF26A	Restroom sinks – left to right (3)	ND
008	22390707-008BF26A	Restroom sinks – left to right (4)	ND
009	22390707-009BF26A	Restroom sinks – left to right (5)	ND
010	22390707-010BF26A	South ADA restroom sink	ND

Please refer to the attached fixture location drawings and laboratory analytical report for additional details.

The laboratory analytical results are reported in micrograms per liter (µg/L), a unit of measure that is equivalent to ppb.

Sampling methodology and the interpretation of laboratory results were based on the Environmental Protection Agency guidance document titled *3Ts for Reducing Lead in Drinking Water in Schools*. Following this guideline, Apex collected first draw samples from each test location. First draw samples consist of the first 250 milliliters (mL) of water drawn from a fixture after the water has been sitting stagnant for at least 8 hours. The 3Ts' sampling

protocol specifying 250-mL samples is designed to maximize the likelihood that the highest concentrations of lead in water used for consumption are identified.


Please feel free to contact me at 503.515.4726 or dale.voeller@apexcos.com with any questions or comments.

Sincerely,




Dale Voeller, CSP
Senior Project Manager


Attachment: Fixture Location Drawings
Laboratory Analytical Reports

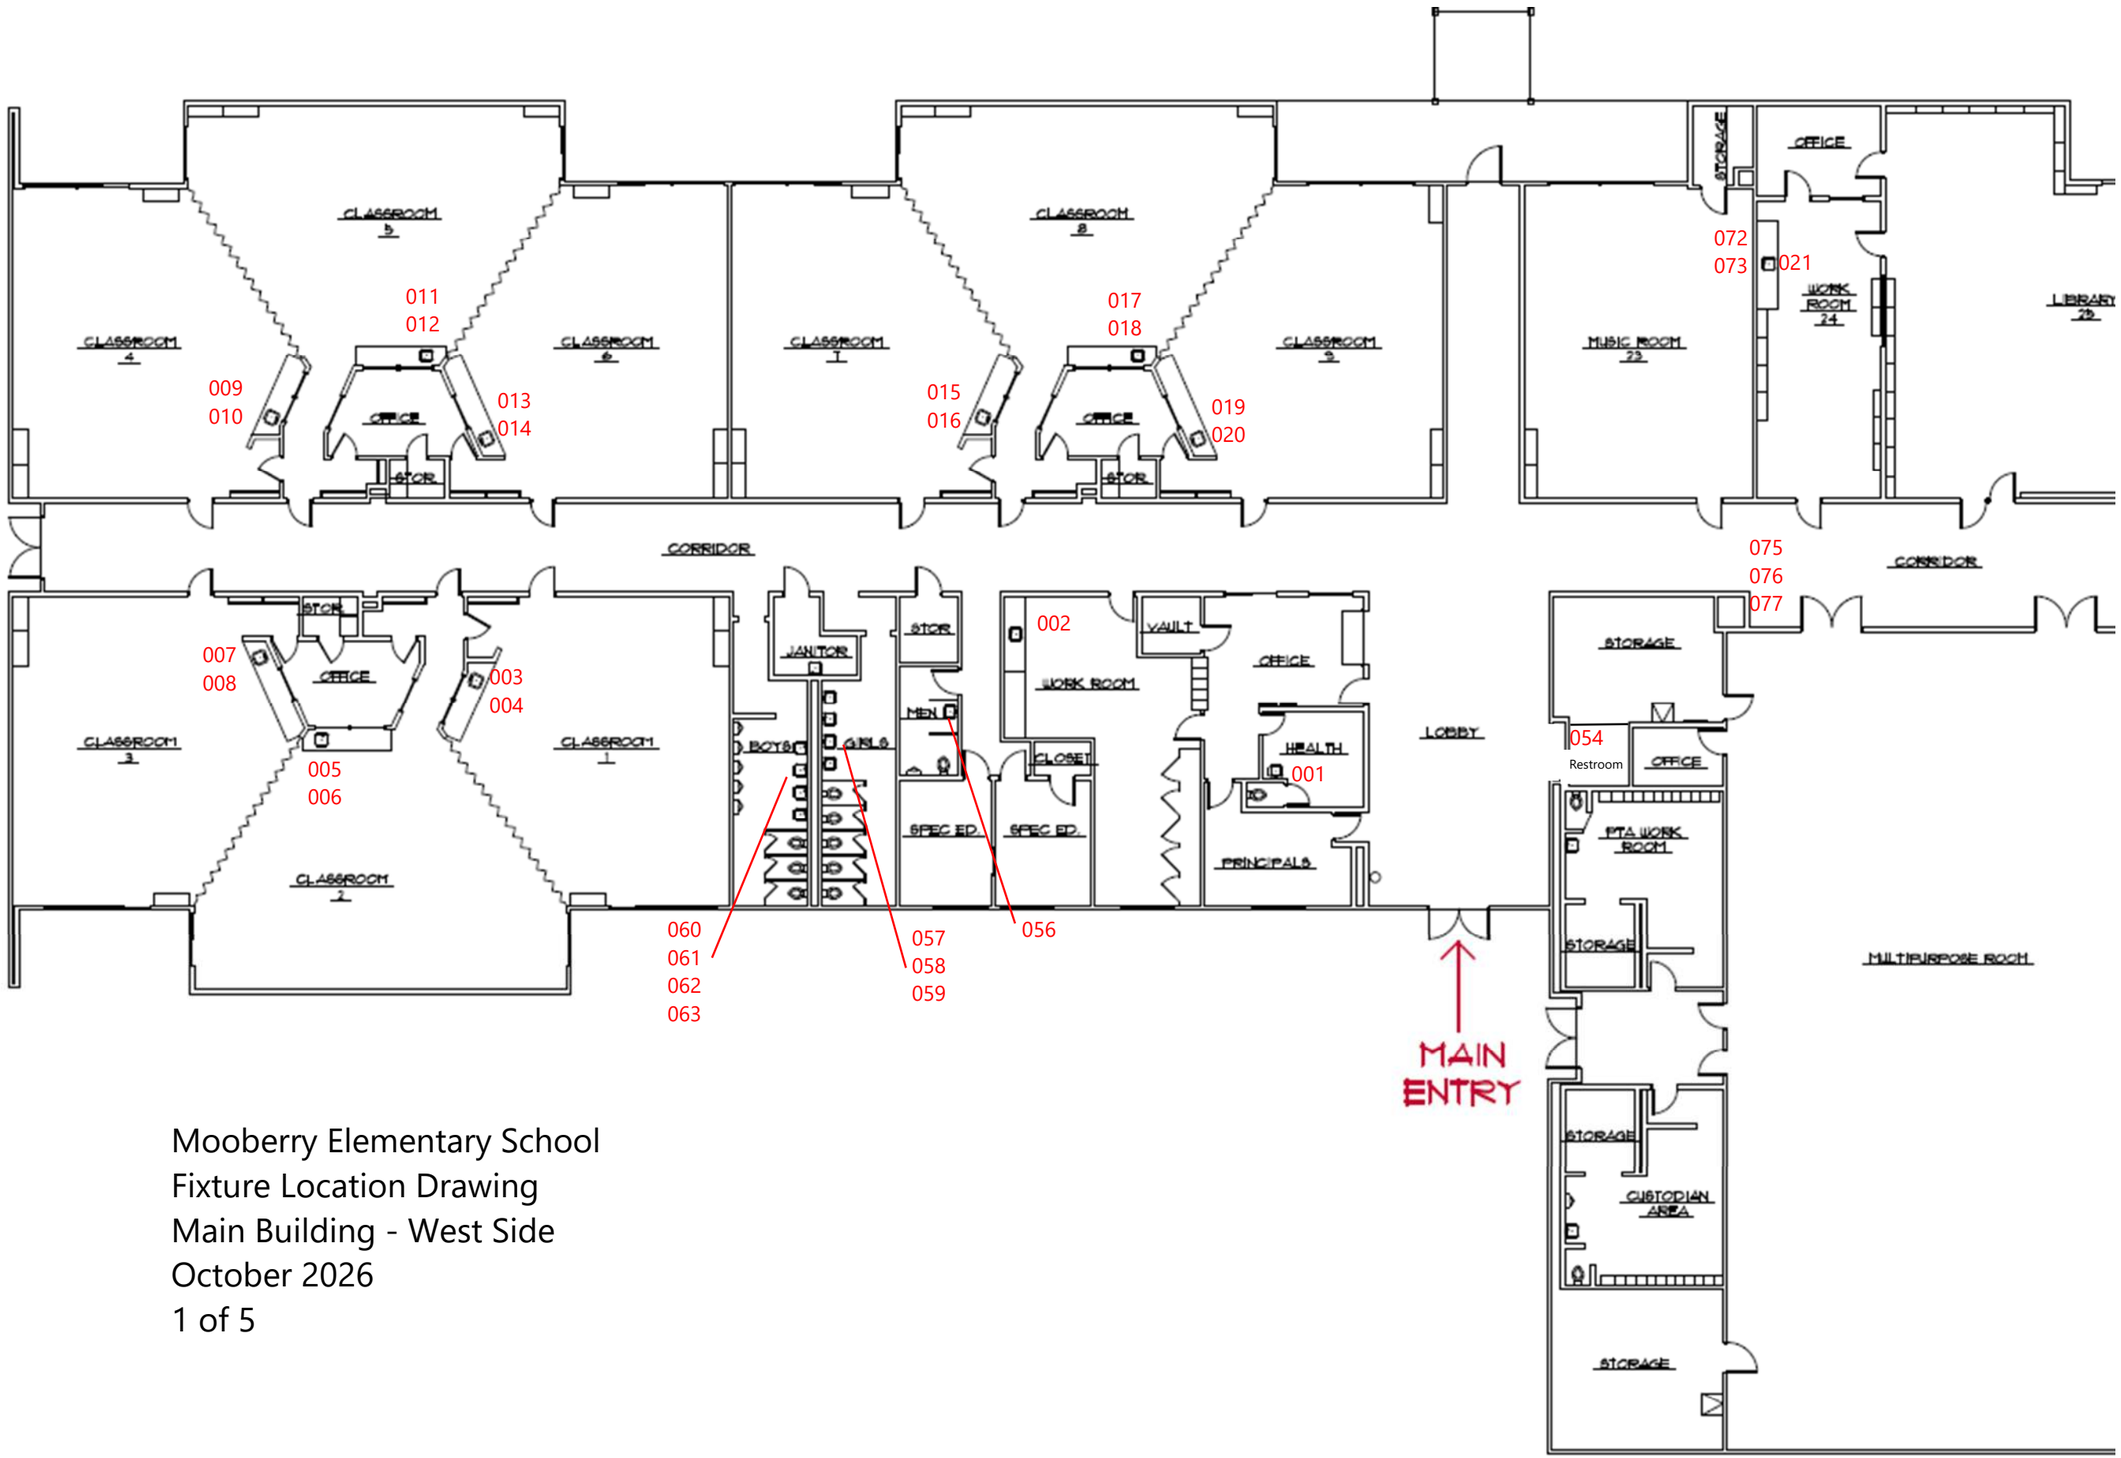


Mooberry Elementary School
Fixture Location Drawing
Main Building - West Side
October 2026
1 of 5

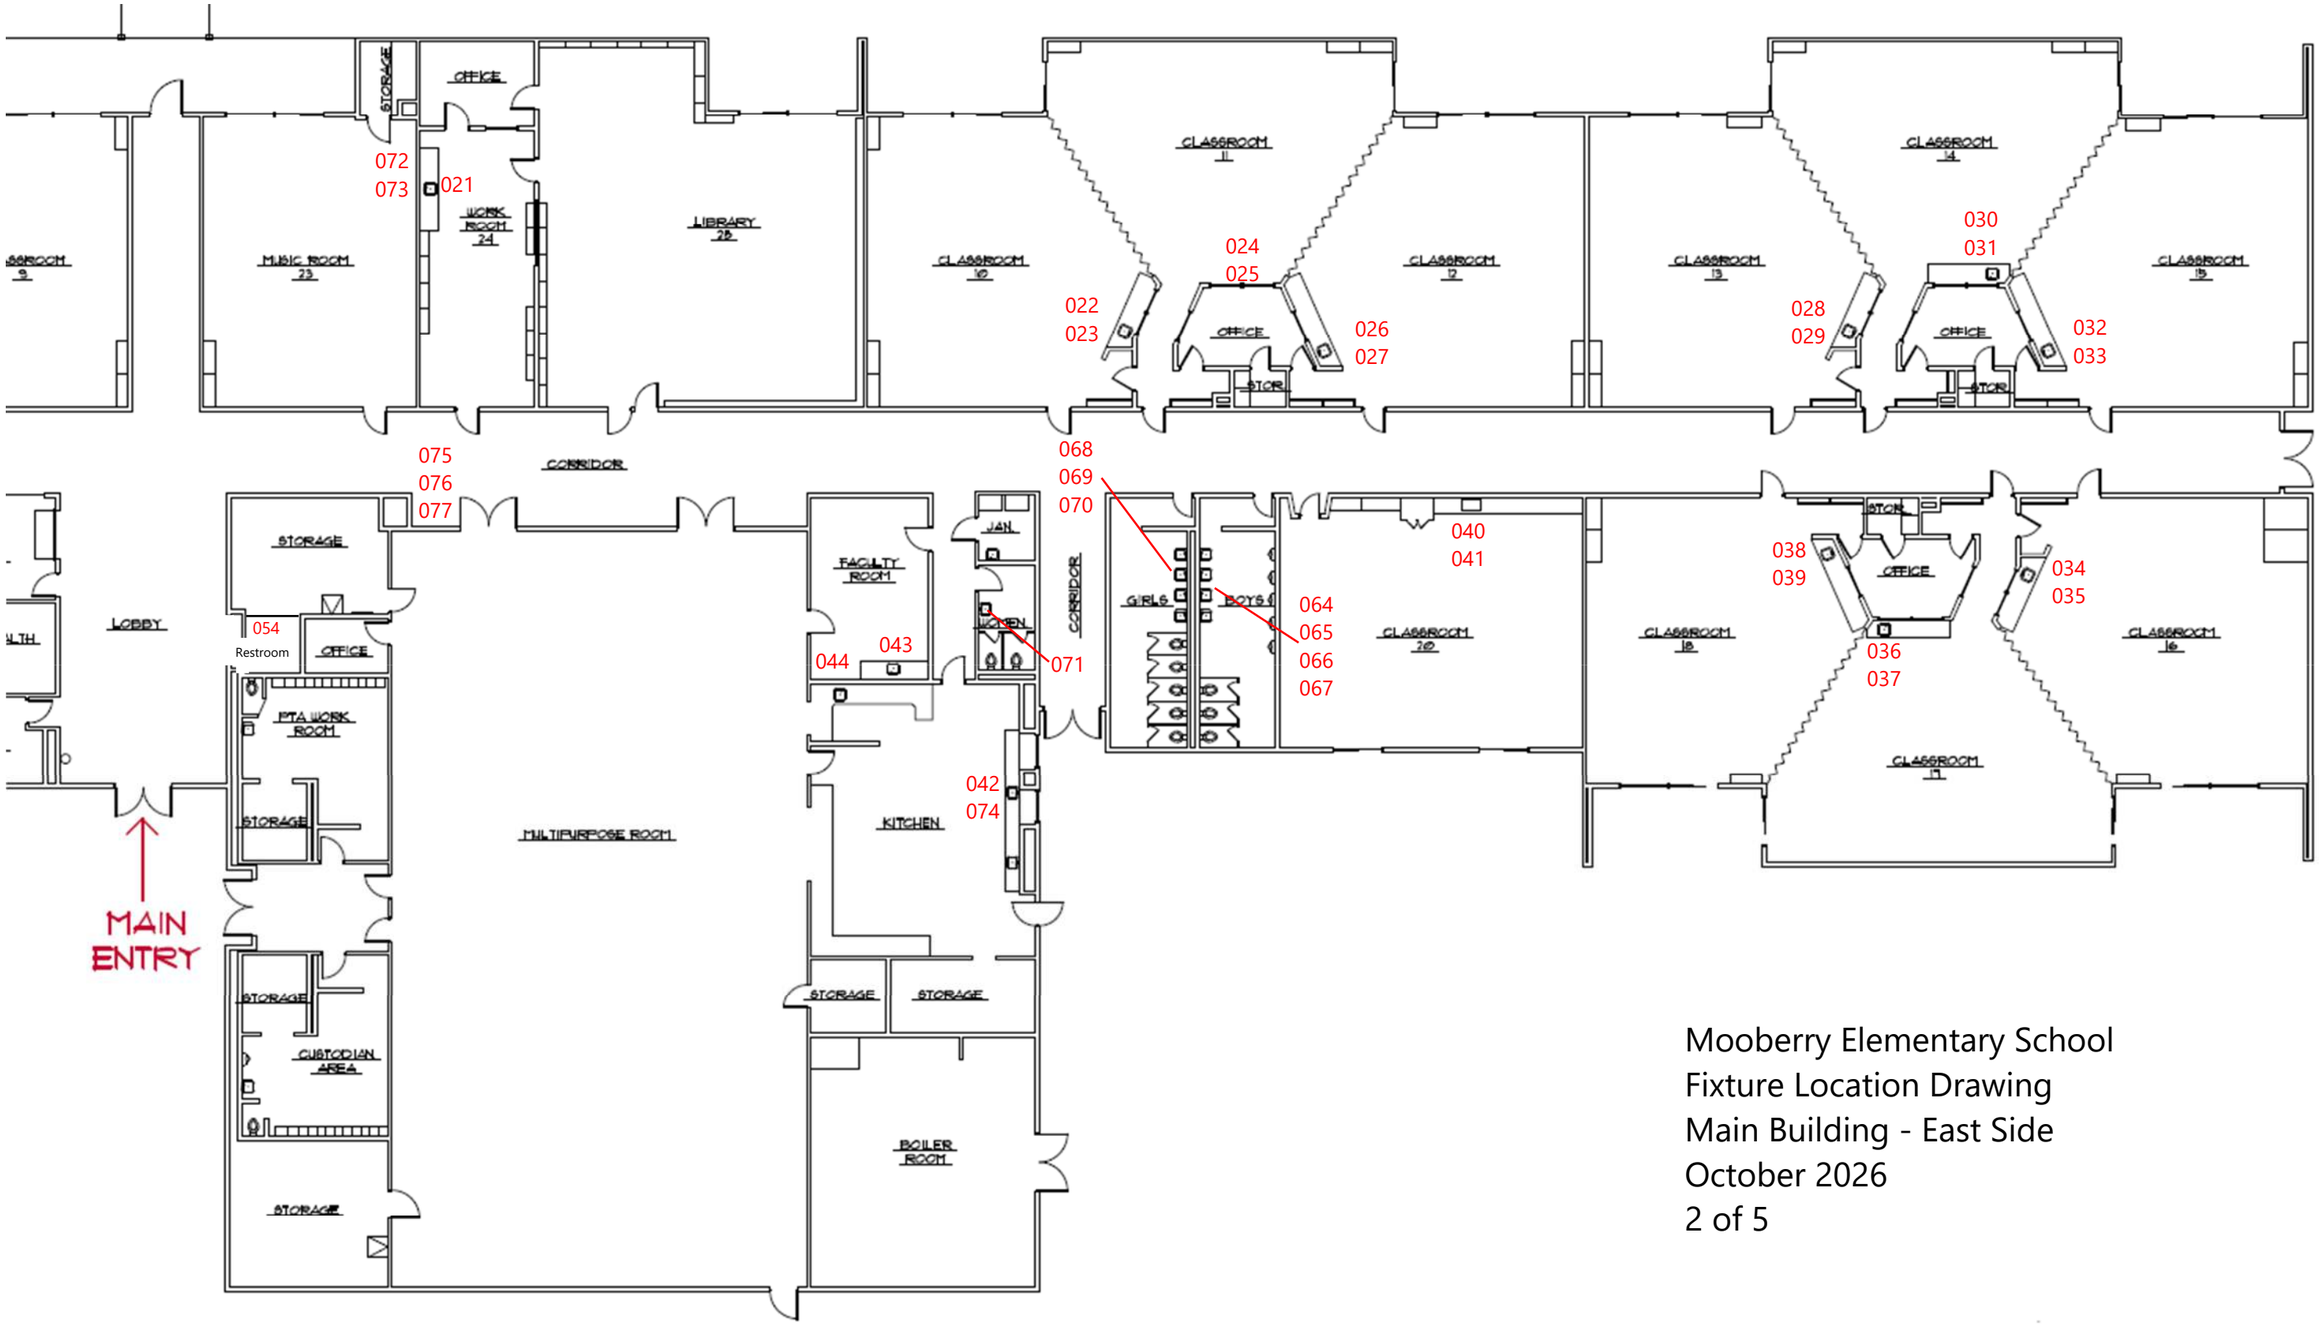

Mooberry Elementary School
Fixture Location Drawing
Main Building - East Side
October 2026
2 of 5

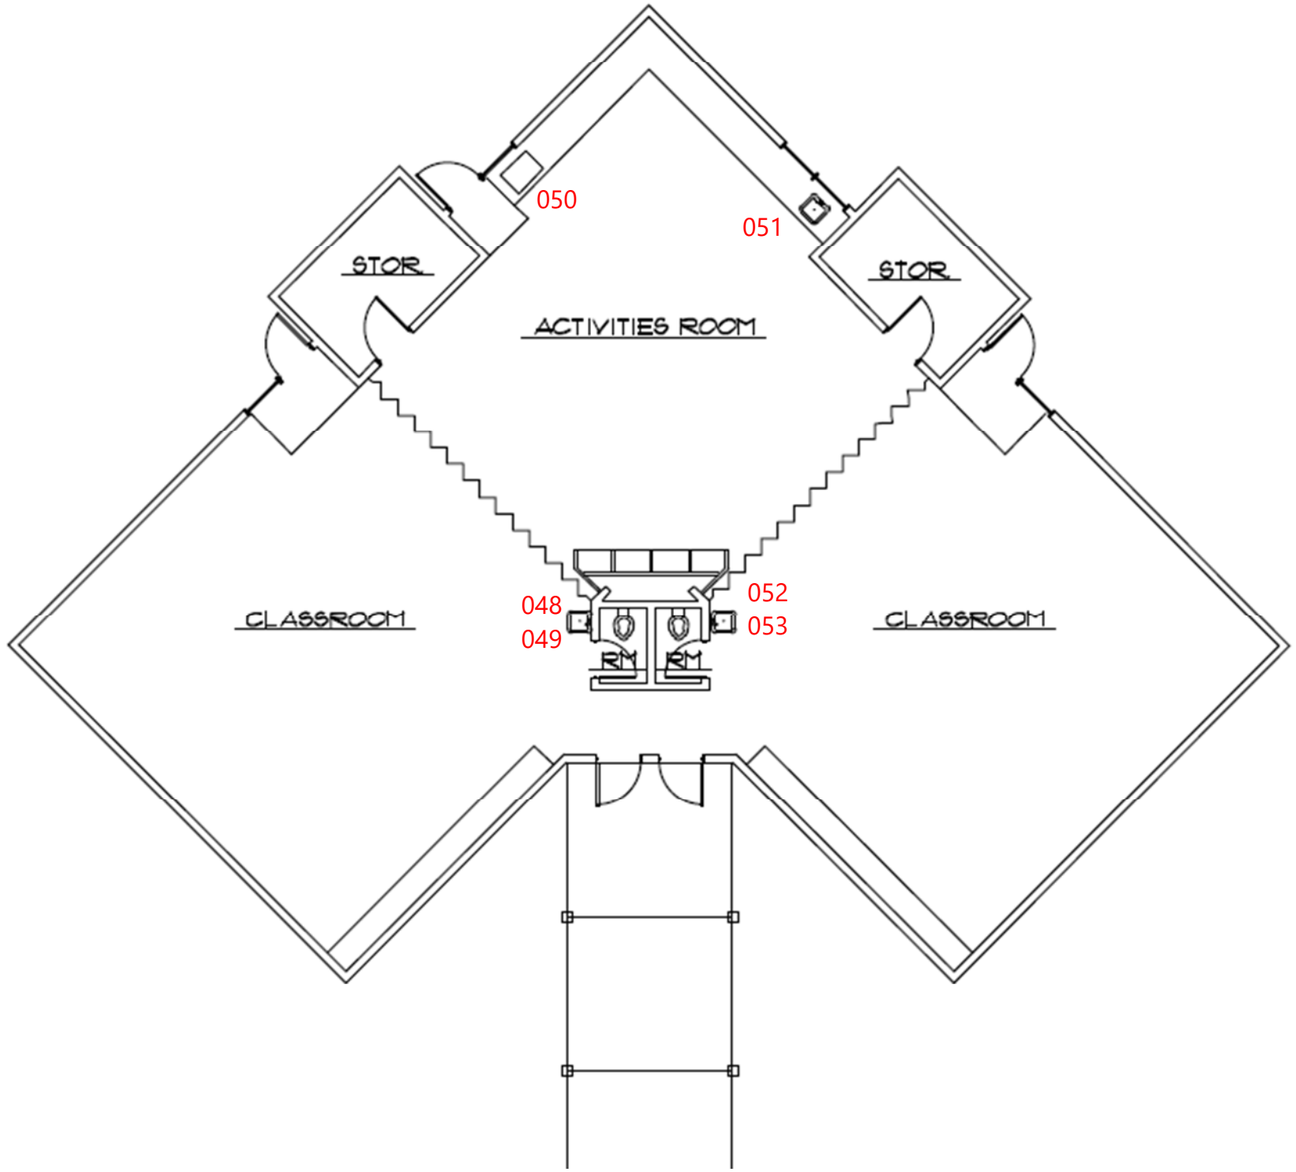


Mooberry Elementary School
Fixture Location Drawing
Kindergarten Pod
October 2026
3 of 5

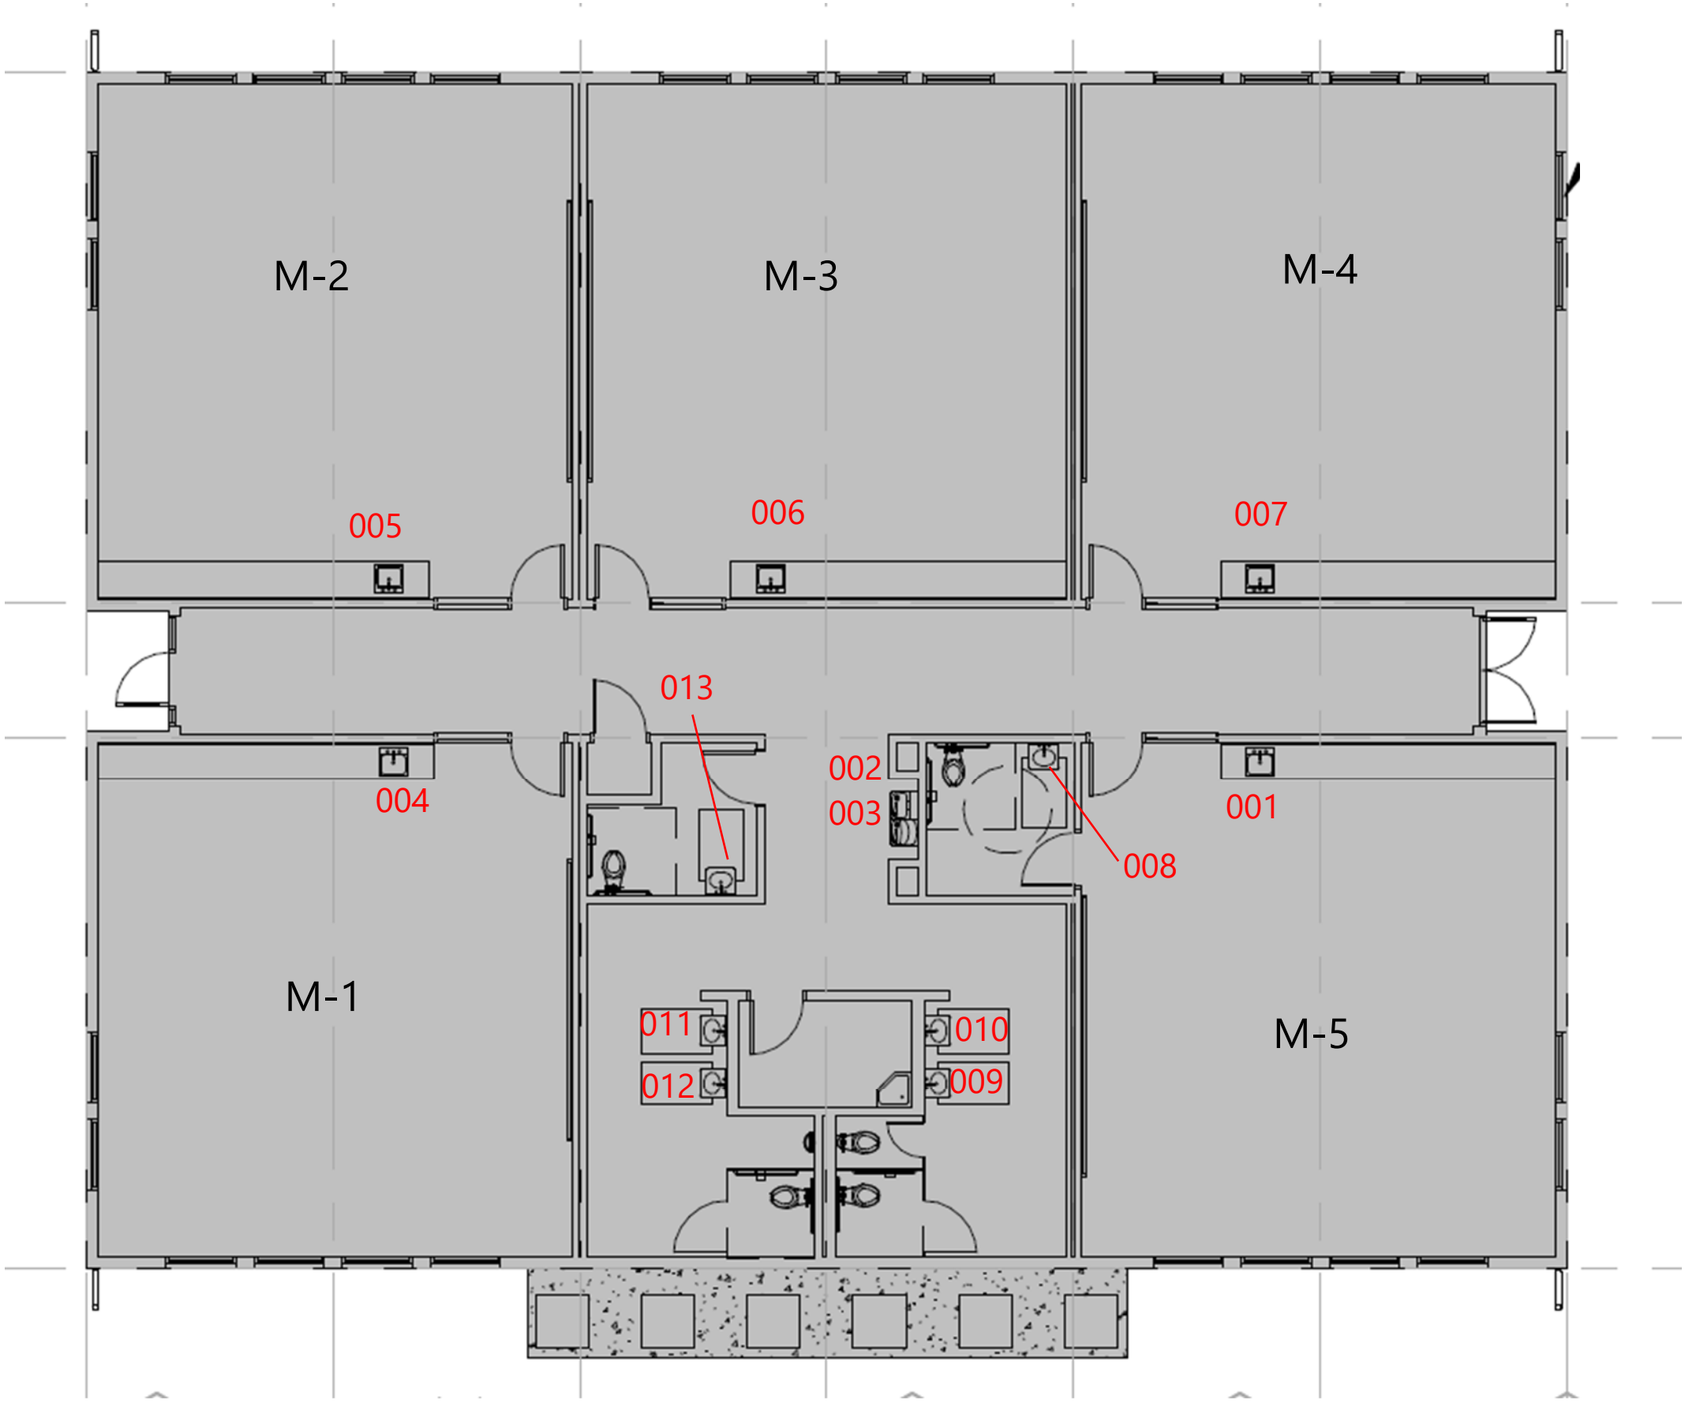

Mooberry Elementary School
Fixture Location Drawing
Modular Building
October 2026
4 of 5

Mooberry Elementary School
Fixture Location Drawing
Gymnasium
October 2026
5 of 5

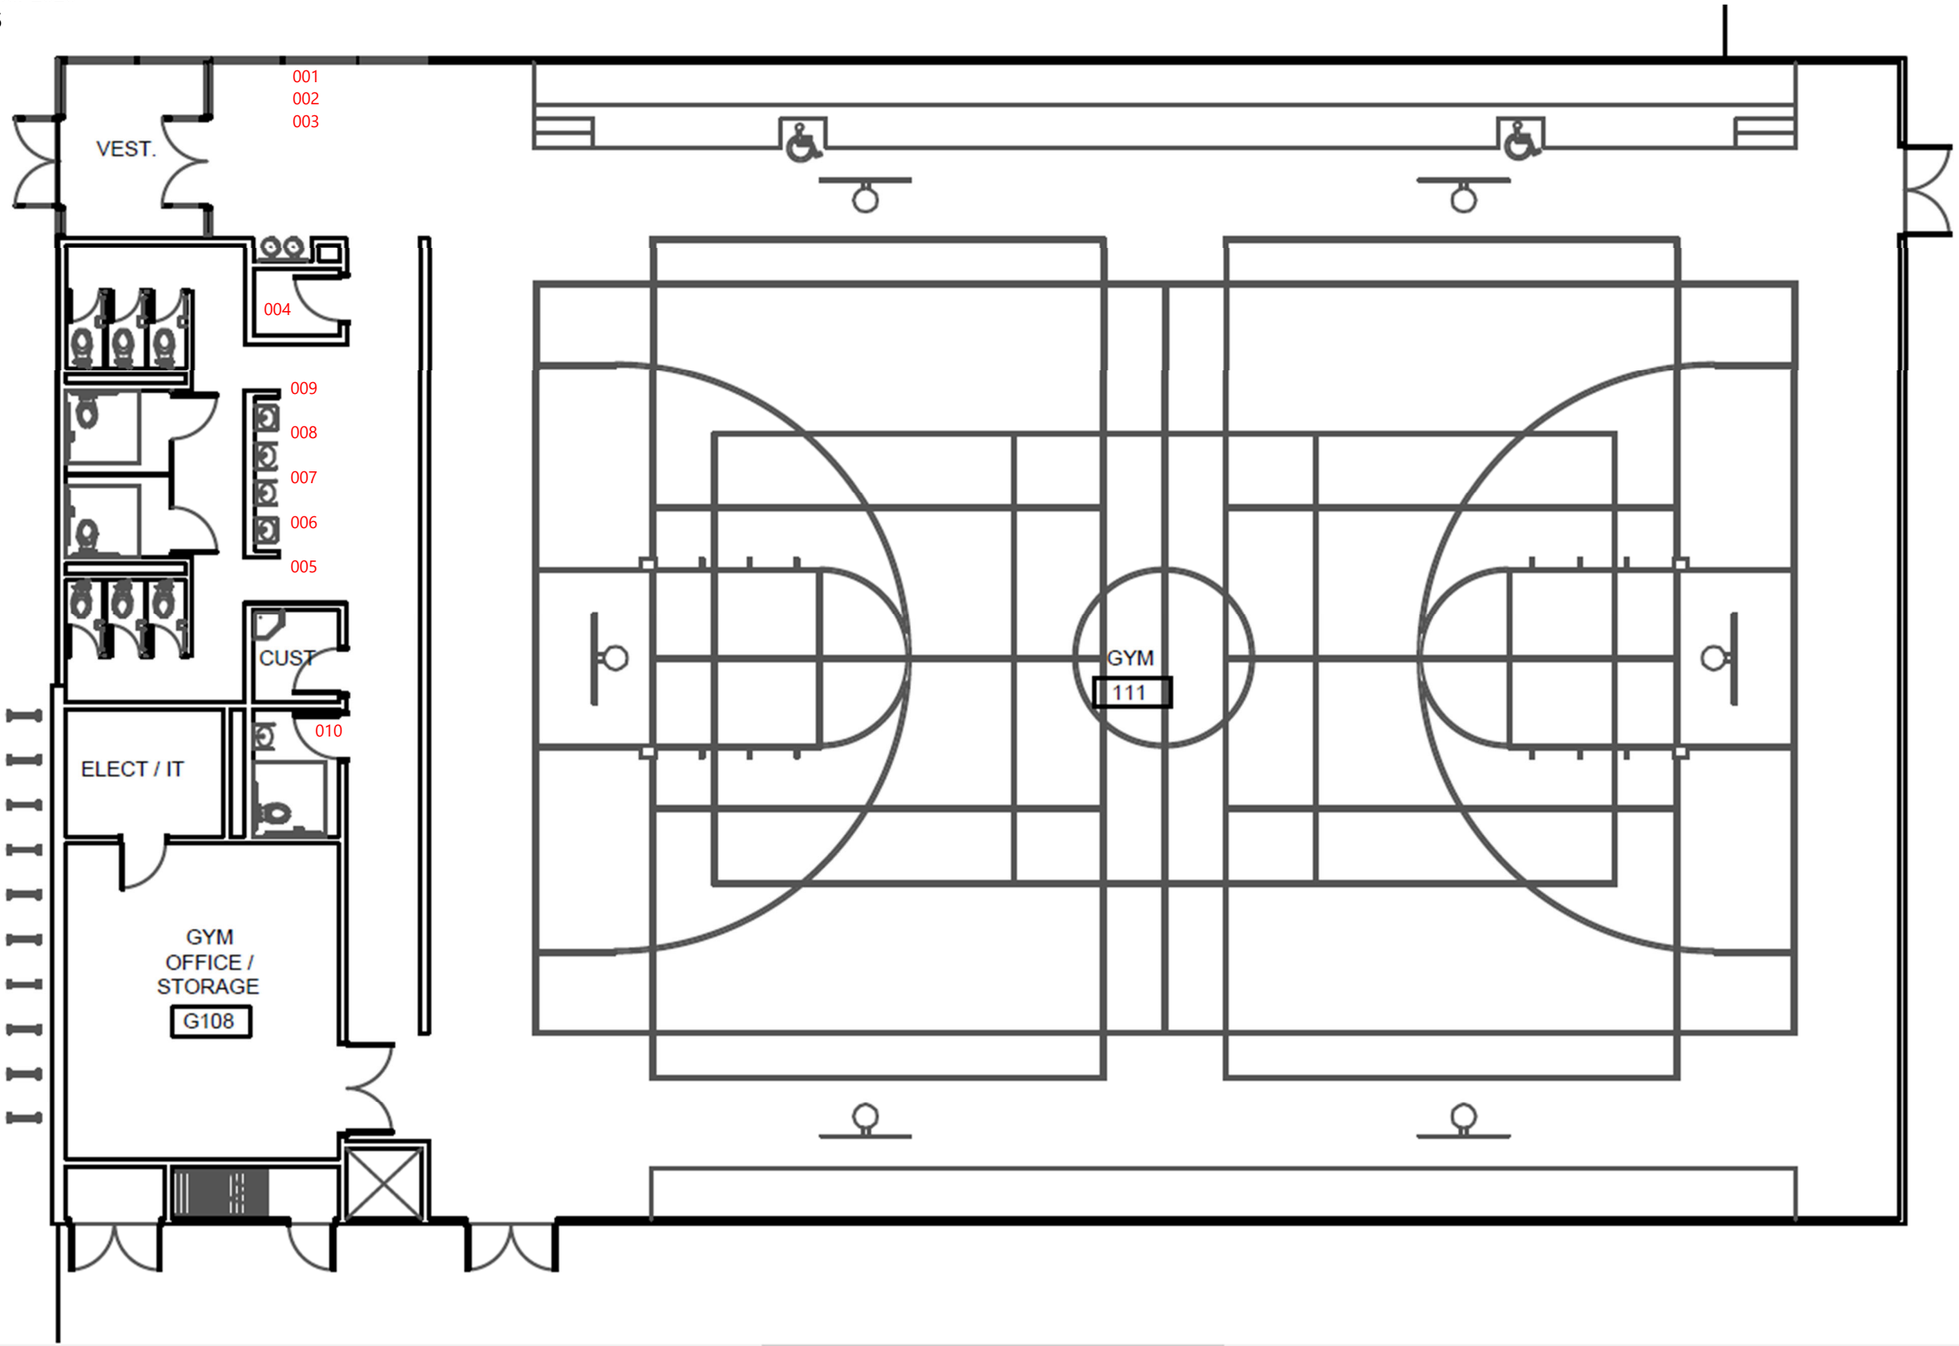

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Friday, October 2, 2026

Dale Voeller
Apex Companies, LLC - Portland
4412 S Corbett Ave
Portland, OR 97239

RE: A6I1622 - Hillsboro School District - Mooberry ES/26010605

Thank you for using Apex Laboratories. We greatly appreciate your business and strive to provide the highest quality services to the environmental industry.

Enclosed are the results of analyses for work order A6I1622, which was received by the laboratory on 9/21/2026 at 11:26:00AM.

If you have any questions concerning this report or the services we offer, please feel free to contact me by email at: jwoodcock@apex-labs.com, or by phone at 503-718-2323.

Please note: All samples will be disposed of within 30 days of sample receipt, unless prior arrangements have been made.

Cooler Receipt Information
Acceptable Receipt Temperature is less than, or equal to, 6 degC (not frozen), or received on ice the same day as sampling.
(See Cooler Receipt Form for details)
Default Cooler 5.1 degC

This Final Report is the official version of the data results for this sample submission, unless superseded by a subsequent, labeled amended report.
All other deliverables derived from this data, including Electronic Data Deliverables (EDDs), CLP-like forms, client requested summary sheets, and all other products are considered secondary to this report.

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

ANALYTICAL REPORT


Apex Companies, LLC - Portland	Project: Hillsboro School District	
4412 S Corbett Ave	Project Number: Mooberry ES/26010605	Report ID:
Portland, OR 97239	Project Manager: Dale Voeller	A6I1622 - 10 02 26 1015

ANALYTICAL REPORT FOR SAMPLES

SAMPLE INFORMATION

Client Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
22390700-001NS26A	A6I1622-01	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-002SF26A	A6I1622-02	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-003DW26A	A6I1622-03	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-004CF26A	A6I1622-04	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-005DW26A	A6I1622-05	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-006CF26A	A6I1622-06	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-007DW26A	A6I1622-07	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-008CF26A	A6I1622-08	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-009DW26A	A6I1622-09	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-010CF26A	A6I1622-10	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-011DW26A	A6I1622-11	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-012CF26A	A6I1622-12	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-013DW26A	A6I1622-13	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-014CF26A	A6I1622-14	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-015DW26A	A6I1622-15	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-016CF26A	A6I1622-16	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-017DW26A	A6I1622-17	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-018CF26A	A6I1622-18	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-019DW26A	A6I1622-19	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-020CF26A	A6I1622-20	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-021SF26A	A6I1622-21	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-022DW26A	A6I1622-22	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-023CF26A	A6I1622-23	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-024DW26A	A6I1622-24	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-025CF26A	A6I1622-25	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-026DW26A	A6I1622-26	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-027CF26A	A6I1622-27	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-028DW26A	A6I1622-28	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-029CF26A	A6I1622-29	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-030DW26A	A6I1622-30	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-031CF26A	A6I1622-31	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-032DW26A	A6I1622-32	Drinking Water	09/19/26 00:00	09/21/26 11:26

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

ANALYTICAL REPORT


Apex Companies, LLC - Portland	Project: Hillsboro School District	
4412 S Corbett Ave	Project Number: Mooberry ES/26010605	Report ID:
Portland, OR 97239	Project Manager: Dale Voeller	A6I1622 - 10 02 26 1015

ANALYTICAL REPORT FOR SAMPLES

SAMPLE INFORMATION

Client Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
22390700-033CF26A	A6I1622-33	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-034DW26A	A6I1622-34	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-035CF26A	A6I1622-35	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-036DW26A	A6I1622-36	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-037CF26A	A6I1622-37	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-038DW26A	A6I1622-38	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-039CF26A	A6I1622-39	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-040DW26A	A6I1622-40	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-041CF26A	A6I1622-41	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-042KF26A	A6I1622-42	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-043SF26A	A6I1622-43	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-044WC26A	A6I1622-44	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-048DW26A	A6I1622-45	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-049CF26A	A6I1622-46	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-050CF26A	A6I1622-47	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-051CF26A	A6I1622-48	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-052DW26A	A6I1622-49	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-053CF26A	A6I1622-50	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-054BF26A	A6I1622-51	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-056BF26A	A6I1622-52	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-057BF26A	A6I1622-53	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-058BF26A	A6I1622-54	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-059BF26A	A6I1622-55	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-060BF26A	A6I1622-56	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-061BF26A	A6I1622-57	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-062BF26A	A6I1622-58	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-063BF26A	A6I1622-59	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-064BF26A	A6I1622-60	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-065BF26A	A6I1622-61	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-066BF26A	A6I1622-62	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-067BF26A	A6I1622-63	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-068BF26A	A6I1622-64	Drinking Water	09/19/26 00:00	09/21/26 11:26

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6I1622 - 10 02 26 1015**

ANALYTICAL REPORT FOR SAMPLES

SAMPLE INFORMATION

Client Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
22390700-069BF26A	A6I1622-65	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-070BF26A	A6I1622-66	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-071BF26A	A6I1622-67	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-073CF26A	A6I1622-68	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-074KF26A	A6I1622-69	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-075WB26A	A6I1622-70	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-076DW26A	A6I1622-71	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390700-077DW26A	A6I1622-72	Drinking Water	09/19/26 00:00	09/21/26 11:26

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

APEX LABORATORIES

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT


Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6I1622 - 10 02 26 1015**

ANALYTICAL SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Sample Result	Detection Limit	Reporting Limit	Units	Dilution	Date Analyzed	Method Ref.	Notes
22390700-001NS26A (A6I1622-01)				**Matrix: Drinking Water**				
Batch: 26I0693								
Lead	ND	---	0.200	ug/L	1	09/29/26 12:46	EPA 200.8	
22390700-002SF26A (A6I1622-02)				**Matrix: Drinking Water**				
Batch: 26I0693								
Lead	**0.233**	---	0.200	ug/L	1	09/29/26 12:48	EPA 200.8	
22390700-003DW26A (A6I1622-03)				**Matrix: Drinking Water**				
Batch: 26I0693								
Lead	ND	---	0.200	ug/L	1	09/29/26 12:50	EPA 200.8	
22390700-004CF26A (A6I1622-04)				**Matrix: Drinking Water**				
Batch: 26I0693								
Lead	**0.676**	---	0.200	ug/L	1	09/29/26 12:56	EPA 200.8	
22390700-005DW26A (A6I1622-05)				**Matrix: Drinking Water**				
Batch: 26I0693								
Lead	ND	---	0.200	ug/L	1	09/29/26 12:58	EPA 200.8	
22390700-006CF26A (A6I1622-06)				**Matrix: Drinking Water**				
Batch: 26I0693								
Lead	ND	---	0.200	ug/L	1	09/29/26 13:00	EPA 200.8	
22390700-007DW26A (A6I1622-07)				**Matrix: Drinking Water**				
Batch: 26I0693								
Lead	ND	---	0.200	ug/L	1	09/29/26 13:02	EPA 200.8	
22390700-008CF26A (A6I1622-08)				**Matrix: Drinking Water**				
Batch: 26I0693								
Lead	ND	---	0.200	ug/L	1	09/29/26 13:04	EPA 200.8	
22390700-009DW26A (A6I1622-09)				**Matrix: Drinking Water**				
Batch: 26I0693								
Lead	ND	---	0.200	ug/L	1	09/29/26 13:06	EPA 200.8	

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

APEX LABORATORIES

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT


Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6I1622 - 10 02 26 1015**

ANALYTICAL SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Sample Result	Detection Limit	Reporting Limit	Units	Dilution	Date Analyzed	Method Ref.	Notes
22390700-010CF26A (A6I1622-10)				**Matrix: Drinking Water**				
Batch: 26I0693								
Lead	ND	---	0.200	ug/L	1	09/29/26 13:08	EPA 200.8	
22390700-011DW26A (A6I1622-11)				**Matrix: Drinking Water**				
Batch: 26I0693								
Lead	ND	---	0.200	ug/L	1	09/29/26 13:10	EPA 200.8	
22390700-012CF26A (A6I1622-12)				**Matrix: Drinking Water**				
Batch: 26I0693								
Lead	**0.613**	---	0.200	ug/L	1	09/29/26 13:12	EPA 200.8	
22390700-013DW26A (A6I1622-13)				**Matrix: Drinking Water**				
Batch: 26I0693								
Lead	**0.257**	---	0.200	ug/L	1	09/29/26 13:14	EPA 200.8	
22390700-014CF26A (A6I1622-14)				**Matrix: Drinking Water**				
Batch: 26I0693								
Lead	**0.674**	---	0.200	ug/L	1	09/29/26 13:20	EPA 200.8	
22390700-015DW26A (A6I1622-15)				**Matrix: Drinking Water**				
Batch: 26I0693								
Lead	ND	---	0.200	ug/L	1	09/29/26 13:22	EPA 200.8	
22390700-016CF26A (A6I1622-16)				**Matrix: Drinking Water**				
Batch: 26I0693								
Lead	ND	---	0.200	ug/L	1	09/29/26 13:24	EPA 200.8	
22390700-017DW26A (A6I1622-17)				**Matrix: Drinking Water**				
Batch: 26I0693								
Lead	**0.260**	---	0.200	ug/L	1	09/29/26 13:26	EPA 200.8	
22390700-018CF26A (A6I1622-18)				**Matrix: Drinking Water**				
Batch: 26I0712								
Lead	**0.905**	---	0.200	ug/L	1	09/29/26 13:34	EPA 200.8	

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

ANALYTICAL REPORT


Apex Companies, LLC - Portland	Project: Hillsboro School District	
4412 S Corbett Ave	Project Number: Mooberry ES/26010605	Report ID:
Portland, OR 97239	Project Manager: Dale Voeller	A6I1622 - 10 02 26 1015

ANALYTICAL SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Sample Result	Detection Limit	Reporting Limit	Units	Dilution	Date Analyzed	Method Ref.	Notes
22390700-019DW26A (A6I1622-19)				**Matrix: Drinking Water**				
Batch: 26I0712								
Lead	ND	---	0.200	ug/L	1	09/29/26 13:44	EPA 200.8	
22390700-020CF26A (A6I1622-20)				**Matrix: Drinking Water**				
Batch: 26I0712								
Lead	ND	---	0.200	ug/L	1	09/29/26 13:46	EPA 200.8	
22390700-021SF26A (A6I1622-21)				**Matrix: Drinking Water**				
Batch: 26I0712								
Lead	ND	---	0.200	ug/L	1	09/29/26 13:48	EPA 200.8	
22390700-022DW26A (A6I1622-22)				**Matrix: Drinking Water**				
Batch: 26I0712								
Lead	ND	---	0.200	ug/L	1	09/29/26 13:50	EPA 200.8	
22390700-023CF26A (A6I1622-23)				**Matrix: Drinking Water**				
Batch: 26I0712								
Lead	**0.382**	---	0.200	ug/L	1	09/29/26 13:52	EPA 200.8	
22390700-024DW26A (A6I1622-24)				**Matrix: Drinking Water**				
Batch: 26I0712								
Lead	ND	---	0.200	ug/L	1	09/29/26 13:54	EPA 200.8	
22390700-025CF26A (A6I1622-25)				**Matrix: Drinking Water**				
Batch: 26I0712								
Lead	ND	---	0.200	ug/L	1	09/29/26 13:56	EPA 200.8	
22390700-026DW26A (A6I1622-26)				**Matrix: Drinking Water**				
Batch: 26I0712								
Lead	ND	---	0.200	ug/L	1	09/29/26 13:58	EPA 200.8	
22390700-027CF26A (A6I1622-27)				**Matrix: Drinking Water**				
Batch: 26I0712								
Lead	ND	---	0.200	ug/L	1	09/29/26 14:00	EPA 200.8	

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

APEX LABORATORIES

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT


Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6I1622 - 10 02 26 1015**

ANALYTICAL SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Sample Result	Detection Limit	Reporting Limit	Units	Dilution	Date Analyzed	Method Ref.	Notes
22390700-028DW26A (A6I1622-28)				**Matrix: Drinking Water**				
Batch: 26I0712								
Lead	ND	---	0.200	ug/L	1	09/29/26 14:02	EPA 200.8	
22390700-029CF26A (A6I1622-29)				**Matrix: Drinking Water**				
Batch: 26I0712								
Lead	ND	---	0.200	ug/L	1	09/29/26 14:08	EPA 200.8	
22390700-030DW26A (A6I1622-30)				**Matrix: Drinking Water**				
Batch: 26I0712								
Lead	ND	---	0.200	ug/L	1	09/29/26 14:10	EPA 200.8	
22390700-031CF26A (A6I1622-31)				**Matrix: Drinking Water**				
Batch: 26I0712								
Lead	**0.249**	---	0.200	ug/L	1	09/29/26 14:12	EPA 200.8	
22390700-032DW26A (A6I1622-32)				**Matrix: Drinking Water**				
Batch: 26I0712								
Lead	ND	---	0.200	ug/L	1	09/29/26 14:14	EPA 200.8	
22390700-033CF26A (A6I1622-33)				**Matrix: Drinking Water**				
Batch: 26I0712								
Lead	ND	---	0.200	ug/L	1	09/29/26 14:16	EPA 200.8	
22390700-034DW26A (A6I1622-34)				**Matrix: Drinking Water**				
Batch: 26I0712								
Lead	ND	---	0.200	ug/L	1	09/29/26 14:18	EPA 200.8	
22390700-035CF26A (A6I1622-35)				**Matrix: Drinking Water**				
Batch: 26I0712								
Lead	ND	---	0.200	ug/L	1	09/29/26 14:20	EPA 200.8	
22390700-036DW26A (A6I1622-36)				**Matrix: Drinking Water**				
Batch: 26I0712								
Lead	**0.335**	---	0.200	ug/L	1	09/29/26 14:22	EPA 200.8	

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

APEX LABORATORIES

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT


Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6I1622 - 10 02 26 1015**

ANALYTICAL SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Sample Result	Detection Limit	Reporting Limit	Units	Dilution	Date Analyzed	Method Ref.	Notes
22390700-037CF26A (A6I1622-37)				**Matrix: Drinking Water**				
Batch: 26I0712								
Lead	**0.331**	---	0.200	ug/L	1	09/29/26 14:24	EPA 200.8	
22390700-038DW26A (A6I1622-38)				**Matrix: Drinking Water**				
Batch: 26I0729								
Lead	ND	---	0.200	ug/L	1	09/29/26 14:36	EPA 200.8	
22390700-039CF26A (A6I1622-39)				**Matrix: Drinking Water**				
Batch: 26I0729								
Lead	ND	---	0.200	ug/L	1	09/29/26 14:42	EPA 200.8	
22390700-040DW26A (A6I1622-40)				**Matrix: Drinking Water**				
Batch: 26I0729								
Lead	**0.552**	---	0.200	ug/L	1	09/29/26 14:44	EPA 200.8	
22390700-041CF26A (A6I1622-41)				**Matrix: Drinking Water**				
Batch: 26I0729								
Lead	**0.386**	---	0.200	ug/L	1	09/29/26 14:46	EPA 200.8	
22390700-042KF26A (A6I1622-42)				**Matrix: Drinking Water**				
Batch: 26I0729								
Lead	ND	---	0.200	ug/L	1	09/29/26 14:48	EPA 200.8	
22390700-043SF26A (A6I1622-43)				**Matrix: Drinking Water**				
Batch: 26I0729								
Lead	ND	---	0.200	ug/L	1	09/29/26 14:50	EPA 200.8	
22390700-044WC26A (A6I1622-44)				**Matrix: Drinking Water**				
Batch: 26I0729								
Lead	ND	---	0.200	ug/L	1	09/29/26 14:56	EPA 200.8	
22390700-048DW26A (A6I1622-45)				**Matrix: Drinking Water**				
Batch: 26I0729								
Lead	**1.06**	---	0.200	ug/L	1	09/29/26 14:58	EPA 200.8	

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

APEX LABORATORIES

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT


Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6I1622 - 10 02 26 1015**

ANALYTICAL SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Sample Result	Detection Limit	Reporting Limit	Units	Dilution	Date Analyzed	Method Ref.	Notes
22390700-049CF26A (A6I1622-46)				**Matrix: Drinking Water**				
Batch: 26I0729								
Lead	ND	---	0.200	ug/L	1	09/29/26 15:00	EPA 200.8	
22390700-050CF26A (A6I1622-47)				**Matrix: Drinking Water**				
Batch: 26I0729								
Lead	**0.465**	---	0.200	ug/L	1	09/29/26 15:02	EPA 200.8	
22390700-051CF26A (A6I1622-48)				**Matrix: Drinking Water**				
Batch: 26I0729								
Lead	**4.33**	---	0.200	ug/L	1	09/29/26 15:04	EPA 200.8	
22390700-052DW26A (A6I1622-49)				**Matrix: Drinking Water**				
Batch: 26I0729								
Lead	**1.23**	---	0.200	ug/L	1	09/29/26 15:06	EPA 200.8	
22390700-053CF26A (A6I1622-50)				**Matrix: Drinking Water**				
Batch: 26I0729								
Lead	**1.20**	---	0.200	ug/L	1	09/29/26 15:08	EPA 200.8	
22390700-054BF26A (A6I1622-51)				**Matrix: Drinking Water**				
Batch: 26I0729								
Lead	ND	---	0.200	ug/L	1	09/29/26 15:10	EPA 200.8	
22390700-056BF26A (A6I1622-52)				**Matrix: Drinking Water**				
Batch: 26I0729								
Lead	ND	---	0.200	ug/L	1	09/29/26 15:12	EPA 200.8	
22390700-057BF26A (A6I1622-53)				**Matrix: Drinking Water**				
Batch: 26I0729								
Lead	**0.244**	---	0.200	ug/L	1	09/29/26 15:14	EPA 200.8	
22390700-058BF26A (A6I1622-54)				**Matrix: Drinking Water**				
Batch: 26I0729								
Lead	ND	---	0.200	ug/L	1	09/29/26 15:20	EPA 200.8	

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

ANALYTICAL REPORT


Apex Companies, LLC - Portland	Project: Hillsboro School District	
4412 S Corbett Ave	Project Number: Mooberry ES/26010605	Report ID:
Portland, OR 97239	Project Manager: Dale Voeller	A6I1622 - 10 02 26 1015

ANALYTICAL SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Sample Result	Detection Limit	Reporting Limit	Units	Dilution	Date Analyzed	Method Ref.	Notes
22390700-059BF26A (A6I1622-55)				**Matrix: Drinking Water**				
Batch: 26I0729								
Lead	ND	---	0.200	ug/L	1	09/29/26 15:22	EPA 200.8	
22390700-060BF26A (A6I1622-56)				**Matrix: Drinking Water**				
Batch: 26I0729								
Lead	ND	---	0.200	ug/L	1	09/29/26 15:24	EPA 200.8	
22390700-061BF26A (A6I1622-57)				**Matrix: Drinking Water**				
Batch: 26I0729								
Lead	ND	---	0.200	ug/L	1	09/29/26 15:26	EPA 200.8	
22390700-062BF26A (A6I1622-58)				**Matrix: Drinking Water**				
Batch: 26I0789								
Lead	ND	---	0.200	ug/L	1	09/29/26 16:06	EPA 200.8	
22390700-063BF26A (A6I1622-59)				**Matrix: Drinking Water**				
Batch: 26I0789								
Lead	ND	---	0.200	ug/L	1	09/29/26 16:12	EPA 200.8	
22390700-064BF26A (A6I1622-60)				**Matrix: Drinking Water**				
Batch: 26I0789								
Lead	ND	---	0.200	ug/L	1	09/29/26 16:14	EPA 200.8	
22390700-065BF26A (A6I1622-61)				**Matrix: Drinking Water**				
Batch: 26I0789								
Lead	ND	---	0.200	ug/L	1	09/29/26 16:16	EPA 200.8	
22390700-066BF26A (A6I1622-62)				**Matrix: Drinking Water**				
Batch: 26I0789								
Lead	ND	---	0.200	ug/L	1	09/29/26 16:18	EPA 200.8	
22390700-067BF26A (A6I1622-63)				**Matrix: Drinking Water**				
Batch: 26I0789								
Lead	ND	---	0.200	ug/L	1	09/29/26 16:20	EPA 200.8	

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

ANALYTICAL REPORT


Apex Companies, LLC - Portland	Project: Hillsboro School District	
4412 S Corbett Ave	Project Number: Mooberry ES/26010605	Report ID:
Portland, OR 97239	Project Manager: Dale Voeller	A6I1622 - 10 02 26 1015

ANALYTICAL SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Sample Result	Detection Limit	Reporting Limit	Units	Dilution	Date Analyzed	Method Ref.	Notes
22390700-068BF26A (A6I1622-64)				**Matrix: Drinking Water**				
Batch: 26I0789								
Lead	ND	---	0.200	ug/L	1	09/29/26 16:27	EPA 200.8	
22390700-069BF26A (A6I1622-65)				**Matrix: Drinking Water**				
Batch: 26I0789								
Lead	ND	---	0.200	ug/L	1	09/29/26 16:29	EPA 200.8	
22390700-070BF26A (A6I1622-66)				**Matrix: Drinking Water**				
Batch: 26I0789								
Lead	ND	---	0.200	ug/L	1	09/29/26 16:31	EPA 200.8	
22390700-071BF26A (A6I1622-67)				**Matrix: Drinking Water**				
Batch: 26I0789								
Lead	ND	---	0.200	ug/L	1	09/29/26 16:33	EPA 200.8	
22390700-073CF26A (A6I1622-68)				**Matrix: Drinking Water**				
Batch: 26I0789								
Lead	**2.71**	---	0.200	ug/L	1	09/29/26 16:35	EPA 200.8	
22390700-074KF26A (A6I1622-69)				**Matrix: Drinking Water**				
Batch: 26I0789								
Lead	ND	---	0.200	ug/L	1	09/29/26 16:37	EPA 200.8	
22390700-075WB26A (A6I1622-70)				**Matrix: Drinking Water**				
Batch: 26I0789								
Lead	ND	---	0.200	ug/L	1	09/29/26 16:39	EPA 200.8	
22390700-076DW26A (A6I1622-71)				**Matrix: Drinking Water**				
Batch: 26I0789								
Lead	ND	---	0.200	ug/L	1	09/29/26 16:41	EPA 200.8	
22390700-077DW26A (A6I1622-72)				**Matrix: Drinking Water**				
Batch: 26I0789								
Lead	ND	---	0.200	ug/L	1	09/29/26 16:43	EPA 200.8	

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

APEX LABORATORIES

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT


Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6I1622 - 10 02 26 1015**

QUALITY CONTROL (QC) SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Result	Detection Limit	Reporting Limit	Units	Dilution	Spike Amount	Source Result	% REC	% REC Limits	RPD	RPD Limit	Notes
Batch 26I0693 - EPA 200.8 Direct Analysis												**Drinking Water**
Blank (26I0693-BLK1)		Prepared: 09/23/26 12:11		Analyzed: 09/29/26 12:32								
EPA 200.8												
Lead	ND	---	0.200	ug/L	1	---	---	---	---	---	---	
LCS (26I0693-BS1)		Prepared: 09/23/26 12:11		Analyzed: 09/29/26 12:34								
EPA 200.8												
Lead	15.3	---	0.201	ug/L	1	15.0	---	102	85 - 115%	---	---	
Matrix Spike (26I0693-MS2)		Prepared: 09/23/26 12:11		Analyzed: 09/29/26 13:28								
QC Source Sample: 22390700-017DW26A (A6I1622-17)												
EPA 200.8												
Lead	15.9	---	0.201	ug/L	1	15.0	0.260	104	70 - 130%	---	---	
Batch 26I0712 - EPA 200.8 Direct Analysis												**Drinking Water**
Blank (26I0712-BLK1)		Prepared: 09/24/26 07:54		Analyzed: 09/29/26 13:30								
EPA 200.8												
Lead	ND	---	0.200	ug/L	1	---	---	---	---	---	---	
LCS (26I0712-BS1)		Prepared: 09/24/26 07:54		Analyzed: 09/29/26 13:32								
EPA 200.8												
Lead	15.5	---	0.201	ug/L	1	15.0	---	104	85 - 115%	---	---	
Duplicate (26I0712-DUP1)		Prepared: 09/24/26 07:54		Analyzed: 09/29/26 13:36								
QC Source Sample: 22390700-018CF26A (A6I1622-18)												
EPA 200.8												
Lead	**0.874**	---	0.200	ug/L	1	---	0.905	---	---	4	20%	
Matrix Spike (26I0712-MS1)		Prepared: 09/24/26 07:54		Analyzed: 09/29/26 13:38								
QC Source Sample: 22390700-018CF26A (A6I1622-18)												
EPA 200.8												
Lead	16.2	---	0.201	ug/L	1	15.0	0.905	102	70 - 130%	---	---	
Matrix Spike (26I0712-MS2)		Prepared: 09/24/26 07:54		Analyzed: 09/29/26 14:26								
QC Source Sample: 22390700-037CF26A (A6I1622-37)												

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6I1622 - 10 02 26 1015**

QUALITY CONTROL (QC) SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Result	Detection Limit	Reporting Limit	Units	Dilution	Spike Amount	Source Result	% REC	% REC Limits	RPD	RPD Limit	Notes
Batch 26I0712 - EPA 200.8 Direct Analysis											**Drinking Water**	
Matrix Spike (26I0712-MS2)		Prepared: 09/24/26 07:54		Analyzed: 09/29/26 14:26								
QC Source Sample: 22390700-037CF26A (A6I1622-37)												
EPA 200.8												
Lead	15.7	---	0.201	ug/L	1	15.0	0.331	102	70 - 130%	---	---	

Apex Laboratories

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Jason Woodcock, Project Manager

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project:	Hillsboro School District
4412 S Corbett Ave	Project Number:	Mooberry ES/26010605
Portland, OR 97239	Project Manager:	Dale Voeller


Report ID:
A6I1622 - 10 02 26 1015

QUALITY CONTROL (QC) SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Result	Detection Limit	Reporting Limit	Units	Dilution	Spike Amount	Source Result	% REC	% REC Limits	RPD	RPD Limit	Notes
Batch 26I0729 - EPA 200.8 Direct Analysis											Drinking Water	
Blank (26I0729-BLK1)		Prepared: 09/24/26 10:33		Analyzed: 09/29/26 14:32								
EPA 200.8												
Lead	ND	---	0.200	ug/L	1	---	---	---	---	---	---	
LCS (26I0729-BS1)		Prepared: 09/24/26 10:33		Analyzed: 09/29/26 14:34								
EPA 200.8												
Lead	15.7	---	0.201	ug/L	1	15.0	---	105	85 - 115%	---	---	
Duplicate (26I0729-DUP1)		Prepared: 09/24/26 10:33		Analyzed: 09/29/26 14:38								
QC Source Sample: 22390700-038DW26A (A6I1622-38)												
EPA 200.8												
Lead	ND	---	0.200	ug/L	1	---	0.135	---	---	***	20%	
Matrix Spike (26I0729-MS1)		Prepared: 09/24/26 10:33		Analyzed: 09/29/26 14:40								
QC Source Sample: 22390700-038DW26A (A6I1622-38)												
EPA 200.8												
Lead	15.6	---	0.201	ug/L	1	15.0	0.135	103	70 - 130%	---	---	
Matrix Spike (26I0729-MS2)		Prepared: 09/24/26 10:33		Analyzed: 09/29/26 15:28								
QC Source Sample: 22390700-061BF26A (A6I1622-57)												
EPA 200.8												
Lead	15.5	---	0.201	ug/L	1	15.0	ND	103	70 - 130%	---	---	

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project:	Hillsboro School District
4412 S Corbett Ave	Project Number:	Mooberry ES/26010605
Portland, OR 97239	Project Manager:	Dale Voeller


Report ID:
A6I1622 - 10 02 26 1015

QUALITY CONTROL (QC) SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Result	Detection Limit	Reporting Limit	Units	Dilution	Spike Amount	Source Result	% REC	% REC Limits	RPD	RPD Limit	Notes
Batch 26I0789 - EPA 200.8 Direct Analysis											Drinking Water	
Blank (26I0789-BLK1)		Prepared: 09/25/26 14:00		Analyzed: 09/29/26 16:02								
EPA 200.8												
Lead	ND	---	0.200	ug/L	1	---	---	---	---	---	---	
LCS (26I0789-BS1)		Prepared: 09/25/26 14:00		Analyzed: 09/29/26 16:04								
EPA 200.8												
Lead	16.2	---	0.201	ug/L	1	15.0	---	108	85 - 115%	---	---	
Duplicate (26I0789-DUP1)		Prepared: 09/25/26 14:00		Analyzed: 09/29/26 16:08								
QC Source Sample: 22390700-062BF26A (A6I1622-58)												
EPA 200.8												
Lead	ND	---	0.200	ug/L	1	---	ND	---	---	---	20%	
Matrix Spike (26I0789-MS1)		Prepared: 09/25/26 14:00		Analyzed: 09/29/26 16:10								
QC Source Sample: 22390700-062BF26A (A6I1622-58)												
EPA 200.8												
Lead	15.9	---	0.201	ug/L	1	15.0	ND	106	70 - 130%	---	---	

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6I1622 - 10 02 26 1015**


SAMPLE PREPARATION INFORMATION

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Prep: EPA 200.8 Direct Analysis

Lab Number	Matrix	Method	Sampled	Prepared	Sample Initial/Final	Default Initial/Final	RL Prep Factor
Batch: 26I0693							
A6I1622-01	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 12:11	10mL/10mL	10mL/10mL	1.00
A6I1622-02	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 12:11	10mL/10mL	10mL/10mL	1.00
A6I1622-03	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 12:11	10mL/10mL	10mL/10mL	1.00
A6I1622-04	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 12:11	10mL/10mL	10mL/10mL	1.00
A6I1622-05	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 12:11	10mL/10mL	10mL/10mL	1.00
A6I1622-06	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 12:11	10mL/10mL	10mL/10mL	1.00
A6I1622-07	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 12:11	10mL/10mL	10mL/10mL	1.00
A6I1622-08	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 12:11	10mL/10mL	10mL/10mL	1.00
A6I1622-09	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 12:11	10mL/10mL	10mL/10mL	1.00
A6I1622-10	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 12:11	10mL/10mL	10mL/10mL	1.00
A6I1622-11	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 12:11	10mL/10mL	10mL/10mL	1.00
A6I1622-12	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 12:11	10mL/10mL	10mL/10mL	1.00
A6I1622-13	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 12:11	10mL/10mL	10mL/10mL	1.00
A6I1622-14	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 12:11	10mL/10mL	10mL/10mL	1.00
A6I1622-15	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 12:11	10mL/10mL	10mL/10mL	1.00
A6I1622-16	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 12:11	10mL/10mL	10mL/10mL	1.00
A6I1622-17	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 12:11	10mL/10mL	10mL/10mL	1.00
Batch: 26I0712							
A6I1622-18	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 07:54	10mL/10mL	10mL/10mL	1.00
A6I1622-19	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 07:54	10mL/10mL	10mL/10mL	1.00
A6I1622-20	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 07:54	10mL/10mL	10mL/10mL	1.00
A6I1622-21	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 07:54	10mL/10mL	10mL/10mL	1.00
A6I1622-22	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 07:54	10mL/10mL	10mL/10mL	1.00
A6I1622-23	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 07:54	10mL/10mL	10mL/10mL	1.00
A6I1622-24	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 07:54	10mL/10mL	10mL/10mL	1.00
A6I1622-25	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 07:54	10mL/10mL	10mL/10mL	1.00
A6I1622-26	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 07:54	10mL/10mL	10mL/10mL	1.00
A6I1622-27	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 07:54	10mL/10mL	10mL/10mL	1.00
A6I1622-28	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 07:54	10mL/10mL	10mL/10mL	1.00
A6I1622-29	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 07:54	10mL/10mL	10mL/10mL	1.00
A6I1622-30	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 07:54	10mL/10mL	10mL/10mL	1.00
A6I1622-31	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 07:54	10mL/10mL	10mL/10mL	1.00
A6I1622-32	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 07:54	10mL/10mL	10mL/10mL	1.00
A6I1622-33	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 07:54	10mL/10mL	10mL/10mL	1.00
A6I1622-34	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 07:54	10mL/10mL	10mL/10mL	1.00
A6I1622-35	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 07:54	10mL/10mL	10mL/10mL	1.00

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6I1622 - 10 02 26 1015**


SAMPLE PREPARATION INFORMATION

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Prep: EPA 200.8 Direct Analysis

Lab Number	Matrix	Method	Sampled	Prepared	Sample Initial/Final	Default Initial/Final	RL Prep Factor
A6I1622-36	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 07:54	10mL/10mL	10mL/10mL	1.00
A6I1622-37	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 07:54	10mL/10mL	10mL/10mL	1.00
Batch: 26I0729							
A6I1622-38	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 10:33	10mL/10mL	10mL/10mL	1.00
A6I1622-39	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 10:33	10mL/10mL	10mL/10mL	1.00
A6I1622-40	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 10:33	10mL/10mL	10mL/10mL	1.00
A6I1622-41	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 10:33	10mL/10mL	10mL/10mL	1.00
A6I1622-42	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 10:33	10mL/10mL	10mL/10mL	1.00
A6I1622-43	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 10:33	10mL/10mL	10mL/10mL	1.00
A6I1622-44	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 10:33	10mL/10mL	10mL/10mL	1.00
A6I1622-45	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 10:33	10mL/10mL	10mL/10mL	1.00
A6I1622-46	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 10:33	10mL/10mL	10mL/10mL	1.00
A6I1622-47	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 10:33	10mL/10mL	10mL/10mL	1.00
A6I1622-48	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 10:33	10mL/10mL	10mL/10mL	1.00
A6I1622-49	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 10:33	10mL/10mL	10mL/10mL	1.00
A6I1622-50	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 10:33	10mL/10mL	10mL/10mL	1.00
A6I1622-51	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 10:33	10mL/10mL	10mL/10mL	1.00
A6I1622-52	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 10:33	10mL/10mL	10mL/10mL	1.00
A6I1622-53	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 10:33	10mL/10mL	10mL/10mL	1.00
A6I1622-54	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 10:33	10mL/10mL	10mL/10mL	1.00
A6I1622-55	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 10:33	10mL/10mL	10mL/10mL	1.00
A6I1622-56	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 10:33	10mL/10mL	10mL/10mL	1.00
A6I1622-57	Drinking Water	EPA 200.8	09/19/26 00:00	09/24/26 10:33	10mL/10mL	10mL/10mL	1.00
Batch: 26I0789							
A6I1622-58	Drinking Water	EPA 200.8	09/19/26 00:00	09/25/26 14:00	10mL/10mL	10mL/10mL	1.00
A6I1622-59	Drinking Water	EPA 200.8	09/19/26 00:00	09/25/26 14:00	10mL/10mL	10mL/10mL	1.00
A6I1622-60	Drinking Water	EPA 200.8	09/19/26 00:00	09/25/26 14:00	10mL/10mL	10mL/10mL	1.00
A6I1622-61	Drinking Water	EPA 200.8	09/19/26 00:00	09/25/26 14:00	10mL/10mL	10mL/10mL	1.00
A6I1622-62	Drinking Water	EPA 200.8	09/19/26 00:00	09/25/26 14:00	10mL/10mL	10mL/10mL	1.00
A6I1622-63	Drinking Water	EPA 200.8	09/19/26 00:00	09/25/26 14:00	10mL/10mL	10mL/10mL	1.00
A6I1622-64	Drinking Water	EPA 200.8	09/19/26 00:00	09/25/26 14:00	10mL/10mL	10mL/10mL	1.00
A6I1622-65	Drinking Water	EPA 200.8	09/19/26 00:00	09/25/26 14:00	10mL/10mL	10mL/10mL	1.00
A6I1622-66	Drinking Water	EPA 200.8	09/19/26 00:00	09/25/26 14:00	10mL/10mL	10mL/10mL	1.00
A6I1622-67	Drinking Water	EPA 200.8	09/19/26 00:00	09/25/26 14:00	10mL/10mL	10mL/10mL	1.00
A6I1622-68	Drinking Water	EPA 200.8	09/19/26 00:00	09/25/26 14:00	10mL/10mL	10mL/10mL	1.00
A6I1622-69	Drinking Water	EPA 200.8	09/19/26 00:00	09/25/26 14:00	10mL/10mL	10mL/10mL	1.00

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6I1622 - 10 02 26 1015**

SAMPLE PREPARATION INFORMATION

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Prep: EPA 200.8 Direct Analysis

Lab Number	Matrix	Method	Sampled	Prepared	Sample Initial/Final	Default Initial/Final	RL Prep Factor
A6I1622-70	Drinking Water	EPA 200.8	09/19/26 00:00	09/25/26 14:00	10mL/10mL	10mL/10mL	1.00
A6I1622-71	Drinking Water	EPA 200.8	09/19/26 00:00	09/25/26 14:00	10mL/10mL	10mL/10mL	1.00
A6I1622-72	Drinking Water	EPA 200.8	09/19/26 00:00	09/25/26 14:00	10mL/10mL	10mL/10mL	1.00

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project:	**Hillsboro School District**	
4412 S Corbett Ave	Project Number:	**Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager:	**Dale Voeller**	**A6I1622 - 10 02 26 1015**

QUALIFIER DEFINITIONS

Client Sample and Quality Control (QC) Sample Qualifier Definitions:

There are No Qualifiers on Sample or QC Data for this report

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project: Hillsboro School District	
4412 S Corbett Ave	Project Number: Mooberry ES/26010605	Report ID:
Portland, OR 97239	Project Manager: Dale Voeller	A6I1622 - 10 02 26 1015

REPORTING NOTES AND CONVENTIONS:

Abbreviations:

DET Analyte DETECTED at or above the detection or reporting limit.

ND Analyte NOT DETECTED at or above the detection or reporting limit.

NR Result Not Reported.

RPD Relative Percent Difference. RPDs for Matrix Spikes and Matrix Spike Duplicates are based on concentration, not recovery.

Detection Limits: Limit of Detection (LOD)

Limits of Detection (LODs) are normally set at a level of one half the validated Limit of Quantitation (LOQ). If no value is listed ('-----'), then the data has not been evaluated below the Reporting Limit.

Reporting Limits: Limit of Quantitation (LOQ)

Validated Limits of Quantitation (LOQs) are reported as the Reporting Limits for all analyses where the LOQ, MRL, PQL or CRL are requested. The LOQ represents a level at or above the low point of the calibration curve, that has been validated according to Apex Laboratories' comprehensive LOQ policies and procedures.

Reporting and Detection Limits: Default Limits

Default Reporting and Detection Limits are based on 100% dry weight with the minimum dilution for the analysis. Reporting and Detection Limits are raised due to moisture content, additional dilutions required for analysis, matrix interferences and in other cases, as necessary.

Reporting Conventions:

Basis: Results for soil samples are generally reported on a 100% dry weight basis.

Results where dry weight correction has not been applied do not have the "dry" designation appended to the units, and results are reported on an "as received" basis.

Results for Volatiles analyses on soils and sediments that are reported on a “dry weight” basis include the water miscible solvent (WMS) correction referenced in the EPA 8000 Method guidance documents. Solid and Liquid samples reported on an “As Received” basis do not have the WMS correction applied, as dry weight was not performed.

QC Source:

In cases where there is insufficient sample provided for Sample Duplicates and/or Matrix Spikes, a Lab Control Sample Duplicate (LCS Dup) may be analyzed to demonstrate accuracy and precision of the extraction batch.


Non-Client Batch QC Samples (Duplicates and Matrix Spike/Duplicates) are not included in this report. Please request a Full QC report if this data is required.

Miscellaneous Notes:

" --- " QC results are not applicable. For example, % Recoveries for Blanks and Duplicates, % RPD for Blanks, Blank Spikes and Matrix Spikes, etc.

" *** " Used to indicate a possible discrepancy with the Sample and Sample Duplicate results when the %RPD is not available. In this case, either the Sample or the Sample Duplicate has a reportable result for this analyte, while the other is Non Detect (ND).

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6I1622 - 10 02 26 1015**

REPORTING NOTES AND CONVENTIONS (Cont.):

Blanks:

Standard practice is to evaluate the results from Blank QC Samples down to a level equal to one half of the Reporting Limit (RL).
Blank results for gravimetric analyses are evaluated to the Reporting Level, not to half of the Reporting Level.
-For Blank hits falling between ½ the RL and the RL (J flagged hits), the associated sample and QC data will receive a 'B-02' qualifier.
-For Blank hits above the RL, the associated sample and QC data will receive a 'B' qualifier, per Apex Laboratories' Blank Policy.
For further details, please request a copy of this document.

Sample results flagged with a 'B' or 'B-02' qualifier are potentially biased high if the sample results are less than ten times the level found in the blank for inorganic analyses, or less than five times the level found in the blank for organic analyses.
'B' and 'B-02' qualifications are only applied to sample results detected above the Reporting Level.

Preparation Notes:

Mixed Matrix Samples:

Water Samples:

Water samples containing significant amounts of sediment are decanted or separated prior to extraction, and only the water portion analyzed, unless otherwise directed by the client.

Soil and Sediment Samples:

Soil and Sediment samples containing significant amounts of water are decanted prior to extraction, and only the solid portion analyzed, unless otherwise directed by the client.

Sampling and Preservation Notes:

Certain regulatory programs, such as National Pollutant Discharge Elimination System (NPDES), require that activities such as sample filtration (for dissolved metals, orthophosphate, hexavalent chromium, etc.) and testing of short hold analytes (pH, Dissolved Oxygen, etc.) be performed in the field (on-site) within a short time window. In addition, sample matrix spikes are required for some analyses, and sufficient volume must be provided, and billable site specific QC requested, if this is required. All regulatory permits should be reviewed to ensure that these requirements are being met.

Data users should be aware of which regulations pertain to the samples they submit for testing. If related sample collection activities are not approved for a particular regulatory program, results should be considered estimates. Apex Laboratories will qualify these analytes according to the most stringent requirements, however results for samples that are for non-regulatory purposes may be acceptable.

Benzofluoranthene Isomer Reporting:

Due to coelutions present on the analytical column, the results reported for Benzo(b+j)fluoranthene(s) represent the concentraton of both the Benzo(b)fluoranthene and Benzo(j)fluoranthene isomers. Calibration, validation and accreditation are based on the Benzo(b)fluoranthene isomer.

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project:	**Hillsboro School District**	
4412 S Corbett Ave	Project Number:	**Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager:	**Dale Voeller**	**A6I1622 - 10 02 26 1015**

Decanted Samples:


Soils/Sediments:
Unless TCLP analysis is required or there is notification otherwise for a specific project, all Soil and Sediments containing excess water are decanted prior to analysis in order to provide the most representative sample for analysis.

Water Samples:
Water samples containing solids and sediment may need to be decanted in order to eliminate these particulates from the water extractions. In the case of organics extractions, a solvent rinse of the container will not be performed.

Volatiles Soils (5035s)
Samples that are field preserved by 5035 for volatiles are dry weight corrected using the same dry weight corretion as for normal analyses. In the case of decanted samples, the dry weight may be performed on a decanted sample, while the aliquot for 5035 may not have been treated the same way. If this is a concern, please submit separate containers for dry weight analysis for volatiles can be provided.

All samples decanted in the laboratory are noted in this report with the DCNT qualifier indicating the sample was decanted.

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6I1622 - 10 02 26 1015**

LABORATORY ACCREDITATION INFORMATION

ORELAP Certification ID: OR100062 (Primary Accreditation)
EPA ID: OR01039

All methods and analytes reported from work performed at Apex Laboratories are included on Apex Laboratories' ORELAP Scope of Certification, with the exception of any analyte(s) listed below:

Apex Laboratories

Matrix	Analysis	Analyte	TNI_ID	Accreditation
All reported analytes are included in Apex Laboratories' current ORELAP scope.				

Secondary Accreditations

Apex Laboratories also maintains reciprocal accreditation with non-TNI states (Washington DOE), as well as other state specific accreditations not listed here.


Subcontract Laboratory Accreditations

Subcontracted data falls outside of Apex Laboratories' Scope of Accreditation.
Please see the Subcontract Laboratory report for full details, or contact your Project Manager for more information.

Field Testing Parameters

Results for Field Tested data are provded by the client or sampler, and fall outside of Apex Laboratories' Scope of Accreditation.

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6I1622 - 10 02 26 1015**

APEX

Lead in Drinking Water COC

A6I1622

Date Collected: 09/19/2026 PBS Project: 26010605 / 0006

School Name: Mooberry ES

Building: Main Building - Round 1 Building Number: 22390700

Analysis Requested: Lead (Pb) in Drinking Water

Email Results To: dale.voeller@apexcos.com Turnaround Time: 10-day

	Fixture Number	Sample Number	Location / Description
1	001	22390700-001NS26A	Health Room – sink faucet
2	002	22390700-002SF26A	Staff Workroom - sink faucet
3	003	22390700-003DW26A	Room 1 -Drinking fountain
4	004	22390700-004CF26A	Room 1 – Classroom faucet
5	005	22390700-005DW26A	Room 2 -Drinking fountain
6	006	22390700-006CF26A	Room 2 – Classroom faucet
7	007	22390700-007DW26A	Room 3 -Drinking fountain
8	008	22390700-008CF26A	Room 3 – Classroom faucet
9	009	22390700-009DW26A	Room 4 -Drinking fountain
10	010	22390700-010CF26A	Room 4 – Classroom faucet
11	011	22390700-011DW26A	Room 5 -Drinking fountain
12	012	22390700-012CF26A	Room 5 – Classroom faucet
13	013	22390700-013DW26A	Room 6 -Drinking fountain
14	014	22390700-014CF26A	Room 6 – Classroom faucet
15	015	22390700-015DW26A	Room 7 -Drinking fountain
16	016	22390700-016CF26A	Room 7 – Classroom faucet
17	017	22390700-017DW26A	Room 8 -Drinking fountain
18	018	22390700-018CF26A	Room 8 – Classroom faucet
19	019	22390700-019DW26A	Room 9 -Drinking fountain
20	020	22390700-020CF26A	Room 9 – Classroom faucet
21	021	22390700-021SF26A	Room 24 / Staff workroom - sink faucet
22	022	22390700-022DW26A	Room 10 -Drinking fountain
23	023	22390700-023CF26A	Room 10 – Classroom faucet
24	024	22390700-024DW26A	Room 11 -Drinking fountain
25	025	22390700-025CF26A	Room 11 – Classroom faucet

APEX

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

Apex Companies, LLC - Portland
4412 S Corbett Ave
Portland, OR 97239

Project: **Hillsboro School District**
Project Number: **Mooberry ES/26010605**
Project Manager: **Dale Voeller**

Report ID:
A6I1622 - 10 02 26 1015

Lead in Drinking Water Testing Program — A6I1622 — Hillsboro School District

Date Collected: 09/19/2026 — School Name: Mooberry ES Main Bldg.

	Fixture Number	Sample Number	Location / Description
26	026	22390700-026DW26A	Room 12 -Drinking fountain
27	027	22390700-027CF26A	Room 12 – Classroom faucet
28	028	22390700-028DW26A	Room 13 -Drinking fountain
29	029	22390700-029CF26A	Room 13 – Classroom faucet
30	030	22390700-030DW26A	Room 14 - Drinking fountain
31	031	22390700-031CF26A	Room 14 – Classroom faucet
32	032	22390700-032DW26A	Room 15 -Drinking fountain
33	033	22390700-033CF26A	Room 15 – Classroom faucet
34	034	22390700-034DW26A	Room 16 - Drinking fountain
35	035	22390700-035CF26A	Room 16 – Classroom faucet
36	036	22390700-036DW26A	Room 17 -Drinking fountain
37	037	22390700-037CF26A	Room 17 – Classroom faucet
38	038	22390700-038DW26A	Room 18 -Drinking fountain
39	039	22390700-039CF26A	Room 18 – Classroom faucet
40	040	22390700-040DW26A	Room 20 – Drinking fountain
41	041	22390700-041CF26A	Room 20 – Classroom faucet
42	042	22390700-042KF26A	Kitchen – Prep sink (spray head only)
43	043	22390700-043SF26A	Faculty lunchroom – Sink faucet
44	044	22390700-044WC26A	Faculty lunchroom – Water cooler
45	045		NO FIXTURE
46	046	Fixture Replaced	Hallway at gym – Drinking fountain – left (now fixtures 075, 076, & 077)
47	047	Fixture Replaced	Hallway at gym – Drinking fountain – right (now fixtures 075, 076, & 077)
48	048	22390700-048DW26A	Room K101 – Drinking fountain
49	049	22390700-049CF26A	Room K101 – Classroom faucet
50	050	22390700-050CF26A	Room K102 – NW sink classroom faucet
51	051	22390700-051CF26A	Room K102 – NE sink classroom faucet
52	052	22390700-052DW26A	Room K103 – Drinking fountain
53	053	22390700-053CF26A	Room K103 – Classroom faucet
54	054	22390700-054BF26A	Lobby ADA restroom sink
55	055		NO FIXTURE
56	056	22390700-056BF26A	Staff restroom in main office

APEX

Apex Laboratories

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Jason Woodcock, Project Manager

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland
4412 S Corbett Ave
Portland, OR 97239

Project: **Hillsboro School District**
Project Number: **Mooberry ES/26010605**
Project Manager: **Dale Voeller**

Report ID:
A6I1622 - 10 02 26 1015

Lead in Drinking Water Testing Program — A6I1622 — Hillsboro School District

Date Collected: 09/19/2026 — School Name: Mooberry ES Main Bldg.

	Fixture Number	Sample Number	Location / Description
57	057	22390700-057BF26A	West girls restroom sink - left
58	058	22390700-058BF26A	West girls restroom sink - center
59	059	22390700-059BF26A	West girls restroom sink - right
60	060	22390700-060BF26A	West boys restroom sinks – left to right
61	061	22390700-061BF26A	West boys restroom sinks – left to right
62	062	22390700-062BF26A	West boys restroom sinks – left to right
63	062	22390700-063BF26A	West boys restroom sinks – left to right
64	064	22390700-064BF26A	East boys restroom sinks – left to right
65	065	22390700-065BF26A	East boys restroom sinks – left to right
66	066	22390700-066BF26A	East boys restroom sinks – left to right
67	067	22390700-067BF26A	East boys restroom sinks – left to right
68	068	22390700-068BF26A	East girls restroom sink - left
69	069	22390700-069BF26A	East girls restroom sink - center
70	070	22390700-070BF26A	East girls restroom sink - right
71	071	22390700-071BF26A	Staff restroom near faculty break room
72	072		Room 23 music room drinking fountain – NOT WORKING
73	073	22390700-073CF26A	Room 23 music room – classroom faucet
74	074	22390700-074KF26A	Kitchen double prep sink faucet
75	075	22390700-075WB26A	Hallway at gym – water bottle filler
76	076	22390700-076DW26A	Hallway at gym – Drinking fountain – left
77	077	22390700-077DW6A	Hallway at gym – Drinking fountain – right

Relinquished By/Signature: _____ Date/Time: 9/19/26 - 12:10 PM

Received By/Signature: _____ Date/Time: 9.21.26 1120

APEX.

3 of 3

Apex Laboratories

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Jason Woodcock, Project Manager

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6I1622 - 10 02 26 1015**

APEX LABS COOLER RECEIPT FORM

Client: Apex Company Element WO#: A6 I1622

Project/Project #: Mooberry ES #26010605/0006

Delivery Info:

Date/time received: 9.21.26 @ 11:20 By: DMC

Delivered by: Apex ✓Client ESS FedEx UPS Radio Morgan SDS Evergreen Other

From USDA Regulated Origin? Yes ____ No ✓

Cooler Inspection Date/time inspected: 9.21.26 @ 12:20 By: DMC

Chain of Custody included? Yes ✓ No ____

Signed/dated by client? Yes ✓ No ____

Contains USDA Reg. Soils? Yes ____ No ✓ Unsure (email RegSoils) ____

	Cooler #1	Cooler #2	Cooler #3	Cooler #4	Cooler #5	Cooler #6	Cooler #7
Temperature (°C)	5.1						
Custody seals? (Y/N)	N						
Received on ice? (Y/N)	Y						
Temp. blanks? (Y/N)	Y						
Ice type: (Gel/Real/Other)	Real						
Condition (In/Out):	In						

Cooler out of temp? (Y/N) Possible reason why:

Green dots applied to out of temperature samples? Yes (No)

Out of temperature samples form initiated? Yes (No)

Sample Inspection: Date/time inspected: 9-22-26 @ 1555 By: MH

All samples intact? Yes X No ___ Comments:

Bottle labels/COCs agree? Yes X No ___ Comments:

COC/container discrepancies form initiated? Yes ___ No X

Containers/volumes received appropriate for analysis? Yes X No ___ Comments:

Do VOA vials have visible headspace? Yes ___ No ___ NA X

Comments

Water samples: pH checked: Yes X No ___ NA ___ pH appropriate? Yes X No ___ NA ___ pH ID: A05971

Comments:

Labeled by: MH 9/23 Witness: Ryan Cooler Inspected by: Ryan

Form Y-003 R-02

Apex Laboratories

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Jason Woodcock, Project Manager

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Wednesday, October 7, 2026

Dale Voeller
Apex Companies, LLC - Portland
4412 S Corbett Ave
Portland, OR 97239

RE: A6J1191 - Hillsboro School District - Mooberry ES/26010605

Thank you for using Apex Laboratories. We greatly appreciate your business and strive to provide the highest quality services to the environmental industry.

Enclosed are the results of analyses for work order A6J1191, which was received by the laboratory on 10/5/2026 at 10:50:00AM.

If you have any questions concerning this report or the services we offer, please feel free to contact me by email at: jwoodcock@apex-labs.com, or by phone at 503-718-2323.

Please note: All samples will be disposed of within 30 days of sample receipt, unless prior arrangements have been made.

Cooler Receipt Information
Acceptable Receipt Temperature is less than, or equal to, 6 degC (not frozen), or received on ice the same day as sampling.
(See Cooler Receipt Form for details)
Default Cooler 22.8 degC

This Final Report is the official version of the data results for this sample submission, unless superseded by a subsequent, labeled amended report.
All other deliverables derived from this data, including Electronic Data Deliverables (EDDs), CLP-like forms, client requested summary sheets, and all other products are considered secondary to this report.

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6J1191 - 10 07 26 1652**

ANALYTICAL REPORT FOR SAMPLES

SAMPLE INFORMATION

Client Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
22390700-072DW26A	**A6J1191-01**	**Drinking Water**	**10/03/26 00:00**	**10/05/26 10:50**

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT


Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6J1191 - 10 07 26 1652**

ANALYTICAL SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Sample Result	Detection Limit	Reporting Limit	Units	Dilution	Date Analyzed	Method Ref.	Notes
22390700-072DW26A (A6J1191-01)				**Matrix: Drinking Water**				
Batch: 26J0129								
Lead	**0.918**	---	0.200	ug/L	1	10/06/26 15:01	EPA 200.8	

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6J1191 - 10 07 26 1652**

QUALITY CONTROL (QC) SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Result	Detection Limit	Reporting Limit	Units	Dilution	Spike Amount	Source Result	% REC	% REC Limits	RPD	RPD Limit	Notes
Batch 26J0129 - EPA 200.8 Direct Analysis											**Drinking Water**	
Blank (26J0129-BLK1)		Prepared: 10/05/26 14:19		Analyzed: 10/06/26 13:56								
EPA 200.8												
Lead	ND	---	0.200	ug/L	1	---	---	---	---	---	---	
LCS (26J0129-BS1)		Prepared: 10/05/26 14:19		Analyzed: 10/06/26 13:58								
EPA 200.8												
Lead	15.6	---	0.201	ug/L	1	15.0	---	104	85 - 115%	---	---	

No Client related Batch QC samples analyzed for this batch. See notes page for more information.

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6J1191 - 10 07 26 1652**

SAMPLE PREPARATION INFORMATION

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Prep: EPA 200.8 Direct Analysis

Lab Number	Matrix	Method	Sampled	Prepared	Sample Initial/Final	Default Initial/Final	RL Prep Factor
Batch: 26J0129							
A6J1191-01	Drinking Water	EPA 200.8	10/03/26 00:00	10/05/26 14:19	10mL/10mL	10mL/10mL	1.00

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT


Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6J1191 - 10 07 26 1652**

QUALIFIER DEFINITIONS

Client Sample and Quality Control (QC) Sample Qualifier Definitions:

There are No Qualifiers on Sample or QC Data for this report

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6J1191 - 10 07 26 1652**

REPORTING NOTES AND CONVENTIONS:

Abbreviations:

DET Analyte DETECTED at or above the detection or reporting limit.

ND Analyte NOT DETECTED at or above the detection or reporting limit.

NR Result Not Reported.

RPD Relative Percent Difference. RPDs for Matrix Spikes and Matrix Spike Duplicates are based on concentration, not recovery.

Detection Limits: Limit of Detection (LOD)

Limits of Detection (LODs) are normally set at a level of one half the validated Limit of Quantitation (LOQ). If no value is listed ('-----'), then the data has not been evaluated below the Reporting Limit.

Reporting Limits: Limit of Quantitation (LOQ)

Validated Limits of Quantitation (LOQs) are reported as the Reporting Limits for all analyses where the LOQ, MRL, PQL or CRL are requested. The LOQ represents a level at or above the low point of the calibration curve, that has been validated according to Apex Laboratories' comprehensive LOQ policies and procedures.

Reporting and Detection Limits: Default Limits

Default Reporting and Detection Limits are based on 100% dry weight with the minimum dilution for the analysis. Reporting and Detection Limits are raised due to moisture content, additional dilutions required for analysis, matrix interferences and in other cases, as necessary.

Reporting Conventions:

Basis: Results for soil samples are generally reported on a 100% dry weight basis.

Results where dry weight correction has not been applied do not have the "dry" designation appended to the units, and results are reported on an "as received" basis.

Results for Volatiles analyses on soils and sediments that are reported on a “dry weight” basis include the water miscible solvent (WMS) correction referenced in the EPA 8000 Method guidance documents. Solid and Liquid samples reported on an “As Received” basis do not have the WMS correction applied, as dry weight was not performed.

QC Source:

In cases where there is insufficient sample provided for Sample Duplicates and/or Matrix Spikes, a Lab Control Sample Duplicate (LCS Dup) may be analyzed to demonstrate accuracy and precision of the extraction batch.


Non-Client Batch QC Samples (Duplicates and Matrix Spike/Duplicates) are not included in this report. Please request a Full QC report if this data is required.

Miscellaneous Notes:

" --- " QC results are not applicable. For example, % Recoveries for Blanks and Duplicates, % RPD for Blanks, Blank Spikes and Matrix Spikes, etc.

" *** " Used to indicate a possible discrepancy with the Sample and Sample Duplicate results when the %RPD is not available. In this case, either the Sample or the Sample Duplicate has a reportable result for this analyte, while the other is Non Detect (ND).

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

Apex Companies, LLC - Portland	Project:	**Hillsboro School District**	
4412 S Corbett Ave	Project Number:	**Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager:	**Dale Voeller**	**A6J1191 - 10 07 26 1652**

REPORTING NOTES AND CONVENTIONS (Cont.):

Blanks:

Standard practice is to evaluate the results from Blank QC Samples down to a level equal to one half of the Reporting Limit (RL).
Blank results for gravimetric analyses are evaluated to the Reporting Level, not to half of the Reporting Level.
-For Blank hits falling between ½ the RL and the RL (J flagged hits), the associated sample and QC data will receive a 'B-02' qualifier.
-For Blank hits above the RL, the associated sample and QC data will receive a 'B' qualifier, per Apex Laboratories' Blank Policy.
For further details, please request a copy of this document.

Sample results flagged with a 'B' or 'B-02' qualifier are potentially biased high if the sample results are less than ten times the level found in the blank for inorganic analyses, or less than five times the level found in the blank for organic analyses.
'B' and 'B-02' qualifications are only applied to sample results detected above the Reporting Level.

Preparation Notes:

Mixed Matrix Samples:

Water Samples:

Water samples containing significant amounts of sediment are decanted or separated prior to extraction, and only the water portion analyzed, unless otherwise directed by the client.

Soil and Sediment Samples:

Soil and Sediment samples containing significant amounts of water are decanted prior to extraction, and only the solid portion analyzed, unless otherwise directed by the client.

Sampling and Preservation Notes:

Certain regulatory programs, such as National Pollutant Discharge Elimination System (NPDES), require that activities such as sample filtration (for dissolved metals, orthophosphate, hexavalent chromium, etc.) and testing of short hold analytes (pH, Dissolved Oxygen, etc.) be performed in the field (on-site) within a short time window. In addition, sample matrix spikes are required for some analyses, and sufficient volume must be provided, and billable site specific QC requested, if this is required. All regulatory permits should be reviewed to ensure that these requirements are being met.

Data users should be aware of which regulations pertain to the samples they submit for testing. If related sample collection activities are not approved for a particular regulatory program, results should be considered estimates. Apex Laboratories will qualify these analytes according to the most stringent requirements, however results for samples that are for non-regulatory purposes may be acceptable.

Benzofluoranthene Isomer Reporting:

Due to coelutions present on the analytical column, the results reported for Benzo(b+j)fluoranthene(s) represent the concentraton of both the Benzo(b)fluoranthene and Benzo(j)fluoranthene isomers. Calibration, validation and accreditation are based on the Benzo(b)fluoranthene isomer.

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project:	**Hillsboro School District**	
4412 S Corbett Ave	Project Number:	**Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager:	**Dale Voeller**	**A6J1191 - 10 07 26 1652**

Decanted Samples:

Soils/Sediments:
Unless TCLP analysis is required or there is notification otherwise for a specific project, all Soil and Sediments containing excess water are decanted prior to analysis in order to provide the most representative sample for analysis.

Water Samples:
Water samples containing solids and sediment may need to be decanted in order to eliminate these particulates from the water extractions. In the case of organics extractions, a solvent rinse of the container will not be performed.

Volatiles Soils (5035s)
Samples that are field preserved by 5035 for volatiles are dry weight corrected using the same dry weight corretion as for normal analyses. In the case of decanted samples, the dry weight may be performed on a decanted sample, while the aliquot for 5035 may not have been treated the same way. If this is a concern, please submit separate containers for dry weight analysis for volatiles can be provided.

All samples decanted in the laboratory are noted in this report with the DCNT qualifier indicating the sample was decanted.

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6J1191 - 10 07 26 1652**

LABORATORY ACCREDITATION INFORMATION

ORELAP Certification ID: OR100062 (Primary Accreditation)
EPA ID: OR01039

All methods and analytes reported from work performed at Apex Laboratories are included on Apex Laboratories' ORELAP Scope of Certification, with the exception of any analyte(s) listed below:

Apex Laboratories

Matrix	Analysis	Analyte	TNI_ID	Accreditation
All reported analytes are included in Apex Laboratories' current ORELAP scope.				

Secondary Accreditations

Apex Laboratories also maintains reciprocal accreditation with non-TNI states (Washington DOE), as well as other state specific accreditations not listed here.


Subcontract Laboratory Accreditations

Subcontracted data falls outside of Apex Laboratories' Scope of Accreditation.
Please see the Subcontract Laboratory report for full details, or contact your Project Manager for more information.

Field Testing Parameters

Results for Field Tested data are provded by the client or sampler, and fall outside of Apex Laboratories' Scope of Accreditation.

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6J1191 - 10 07 26 1652**

APEX.

Lead in Drinking Water COC

A6I1191
~~A6I1891~~ BA 1015

Date Collected: 10/03/2026

PBS Project: 26010605 / 0006

School Name: Mooberry ES

Building: Main Building - Round 2

Building Number: 22390700

Analysis Requested: Lead (Pb) in Drinking Water

Email Results To: dale.voeller@apexcos.com

Turnaround Time: RUSH

	Fixture Number	Sample Number	Location / Description
1	072	22390700-072DW26A	Room 23 music room drinking fountain
2			
3			
4			
5			
6			
7			
8			
9			
10			
11			
12			
13			
14			
15			
16			
17			
18			
19			
20			

Relinquished By/Signature: [signature] Date/Time: 10/3/26 11:48 AM

Received By/Signature: [signature] Date/Time: 10/5/26 10:50

APEX.

1 of 1

Apex Laboratories

[signature]

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6J1191 - 10 07 26 1652**

APEX LABS COOLER RECEIPT FORM

Client: Apex Co Element WO#: A6J1191

Project/Project #: Mooberry ES/26010605/0006

Delivery Info:

Date/time received: 10/5/26 @ 10:50 By: AJM

Delivered by: Apex ✓ Client ESS FedEx UPS Radio Morgan SDS Evergreen Other

From USDA Regulated Origin? Yes ____ No ✓

Cooler Inspection Date/time inspected: 10/5/26 @ 12:20 By: AJM

Chain of Custody included? Yes ✓ No ____

Signed/dated by client? Yes ✓ No ____

Contains USDA Reg. Soils? Yes ____ No ✓ Unsure (email RegSoils) ____

	Cooler #1	Cooler #2	Cooler #3	Cooler #4	Cooler #5	Cooler #6	Cooler #7
Temperature (°C)	22.8						
Custody seals? (Y/N)	N						
Received on ice? (Y/N)	N						
Temp. blanks? (Y/N)	N						
Ice type: (Gel/Real/Other)	None						
Condition (In/Out):	Out						

Cooler out of temp? (Y/N) Possible reason why: Lead Testing / Metals Testing

Green dots applied to out of temperature samples? Yes (No)

Out of temperature samples form initiated? Yes (No)

Sample Inspection: Date/time inspected: 10/5/26 @ 12:43 By: ZA

All samples intact? Yes ✓ No ___ Comments: ____

Bottle labels/COCs agree? Yes ✓ No ___ Comments: ____

COC/container discrepancies form initiated? Yes ___ No ✓

Containers/volumes received appropriate for analysis? Yes ✓ No ___ Comments: ____

Do VOA vials have visible headspace? Yes ___ No ___ NA ✓

Comments ____


Water samples: pH checked: Yes ✓ No ___ NA ___ pH appropriate? Yes ✓ No ___ NA ___ pH ID: A256271

Comments: ____

Labeled by: ZA Witness: [signature] Cooler Inspected by: [signature]

Form Y-003 R-02 -

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Friday, October 2, 2026

Dale Voeller
Apex Companies, LLC - Portland
4412 S Corbett Ave
Portland, OR 97239

RE: A6I1601 - Hillsboro School District - Mooberry ES/26010605

Thank you for using Apex Laboratories. We greatly appreciate your business and strive to provide the highest quality services to the environmental industry.

Enclosed are the results of analyses for work order A6I1601, which was received by the laboratory on 9/21/2026 at 11:26:00AM.

If you have any questions concerning this report or the services we offer, please feel free to contact me by email at: jwoodcock@apex-labs.com, or by phone at 503-718-2323.

Please note: All samples will be disposed of within 30 days of sample receipt, unless prior arrangements have been made.

Cooler Receipt Information
Acceptable Receipt Temperature is less than, or equal to, 6 degC (not frozen), or received on ice the same day as sampling.
(See Cooler Receipt Form for details)
Default Cooler 3.3 degC

This Final Report is the official version of the data results for this sample submission, unless superseded by a subsequent, labeled amended report.
All other deliverables derived from this data, including Electronic Data Deliverables (EDDs), CLP-like forms, client requested summary sheets, and all other products are considered secondary to this report.

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6I1601 - 10 02 26 1008**

ANALYTICAL REPORT FOR SAMPLES

SAMPLE INFORMATION

Client Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
22390706-001CF26A	A6I1601-01	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390706-002DW26A	A6I1601-02	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390706-003DW26A	A6I1601-03	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390706-004CF26A	A6I1601-04	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390706-005CF26A	A6I1601-05	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390706-006CF26A	A6I1601-06	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390706-007CF26A	A6I1601-07	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390706-008BF26A	A6I1601-08	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390706-009BF26A	A6I1601-09	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390706-010BF26A	A6I1601-10	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390706-011BF26A	A6I1601-11	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390706-012BF26A	A6I1601-12	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390706-013BF26A	A6I1601-13	Drinking Water	09/19/26 00:00	09/21/26 11:26

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

APEX LABORATORIES

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT


Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6I1601 - 10 02 26 1008**

ANALYTICAL SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Sample Result	Detection Limit	Reporting Limit	Units	Dilution	Date Analyzed	Method Ref.	Notes
22390706-001CF26A (A6I1601-01)				**Matrix: Drinking Water**				
Batch: 26I0678								
Lead	ND	---	0.200	ug/L	1	09/26/26 18:32	EPA 200.8	
22390706-002DW26A (A6I1601-02)				**Matrix: Drinking Water**				
Batch: 26I0678								
Lead	ND	---	0.200	ug/L	1	09/26/26 18:34	EPA 200.8	
22390706-003DW26A (A6I1601-03)				**Matrix: Drinking Water**				
Batch: 26I0678								
Lead	ND	---	0.200	ug/L	1	09/26/26 18:36	EPA 200.8	
22390706-004CF26A (A6I1601-04)				**Matrix: Drinking Water**				
Batch: 26I0678								
Lead	ND	---	0.200	ug/L	1	09/26/26 18:38	EPA 200.8	
22390706-005CF26A (A6I1601-05)				**Matrix: Drinking Water**				
Batch: 26I0678								
Lead	**0.811**	---	0.200	ug/L	1	09/26/26 18:40	EPA 200.8	
22390706-006CF26A (A6I1601-06)				**Matrix: Drinking Water**				
Batch: 26I0678								
Lead	ND	---	0.200	ug/L	1	09/26/26 18:42	EPA 200.8	
22390706-007CF26A (A6I1601-07)				**Matrix: Drinking Water**				
Batch: 26I0678								
Lead	**0.233**	---	0.200	ug/L	1	09/26/26 18:44	EPA 200.8	
22390706-008BF26A (A6I1601-08)				**Matrix: Drinking Water**				
Batch: 26I0678								
Lead	ND	---	0.200	ug/L	1	09/26/26 18:46	EPA 200.8	
22390706-009BF26A (A6I1601-09)				**Matrix: Drinking Water**				
Batch: 26I0678								
Lead	ND	---	0.200	ug/L	1	09/26/26 18:48	EPA 200.8	

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6I1601 - 10 02 26 1008**

ANALYTICAL SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Sample Result	Detection Limit	Reporting Limit	Units	Dilution	Date Analyzed	Method Ref.	Notes
22390706-010BF26A (A6I1601-10)				**Matrix: Drinking Water**				
Batch: 26I0678								
Lead	ND	---	0.200	ug/L	1	09/26/26 18:50	EPA 200.8	
22390706-011BF26A (A6I1601-11)				**Matrix: Drinking Water**				
Batch: 26I0693								
Lead	ND	---	0.200	ug/L	1	09/29/26 12:36	EPA 200.8	
22390706-012BF26A (A6I1601-12)				**Matrix: Drinking Water**				
Batch: 26I0693								
Lead	ND	---	0.200	ug/L	1	09/29/26 12:42	EPA 200.8	
22390706-013BF26A (A6I1601-13)				**Matrix: Drinking Water**				
Batch: 26I0693								
Lead	ND	---	0.200	ug/L	1	09/29/26 12:44	EPA 200.8	

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project:	Hillsboro School District
4412 S Corbett Ave	Project Number:	Mooberry ES/26010605
Portland, OR 97239	Project Manager:	Dale Voeller


Report ID:
A6I1601 - 10 02 26 1008

QUALITY CONTROL (QC) SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Result	Detection Limit	Reporting Limit	Units	Dilution	Spike Amount	Source Result	% REC	% REC Limits	RPD	RPD Limit	Notes
Batch 26I0678 - EPA 200.8 Direct Analysis											Drinking Water	
Blank (26I0678-BLK1)		Prepared: 09/23/26 08:58		Analyzed: 09/26/26 17:56								
EPA 200.8												
Lead	ND	---	0.200	ug/L	1	---	---	---	---	---	---	
LCS (26I0678-BS1)		Prepared: 09/23/26 08:58		Analyzed: 09/26/26 17:58								
EPA 200.8												
Lead	14.9	---	0.201	ug/L	1	15.0	---	100	85 - 115%	---	---	
Matrix Spike (26I0678-MS2)		Prepared: 09/23/26 08:58		Analyzed: 09/26/26 18:56								
QC Source Sample: 22390706-010BF26A (A6I1601-10)												
EPA 200.8												
Lead	14.7	---	0.201	ug/L	1	15.0	ND	98	70 - 130%	---	---	
Batch 26I0693 - EPA 200.8 Direct Analysis											Drinking Water	
Blank (26I0693-BLK1)		Prepared: 09/23/26 12:11		Analyzed: 09/29/26 12:32								
EPA 200.8												
Lead	ND	---	0.200	ug/L	1	---	---	---	---	---	---	
LCS (26I0693-BS1)		Prepared: 09/23/26 12:11		Analyzed: 09/29/26 12:34								
EPA 200.8												
Lead	15.3	---	0.201	ug/L	1	15.0	---	102	85 - 115%	---	---	
Duplicate (26I0693-DUP1)		Prepared: 09/23/26 12:11		Analyzed: 09/29/26 12:38								
QC Source Sample: 22390706-011BF26A (A6I1601-11)												
EPA 200.8												
Lead	ND	---	0.200	ug/L	1	---	ND	---	---	---	20%	
Matrix Spike (26I0693-MS1)		Prepared: 09/23/26 12:11		Analyzed: 09/29/26 12:40								
QC Source Sample: 22390706-011BF26A (A6I1601-11)												
EPA 200.8												
Lead	15.0	---	0.201	ug/L	1	15.0	ND	100	70 - 130%	---	---	

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6I1601 - 10 02 26 1008**

SAMPLE PREPARATION INFORMATION

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Prep: EPA 200.8 Direct Analysis

Lab Number	Matrix	Method	Sampled	Prepared	Sample Initial/Final	Default Initial/Final	RL Prep Factor
Batch: 26I0678							
A6I1601-01	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 08:58	10mL/10mL	10mL/10mL	1.00
A6I1601-02	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 08:58	10mL/10mL	10mL/10mL	1.00
A6I1601-03	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 08:58	10mL/10mL	10mL/10mL	1.00
A6I1601-04	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 08:58	10mL/10mL	10mL/10mL	1.00
A6I1601-05	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 08:58	10mL/10mL	10mL/10mL	1.00
A6I1601-06	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 08:58	10mL/10mL	10mL/10mL	1.00
A6I1601-07	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 08:58	10mL/10mL	10mL/10mL	1.00
A6I1601-08	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 08:58	10mL/10mL	10mL/10mL	1.00
A6I1601-09	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 08:58	10mL/10mL	10mL/10mL	1.00
A6I1601-10	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 08:58	10mL/10mL	10mL/10mL	1.00
Batch: 26I0693							
A6I1601-11	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 12:11	10mL/10mL	10mL/10mL	1.00
A6I1601-12	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 12:11	10mL/10mL	10mL/10mL	1.00
A6I1601-13	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 12:11	10mL/10mL	10mL/10mL	1.00

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT


Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6I1601 - 10 02 26 1008**

QUALIFIER DEFINITIONS

Client Sample and Quality Control (QC) Sample Qualifier Definitions:

There are No Qualifiers on Sample or QC Data for this report

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6I1601 - 10 02 26 1008**

REPORTING NOTES AND CONVENTIONS:

Abbreviations:

DET Analyte DETECTED at or above the detection or reporting limit.

ND Analyte NOT DETECTED at or above the detection or reporting limit.

NR Result Not Reported.

RPD Relative Percent Difference. RPDs for Matrix Spikes and Matrix Spike Duplicates are based on concentration, not recovery.

Detection Limits: Limit of Detection (LOD)

Limits of Detection (LODs) are normally set at a level of one half the validated Limit of Quantitation (LOQ). If no value is listed ('-----'), then the data has not been evaluated below the Reporting Limit.

Reporting Limits: Limit of Quantitation (LOQ)

Validated Limits of Quantitation (LOQs) are reported as the Reporting Limits for all analyses where the LOQ, MRL, PQL or CRL are requested. The LOQ represents a level at or above the low point of the calibration curve, that has been validated according to Apex Laboratories' comprehensive LOQ policies and procedures.

Reporting and Detection Limits: Default Limits

Default Reporting and Detection Limits are based on 100% dry weight with the minimum dilution for the analysis. Reporting and Detection Limits are raised due to moisture content, additional dilutions required for analysis, matrix interferences and in other cases, as necessary.

Reporting Conventions:

Basis: Results for soil samples are generally reported on a 100% dry weight basis.

Results where dry weight correction has not been applied do not have the "dry" designation appended to the units, and results are reported on an "as received" basis.

Results for Volatiles analyses on soils and sediments that are reported on a “dry weight” basis include the water miscible solvent (WMS) correction referenced in the EPA 8000 Method guidance documents. Solid and Liquid samples reported on an “As Received” basis do not have the WMS correction applied, as dry weight was not performed.

QC Source:

In cases where there is insufficient sample provided for Sample Duplicates and/or Matrix Spikes, a Lab Control Sample Duplicate (LCS Dup) may be analyzed to demonstrate accuracy and precision of the extraction batch.


Non-Client Batch QC Samples (Duplicates and Matrix Spike/Duplicates) are not included in this report. Please request a Full QC report if this data is required.

Miscellaneous Notes:

" --- " QC results are not applicable. For example, % Recoveries for Blanks and Duplicates, % RPD for Blanks, Blank Spikes and Matrix Spikes, etc.

" *** " Used to indicate a possible discrepancy with the Sample and Sample Duplicate results when the %RPD is not available. In this case, either the Sample or the Sample Duplicate has a reportable result for this analyte, while the other is Non Detect (ND).

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6I1601 - 10 02 26 1008**

REPORTING NOTES AND CONVENTIONS (Cont.):

Blanks:

Standard practice is to evaluate the results from Blank QC Samples down to a level equal to one half of the Reporting Limit (RL).
Blank results for gravimetric analyses are evaluated to the Reporting Level, not to half of the Reporting Level.
-For Blank hits falling between ½ the RL and the RL (J flagged hits), the associated sample and QC data will receive a 'B-02' qualifier.
-For Blank hits above the RL, the associated sample and QC data will receive a 'B' qualifier, per Apex Laboratories' Blank Policy.
For further details, please request a copy of this document.

Sample results flagged with a 'B' or 'B-02' qualifier are potentially biased high if the sample results are less than ten times the level found in the blank for inorganic analyses, or less than five times the level found in the blank for organic analyses.
'B' and 'B-02' qualifications are only applied to sample results detected above the Reporting Level.

Preparation Notes:

Mixed Matrix Samples:

Water Samples:

Water samples containing significant amounts of sediment are decanted or separated prior to extraction, and only the water portion analyzed, unless otherwise directed by the client.

Soil and Sediment Samples:

Soil and Sediment samples containing significant amounts of water are decanted prior to extraction, and only the solid portion analyzed, unless otherwise directed by the client.

Sampling and Preservation Notes:

Certain regulatory programs, such as National Pollutant Discharge Elimination System (NPDES), require that activities such as sample filtration (for dissolved metals, orthophosphate, hexavalent chromium, etc.) and testing of short hold analytes (pH, Dissolved Oxygen, etc.) be performed in the field (on-site) within a short time window. In addition, sample matrix spikes are required for some analyses, and sufficient volume must be provided, and billable site specific QC requested, if this is required. All regulatory permits should be reviewed to ensure that these requirements are being met.

Data users should be aware of which regulations pertain to the samples they submit for testing. If related sample collection activities are not approved for a particular regulatory program, results should be considered estimates. Apex Laboratories will qualify these analytes according to the most stringent requirements, however results for samples that are for non-regulatory purposes may be acceptable.

Benzofluoranthene Isomer Reporting:

Due to coelutions present on the analytical column, the results reported for Benzo(b+j)fluoranthene(s) represent the concentraton of both the Benzo(b)fluoranthene and Benzo(j)fluoranthene isomers. Calibration, validation and accreditation are based on the Benzo(b)fluoranthene isomer.

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project:	**Hillsboro School District**	
4412 S Corbett Ave	Project Number:	**Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager:	**Dale Voeller**	**A6I1601 - 10 02 26 1008**

Decanted Samples:

Soils/Sediments:
Unless TCLP analysis is required or there is notification otherwise for a specific project, all Soil and Sediments containing excess water are decanted prior to analysis in order to provide the most representative sample for analysis.

Water Samples:
Water samples containing solids and sediment may need to be decanted in order to eliminate these particulates from the water extractions. In the case of organics extractions, a solvent rinse of the container will not be performed.

Volatiles Soils (5035s)
Samples that are field preserved by 5035 for volatiles are dry weight corrected using the same dry weight corretion as for normal analyses. In the case of decanted samples, the dry weight may be performed on a decanted sample, while the aliquot for 5035 may not have been treated the same way. If this is a concern, please submit separate containers for dry weight analysis for volatiles can be provided.

All samples decanted in the laboratory are noted in this report with the DCNT qualifier indicating the sample was decanted.

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project:	**Hillsboro School District**	
4412 S Corbett Ave	Project Number:	**Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager:	**Dale Voeller**	**A6I1601 - 10 02 26 1008**

LABORATORY ACCREDITATION INFORMATION

ORELAP Certification ID: OR100062 (Primary Accreditation)
EPA ID: OR01039

All methods and analytes reported from work performed at Apex Laboratories are included on Apex Laboratories' ORELAP Scope of Certification, with the exception of any analyte(s) listed below:

Apex Laboratories

Matrix	Analysis	Analyte	TNI_ID	Accreditation
All reported analytes are included in Apex Laboratories' current ORELAP scope.				

Secondary Accreditations

Apex Laboratories also maintains reciprocal accreditation with non-TNI states (Washington DOE), as well as other state specific accreditations not listed here.


Subcontract Laboratory Accreditations

Subcontracted data falls outside of Apex Laboratories' Scope of Accreditation.
Please see the Subcontract Laboratory report for full details, or contact your Project Manager for more information.

Field Testing Parameters

Results for Field Tested data are provded by the client or sampler, and fall outside of Apex Laboratories' Scope of Accreditation.

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6I1601 - 10 02 26 1008**

AGI 1601

Lead in Drinking Water Testing Program

Date Collected: 09/19/2026

Apex Project: 26010605 / 0006

School Name: Mooberry ES

District: Hillsboro School District

Building: Modular Building

Building Number: 22390706

Analysis Requested: Lead (Pb) in Drinking Water

Email Results To: dale.voeller@apexcos.com

Turnaround Time: 10-day

	Fixture Number	Sample Number	Room / Location
1	001	22390706-001CF26A	Room M-5 – Classroom faucet
2	002	22390706-002DW26A	Hall at restrooms, drinking fountain - left
3	003	22390706-003DW26A	Hall at restrooms, drinking fountain - right
4	004	22390706-004CF26A	Room M-1 – Classroom faucet
5	005	22390706-005CF26A	Room M-2 - Classroom faucet
6	006	22390706-006CF26A	Room M-3 – Classroom faucet
7	007	22390706-007CF26A	Room M-4 - Classroom faucet
8	008	22390706-008BF26A	Room M-5 – restroom sink faucet
9	009	22390706-009BF26A	Girls restroom sink - left
10	010	22390706-010BF26A	Girls restroom sink - right
11	011	22390706-011BF26A	Boys restroom sink - left
12	012	22390706-012BF26A	Boys restroom sink - right
13	013	22390706-013BF26A	Staff restroom sink
14	014		
15	015		
16	016		
17	017		
18	018		
19	019		
20	020		

Relinquished By/Signature: Date/Time: 9/19/26 12:08PM

Received By/Signature: Date/Time: 9-21-26 11:26

APEX

1 of 1

Apex Laboratories

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Jason Woodcock, Project Manager

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6I1601 - 10 02 26 1008**

APEX LABS COOLER RECEIPT FORM

Client: Apex Company Element WO#: A6 I1601

Project/Project #: Mooberry ES #26010605/0006

Delivery Info:

Date/time received: 9.21.26 @ 11:20 By: DMC

Delivered by: Apex ✓ Client ESS FedEx UPS Radio Morgan SDS Evergreen Other

From USDA Regulated Origin? Yes ____ No ✓

Cooler Inspection Date/time inspected: 9.21.26 @ 12:18 By: DMC

Chain of Custody included? Yes ✓ No ____

Signed/dated by client? Yes ✓ No ____

Contains USDA Reg. Soils? Yes ____ No ✓ Unsure (email RegSoils) ____

	Cooler #1	Cooler #2	Cooler #3	Cooler #4	Cooler #5	Cooler #6	Cooler #7
Temperature (°C)	3.3						
Custody seals? (Y/N)	N						
Received on ice? (Y/N)	Y						
Temp. blanks? (Y/N)	Y						
Ice type: (Gel/Real/Other)	Gel						
Condition (In/Out):	In						

Cooler out of temp? (Y/(N)) Possible reason why: ____

Green dots applied to out of temperature samples? Yes (No)

Out of temperature samples form initiated? Yes (No)

Sample Inspection: Date/time inspected: 9-21-26 @ 1815 By: MLG

All samples intact? Yes X No ___ Comments: ____

Bottle labels/COCs agree? Yes ___ No X Comments: ~~Prefix for cont's 011 and 012 reads 2239700.~~ Prefix for cont's 011 and 012 reads 2239000. Hb 9/21/26

COC/container discrepancies form initiated? Yes ___ No X

Containers/volumes received appropriate for analysis? Yes X No ___ Comments: ____

Do VOA vials have visible headspace? Yes ___ No ___ NA X

Comments ____

Water samples: pH checked: Yes X No ___ NA ___ pH appropriate? Yes X No ___ NA ___ pH ID: A256071

Comments: ____

Labeled by: MLG Witness: Hb Cooler Inspected by: DMC

Form Y-003 R-02

Apex Laboratories

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Jason Woodcock, Project Manager

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Thursday, October 1, 2026

Dale Voeller
Apex Companies, LLC - Portland
4412 S Corbett Ave
Portland, OR 97239

RE: A6I1595 - Hillsboro School District - Mooberry ES/26010605

Thank you for using Apex Laboratories. We greatly appreciate your business and strive to provide the highest quality services to the environmental industry.

Enclosed are the results of analyses for work order A6I1595, which was received by the laboratory on 9/21/2026 at 11:26:00AM.

If you have any questions concerning this report or the services we offer, please feel free to contact me by email at: jwoodcock@apex-labs.com, or by phone at 503-718-2323.

Please note: All samples will be disposed of within 30 days of sample receipt, unless prior arrangements have been made.

Cooler Receipt Information		
Acceptable Receipt Temperature is less than, or equal to, 6 degC (not frozen), or received on ice the same day as sampling.		
(See Cooler Receipt Form for details)		
Default Cooler	3.3	degC

This Final Report is the official version of the data results for this sample submission, unless superseded by a subsequent, labeled amended report.
All other deliverables derived from this data, including Electronic Data Deliverables (EDDs), CLP-like forms, client requested summary sheets, and all other products are considered secondary to this report.

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6I1595 - 10 01 26 1232**

ANALYTICAL REPORT FOR SAMPLES

SAMPLE INFORMATION

Client Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
22390707-001WB26A	A6I1595-01	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390707-002DW26A	A6I1595-02	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390707-003DW26A	A6I1595-03	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390707-004BF26A	A6I1595-04	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390707-005BF26A	A6I1595-05	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390707-006BF26A	A6I1595-06	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390707-007BF26A	A6I1595-07	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390707-008BF26A	A6I1595-08	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390707-009BF26A	A6I1595-09	Drinking Water	09/19/26 00:00	09/21/26 11:26
22390707-010BF26A	A6I1595-10	Drinking Water	09/19/26 00:00	09/21/26 11:26

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT


Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6I1595 - 10 01 26 1232**

ANALYTICAL SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Sample Result	Detection Limit	Reporting Limit	Units	Dilution	Date Analyzed	Method Ref.	Notes
22390707-001WB26A (A6I1595-01)				**Matrix: Drinking Water**				
Batch: 26I0678								
Lead	ND	---	0.200	ug/L	1	09/26/26 18:00	EPA 200.8	
22390707-002DW26A (A6I1595-02)				**Matrix: Drinking Water**				
Batch: 26I0678								
Lead	ND	---	0.200	ug/L	1	09/26/26 18:10	EPA 200.8	
22390707-003DW26A (A6I1595-03)				**Matrix: Drinking Water**				
Batch: 26I0678								
Lead	ND	---	0.200	ug/L	1	09/26/26 18:12	EPA 200.8	
22390707-004BF26A (A6I1595-04)				**Matrix: Drinking Water**				
Batch: 26I0678								
Lead	ND	---	0.200	ug/L	1	09/26/26 18:14	EPA 200.8	
22390707-005BF26A (A6I1595-05)				**Matrix: Drinking Water**				
Batch: 26I0678								
Lead	ND	---	0.200	ug/L	1	09/26/26 18:16	EPA 200.8	
22390707-006BF26A (A6I1595-06)				**Matrix: Drinking Water**				
Batch: 26I0678								
Lead	ND	---	0.200	ug/L	1	09/26/26 18:18	EPA 200.8	
22390707-007BF26A (A6I1595-07)				**Matrix: Drinking Water**				
Batch: 26I0678								
Lead	ND	---	0.200	ug/L	1	09/26/26 18:20	EPA 200.8	
22390707-008BF26A (A6I1595-08)				**Matrix: Drinking Water**				
Batch: 26I0678								
Lead	ND	---	0.200	ug/L	1	09/26/26 18:22	EPA 200.8	
22390707-009BF26A (A6I1595-09)				**Matrix: Drinking Water**				
Batch: 26I0678								
Lead	ND	---	0.200	ug/L	1	09/26/26 18:24	EPA 200.8	

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT


Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6I1595 - 10 01 26 1232**

ANALYTICAL SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Sample Result	Detection Limit	Reporting Limit	Units	Dilution	Date Analyzed	Method Ref.	Notes
22390707-010BF26A (A6I1595-10)				**Matrix: Drinking Water**				
Batch: 26I0678								
Lead	ND	---	0.200	ug/L	1	09/26/26 18:26	EPA 200.8	

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: OR100062

ANALYTICAL REPORT


Apex Companies, LLC - Portland	Project: Hillsboro School District	
4412 S Corbett Ave	Project Number: Mooberry ES/26010605	Report ID:
Portland, OR 97239	Project Manager: Dale Voeller	A6I1595 - 10 01 26 1232

QUALITY CONTROL (QC) SAMPLE RESULTS

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Analyte	Result	Detection Limit	Reporting Limit	Units	Dilution	Spike Amount	Source Result	% REC	% REC Limits	RPD	RPD Limit	Notes
Batch 26I0678 - EPA 200.8 Direct Analysis											Drinking Water	
Blank (26I0678-BLK1)		Prepared: 09/23/26 08:58		Analyzed: 09/26/26 17:56								
EPA 200.8												
Lead	ND	---	0.200	ug/L	1	---	---	---	---	---	---	
LCS (26I0678-BS1)		Prepared: 09/23/26 08:58		Analyzed: 09/26/26 17:58								
EPA 200.8												
Lead	14.9	---	0.201	ug/L	1	15.0	---	100	85 - 115%	---	---	
Duplicate (26I0678-DUP1)		Prepared: 09/23/26 08:58		Analyzed: 09/26/26 18:02								
QC Source Sample: 22390707-001WB26A (A6I1595-01)												
EPA 200.8												
Lead	ND	---	0.200	ug/L	1	---	ND	---	---	---	20%	
Matrix Spike (26I0678-MS1)		Prepared: 09/23/26 08:58		Analyzed: 09/26/26 18:08								
QC Source Sample: 22390707-001WB26A (A6I1595-01)												
EPA 200.8												
Lead	14.8	---	0.201	ug/L	1	15.0	ND	98	70 - 130%	---	---	

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6I1595 - 10 01 26 1232**


SAMPLE PREPARATION INFORMATION

Total Metals in Drinking Water by EPA 200.8 (ICPMS)

Prep: EPA 200.8 Direct Analysis

Lab Number	Matrix	Method	Sampled	Prepared	Sample Initial/Final	Default Initial/Final	RL Prep Factor
Batch: 26I0678							
A6I1595-01	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 08:58	10mL/10mL	10mL/10mL	1.00
A6I1595-02	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 08:58	10mL/10mL	10mL/10mL	1.00
A6I1595-03	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 08:58	10mL/10mL	10mL/10mL	1.00
A6I1595-04	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 08:58	10mL/10mL	10mL/10mL	1.00
A6I1595-05	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 08:58	10mL/10mL	10mL/10mL	1.00
A6I1595-06	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 08:58	10mL/10mL	10mL/10mL	1.00
A6I1595-07	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 08:58	10mL/10mL	10mL/10mL	1.00
A6I1595-08	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 08:58	10mL/10mL	10mL/10mL	1.00
A6I1595-09	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 08:58	10mL/10mL	10mL/10mL	1.00
A6I1595-10	Drinking Water	EPA 200.8	09/19/26 00:00	09/23/26 08:58	10mL/10mL	10mL/10mL	1.00

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC

6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT


Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6I1595 - 10 01 26 1232**

QUALIFIER DEFINITIONS

Client Sample and Quality Control (QC) Sample Qualifier Definitions:

There are No Qualifiers on Sample or QC Data for this report

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6I1595 - 10 01 26 1232**

REPORTING NOTES AND CONVENTIONS:

Abbreviations:

DET Analyte DETECTED at or above the detection or reporting limit.

ND Analyte NOT DETECTED at or above the detection or reporting limit.

NR Result Not Reported.

RPD Relative Percent Difference. RPDs for Matrix Spikes and Matrix Spike Duplicates are based on concentration, not recovery.

Detection Limits: Limit of Detection (LOD)

Limits of Detection (LODs) are normally set at a level of one half the validated Limit of Quantitation (LOQ). If no value is listed ('-----'), then the data has not been evaluated below the Reporting Limit.

Reporting Limits: Limit of Quantitation (LOQ)

Validated Limits of Quantitation (LOQs) are reported as the Reporting Limits for all analyses where the LOQ, MRL, PQL or CRL are requested. The LOQ represents a level at or above the low point of the calibration curve, that has been validated according to Apex Laboratories' comprehensive LOQ policies and procedures.

Reporting and Detection Limits: Default Limits

Default Reporting and Detection Limits are based on 100% dry weight with the minimum dilution for the analysis. Reporting and Detection Limits are raised due to moisture content, additional dilutions required for analysis, matrix interferences and in other cases, as necessary.

Reporting Conventions:

Basis: Results for soil samples are generally reported on a 100% dry weight basis.

Results where dry weight correction has not been applied do not have the "dry" designation appended to the units, and results are reported on an "as received" basis.

Results for Volatiles analyses on soils and sediments that are reported on a “dry weight” basis include the water miscible solvent (WMS) correction referenced in the EPA 8000 Method guidance documents. Solid and Liquid samples reported on an “As Received” basis do not have the WMS correction applied, as dry weight was not performed.

QC Source:

In cases where there is insufficient sample provided for Sample Duplicates and/or Matrix Spikes, a Lab Control Sample Duplicate (LCS Dup) may be analyzed to demonstrate accuracy and precision of the extraction batch.


Non-Client Batch QC Samples (Duplicates and Matrix Spike/Duplicates) are not included in this report. Please request a Full QC report if this data is required.

Miscellaneous Notes:

" --- " QC results are not applicable. For example, % Recoveries for Blanks and Duplicates, % RPD for Blanks, Blank Spikes and Matrix Spikes, etc.

" *** " Used to indicate a possible discrepancy with the Sample and Sample Duplicate results when the %RPD is not available. In this case, either the Sample or the Sample Duplicate has a reportable result for this analyte, while the other is Non Detect (ND).

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

Apex Companies, LLC - Portland	Project:	**Hillsboro School District**	
4412 S Corbett Ave	Project Number:	**Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager:	**Dale Voeller**	**A6I1595 - 10 01 26 1232**

REPORTING NOTES AND CONVENTIONS (Cont.):

Blanks:

Standard practice is to evaluate the results from Blank QC Samples down to a level equal to one half of the Reporting Limit (RL).
Blank results for gravimetric analyses are evaluated to the Reporting Level, not to half of the Reporting Level.
-For Blank hits falling between ½ the RL and the RL (J flagged hits), the associated sample and QC data will receive a 'B-02' qualifier.
-For Blank hits above the RL, the associated sample and QC data will receive a 'B' qualifier, per Apex Laboratories' Blank Policy.
For further details, please request a copy of this document.

Sample results flagged with a 'B' or 'B-02' qualifier are potentially biased high if the sample results are less than ten times the level found in the blank for inorganic analyses, or less than five times the level found in the blank for organic analyses.
'B' and 'B-02' qualifications are only applied to sample results detected above the Reporting Level.

Preparation Notes:

Mixed Matrix Samples:

Water Samples:

Water samples containing significant amounts of sediment are decanted or separated prior to extraction, and only the water portion analyzed, unless otherwise directed by the client.

Soil and Sediment Samples:

Soil and Sediment samples containing significant amounts of water are decanted prior to extraction, and only the solid portion analyzed, unless otherwise directed by the client.

Sampling and Preservation Notes:

Certain regulatory programs, such as National Pollutant Discharge Elimination System (NPDES), require that activities such as sample filtration (for dissolved metals, orthophosphate, hexavalent chromium, etc.) and testing of short hold analytes (pH, Dissolved Oxygen, etc.) be performed in the field (on-site) within a short time window. In addition, sample matrix spikes are required for some analyses, and sufficient volume must be provided, and billable site specific QC requested, if this is required. All regulatory permits should be reviewed to ensure that these requirements are being met.

Data users should be aware of which regulations pertain to the samples they submit for testing. If related sample collection activities are not approved for a particular regulatory program, results should be considered estimates. Apex Laboratories will qualify these analytes according to the most stringent requirements, however results for samples that are for non-regulatory purposes may be acceptable.

Benzofluoranthene Isomer Reporting:

Due to coelutions present on the analytical column, the results reported for Benzo(b+j)fluoranthene(s) represent the concentraton of both the Benzo(b)fluoranthene and Benzo(j)fluoranthene isomers. Calibration, validation and accreditation are based on the Benzo(b)fluoranthene isomer.

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project:	**Hillsboro School District**	
4412 S Corbett Ave	Project Number:	**Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager:	**Dale Voeller**	**A6I1595 - 10 01 26 1232**

Decanted Samples:

Soils/Sediments:
Unless TCLP analysis is required or there is notification otherwise for a specific project, all Soil and Sediments containing excess water are decanted prior to analysis in order to provide the most representative sample for analysis.

Water Samples:
Water samples containing solids and sediment may need to be decanted in order to eliminate these particulates from the water extractions. In the case of organics extractions, a solvent rinse of the container will not be performed.

Volatiles Soils (5035s)
Samples that are field preserved by 5035 for volatiles are dry weight corrected using the same dry weight corretion as for normal analyses. In the case of decanted samples, the dry weight may be performed on a decanted sample, while the aliquot for 5035 may not have been treated the same way. If this is a concern, please submit separate containers for dry weight analysis for volatiles can be provided.

All samples decanted in the laboratory are noted in this report with the DCNT qualifier indicating the sample was decanted.

Apex Laboratories

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project:	**Hillsboro School District**	
4412 S Corbett Ave	Project Number:	**Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager:	**Dale Voeller**	**A6I1595 - 10 01 26 1232**

LABORATORY ACCREDITATION INFORMATION

ORELAP Certification ID: OR100062 (Primary Accreditation)
EPA ID: OR01039

All methods and analytes reported from work performed at Apex Laboratories are included on Apex Laboratories' ORELAP Scope of Certification, with the exception of any analyte(s) listed below:

Apex Laboratories

Matrix	Analysis	Analyte	TNI_ID	Accreditation
All reported analytes are included in Apex Laboratories' current ORELAP scope.				

Secondary Accreditations

Apex Laboratories also maintains reciprocal accreditation with non-TNI states (Washington DOE), as well as other state specific accreditations not listed here.


Subcontract Laboratory Accreditations

Subcontracted data falls outside of Apex Laboratories' Scope of Accreditation.
Please see the Subcontract Laboratory report for full details, or contact your Project Manager for more information.

Field Testing Parameters

Results for Field Tested data are provded by the client or sampler, and fall outside of Apex Laboratories' Scope of Accreditation.

Apex Laboratories



Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6I1595 - 10 01 26 1232**

Lead in Drinking Water Testing Program

A6I1595

Date Collected: 09/19/2026

Apex Project: 26010605 / 0006

School Name: Mooberry ES

District: Hillsboro School District

Building: Gymnasium

Building Number: 22390707

Analysis Requested: Lead (Pb) in Drinking Water

Email Results To: dale.voeller@apexcos.com

Turnaround Time: 10-day

	Fixture Number	Sample Number	Room / Location
1	001	22390707-001WB26A	Gym lobby – water bottle filler
2	002	22390707-002DW26A	Gym lobby – drinking fountain, left
3	003	22390707-003DW26A	Gym lobby – drinking fountain, right
4	004	22390707-004BF26A	North ADA restroom (nearest to lobby) sink
5	005	22390707-005BF26A	Restroom sinks – left to right (1)
6	006	22390707-006BF26A	Restroom sinks – left to right (2)
7	007	22390707-007BF26A	Restroom sinks – left to right (3)
8	008	22390707-008BF26A	Restroom sinks – left to right (4)
9	009	22390707-009BF26A	Restroom sinks – left to right (5)
10	010	22390707-010BF26A	South ADA restroom sink
11			
12			
13			
14			
15			
16			
17			
18			
19			
20			

Relinquished By/Signature: Dale Voeller Date/Time: 9/19/26 @ 12:08 PM

Received By/Signature: Date/Time: 9.21.26 11:26

APEX

1 of 1

Apex Laboratories

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.

Jason Woodcock, Project Manager

Apex Laboratories, LLC
6700 S.W. Sandburg Street
Tigard, OR 97223
503-718-2323
ORELAP ID: **OR100062**

ANALYTICAL REPORT

Apex Companies, LLC - Portland	Project: **Hillsboro School District**	
4412 S Corbett Ave	Project Number: **Mooberry ES/26010605**	**Report ID:**
Portland, OR 97239	Project Manager: **Dale Voeller**	**A6I1595 - 10 01 26 1232**

APEX LABS COOLER RECEIPT FORM

Client: Apex Company Element WO#: A6I1595

Project/Project #: Mooberry ES #26010605/0006

Delivery Info:

Date/time received: 9.21.26 @ 11:26 By: DMC

Delivered by: Apex ✓Client ESS FedEx UPS Radio Morgan SDS Evergreen Other

From USDA Regulated Origin? Yes ____ No ✓

Cooler Inspection Date/time inspected: 9.21.26 @ 12:19 By: DMC

Chain of Custody included? Yes ✓ No ____

Signed/dated by client? Yes ✓ No ____

Contains USDA Reg. Soils? Yes ____ No ✓ Unsure (email RegSoils) ____

	Cooler #1	Cooler #2	Cooler #3	Cooler #4	Cooler #5	Cooler #6	Cooler #7
Temperature (°C)	3.3						
Custody seals? (Y/N)	N						
Received on ice? (Y/N)	Y						
Temp. blanks? (Y/N)	Y						
Ice type: (Gel/Real/Other)	Gel						
Condition (In/Out):	In						

Cooler out of temp? (Y/(N)) Possible reason why: ____

Green dots applied to out of temperature samples? Yes/(No)

Out of temperature samples form initiated? Yes(No)

Sample Inspection: Date/time inspected: 9-21-26 @ 16:30 By: MW

All samples intact? Yes X No ___ Comments: ____

Bottle labels/COCs agree? Yes X No ___ Comments: ____

COC/container discrepancies form initiated? Yes ___ No X

Containers/volumes received appropriate for analysis? Yes X No ___ Comments: ____

Do VOA vials have visible headspace? Yes ___ No ___ NA X

Comments ____

Water samples: pH checked: Yes X No ___ NA ___ pH appropriate? Yes X No ___ NA ___ pH ID: A25Q271

Comments: ____

Labeled by: MW Witness: [signature] Cooler Inspected by:

Form Y-003 R-02 -

Apex Laboratories

[signature]

Jason Woodcock, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document(s) and updated by any subsequent written communications. This analytical report must be reproduced in its entirety.