North Polk CSD

Radon Plan and Test Schedule

Per Iowa Code Chapter 280.32 requirements



School Radon Training & Support System©

Created, facilitated, and supported by:

Energy Association of Iowa Schools

© 2015-2027. All Rights Reserved. This content is licensed only to this school for internal reproduction and internal distribution. This content may not be reproduced, copied, or distributed for any other purpose without written permission from Energy Association of Iowa Schools. | energyais.org

Dedication
I wish Gail Orcutt were here to protest the attention of this dedication. I can hear her saying, "Julie, this isn't about me—it's about teaching people to prevent lung cancer in others."

But Gail isn't here. She died of radon-induced lung cancer in 2020. She never knew that, after ten years of sharing her story and lobbying, in 2022 the Iowa Legislature passed a law known in her honor as the Gail Orcutt School Radon Safety Act (originally HF 2412, now written into Iowa Code 280.32).

I met Gail after hearing her present at the 2016 EPA Region 7 Radon Stakeholders Meeting. As a retired 33-year Iowa teacher, Gail strongly supported the School Radon Training & Support System© (SRTSS) created and facilitated by my nonprofit organization, Energy Association of Iowa Schools (EAIS). SRTSS© would not be what it is today without her.

It is therefore with extreme gratitude that the EAIS staff, and Board of Directors, remember our friend and colleague, Gail Orcutt. We dedicate this plan to her memory. Because, as she always said, "Fixing radon is easy. Lung cancer is not."

Julie Weisshaar, executive director
Energy Association of Iowa Schools



Gail Orcutt, Iowa Teacher and Radon Warrior 1952 – 2020. *The day before her 57th birthday, never-smoker Gail Orcutt learned she had lung cancer.*

Assurances
The School Radon Training & Support System© (SRTSS), created and facilitated by Energy Association of Iowa Schools (EAIS), meets Iowa Code Chapter 280.32: Uniform School Requirements. It has been approved by the State of Iowa Health and Human Services department as a Radon Measurement Training Course for Iowa School District Employees, meeting the requirements of IAC 641-43.8 (136B, 280). SRTSS© is based on the measurement requirements as found in the ANSI/AARST MA-MFLB-2023, *Protocol for Conducting Measurements of Radon and Radon Decay Products in Multifamily, School, Commercial and Mixed-Use Buildings,* as amended to August 1, 2025. Its Iowa HHS Course Number is SCHT00002.

Acknowledgements
SRTSS© is a hybrid model created for school teams to learn how to accurately test their own buildings for radon, based upon EAIS experience, school district staff experience and input, and appropriate industry references.

We especially thank the following for their support and contributions: Tim Hood, Iowa school superintendent; Dr. Bill Field, University of Iowa College of Public Health; and Gail Orcutt, radon-induced lung cancer warrior. EAIS is also grateful to the Iowa Cancer Consortium and Iowa Department of Public Health for past grant funding.

© 2015-2027 Energy Association of Iowa Schools | energyais.org

North Polk CSD RADON TESTING & MITIGATION PLAN

Table of Contents

1. **Dedication, Assurances and Acknowledgements**

2. **Introduction** 1
2. **School Radon Training & Support System (SRTSS)** 2
3. **Our Radon Plan at a Glance** 3
    - 3.1 Radon Team + Questions/Inquiries
    - 3.2 Buildings and Locations
    - 3.3 Radon Testing Rotation Calendar
4. **Radon Basics** 5
    - 4.1 What is Radon?
    - 4.2 Health Effect: Lung Cancer
    - 4.3 Action Level
    - 4.4 Radon in Iowa
    - 4.5 How Radon Gets Indoors
    - 4.6 Radon-Resistant Construction Techniques
5. **Testing for Radon** 10
    - 5.1 Our Short-Term Radon Test Kit
    - 5.2 Who Does Our Radon Testing?
    - 5.3 Which Buildings Are Tested?
    - 5.4 Which Spaces Do We Test?
    - 5.5 When We Test
    - 5.6 Deploying and Retrieving Radon Test Kits
    - 5.7 Quality Control
6. **Test Results** 14
7. **Fixing Any Elevated Levels** 14
8. **Communication** 15

Appendix A: SRTSS Flow Chart 16
Appendix B: IA Code Ch. 280.32: Uniform School Requirements 17
Appendix C: EAIS Training Approval Letter 18
Disclaimers 19

© 2015-2027 Energy Association of Iowa Schools | energyais.org

1. Introduction

Student learning and the safety of students, staff and community are priorities for North Polk CSD. Our commitment to a quality learning environment includes the provision of radon testing in school buildings on a rotating calendar basis and fixing any elevations, if needed.

North Polk CSD complies with all State of Iowa Code Chapter 280.32 Radon Testing and Mitigation requirements, including testing all attendance centers for radon at least once every five years. Short term radon tests are conducted by trained school district staff.

Why is radon testing and mitigation important? The United States Surgeon General issued a Health Advisory in 2005 that explained: "Radon is the second leading cause of lung cancer in the United States and breathing it over prolonged periods can present a significant health risk to families all over the country. *It's important to know that this threat is completely preventable*. Radon can be detected with a simple test and fixed through well-established venting techniques."

If radon test results in a **North Polk CSD** building are at or above the EPA action level of 4 pCi/L, steps will be taken to correct the issue following the *School Radon Training & Support System© Flow Chart* (Appendix A).

This **North Polk CSD** *Radon Plan and Test Schedule* shares our:

1) Plan for short-term radon testing at each attendance center under our control at least once by July 1, 2027, and at least once every five years thereafter
2) Schedule for short-term tests for radon at each attendance center
3) Testing results (also posted as required on the district's website)
4) Training completed to accurately and reliably measure radon levels in school buildings
5) Details on how a radon mitigation plan will be developed, if necessary, to decrease elevated radon levels to below 4 pCi/L

© 2015-2027 Energy Association of Iowa Schools | energyais.org

2. School Radon Training & Support System©

This plan is part of the overall School Radon Training & Support System© (SRTSS) in which North Polk CSD has chosen to participate. Energy Association of Iowa Schools (EAIS) created and facilitates the SRTSS©. This support system was created in 2015 and has continuously improved every year since, based upon the collaborative learning of EAIS and participating schools.

The SRTSS© provides us with continuous education and coaching, and gives us the tools and ongoing support we need to save budget dollars by doing our own short-term radon testing. It includes:

1. **Iowa school-specific training** during Kickoff workshops on how to accurately and reliably test our own buildings for radon. *(This Iowa School District Employee training is in no way meant to replace the specialized education required of radon experts who receive payment for testing as a profession.)*

2. This **personalized Radon Plan and Test Schedule.**

3. The **radon test kits** necessary for us to test our building(s) for the current year during the winter.

4. **Support from a real person** (our own radon rep) before, during, and after testing.

5. **Coaching on corrective measures and/or mitigation** for radon elevations, if needed.

6. Assistance with communications and **reporting to the public**, including a final report summary to post on our website as required.

7. Safe storage of our radon testing data.

8. Tracking our radon testing schedule, and **reminding us when it is time to test again** per our Radon Testing Rotation Calendar, and Iowa Code 280.32 requirements.

© 2015-2027 Energy Association of Iowa Schools | energyais.org

3. Our Radon Plan at a Glance

With the help of EAIS and the SRTSS©, we have assigned roles and responsibilities for quality assurance, and strategically determined where and when to test for radon in our school district.

3.1 North Polk CSD Radon Team + Questions/Inquiries

Questions regarding this School Radon Testing and Mitigation Plan may be directed to:

Administrative office address: 13930 NE 6th St, Alleman, IA, 50007

School district phone: (515) 984-3400

Superintendent / District Spokesperson: Michael Kline

Facilities Manager / Radon Test Coordinator: June Carstensen

3.2 North Polk CSD Buildings and Locations

Central Elem
311 NE 141st Ave
Alleman, IA 50007

HS
13930 NE 6th St
Alleman, IA 50007

MS
315 NE 141st AVE.
Alleman, IA 50007

West Elem
1400 W Broadway
Polk City, IA 50226

Big Creek Interm
304 E VistLake Drive
Polk City, IA 50026

© 2015-2027 Energy Association of Iowa Schools | energyais.org

3.3 North Polk CSD Radon Testing Rotation Calendar

School Year	Buildings Scheduled
2022-2023	Central Elem, West Elem
2023-2024	MISSED TESTING
2024-2025	MS, Big Creek Interm
2025-2026	HS
2026-2027	NO TESTING NEEDED
2027-2028	Central Elem, West Elem
2028-2029	NO TESTING NEEDED
2029-2030	MS, Big Creek Interm
2030-2031	HS
2031-2032	

Note: Per Iowa Code Chapter 280.32 Iowa public school districts are required to test attendance centers every 5 years. National radon protocol dictates mitigated spaces be tested at 2-year intervals for a period of 8 years to ensure continued effectiveness.

Schedule is subject to change

© 2015-2027 Energy Association of Iowa Schools | energyais.org

4. Radon Basics

4.1 What is Radon?

Radon is a naturally occurring radioactive gas that is colorless, odorless, and tasteless. It comes from the natural breakdown or decay of uranium, which is found in soil and rock all over the United States and the world.

Radon travels through the ground and into the air above, entering buildings through cracks and other holes in the foundation. If radon becomes trapped indoors, it can build up and become a health safety problem in buildings. Every building has the potential for unsafe levels of radon.

Radon gas breaks down into radioactive particles called radon decay products that can be breathed in, and become trapped in the lungs, releasing small bursts of radiation. This radiation may damage the body's DNA and lung tissue, and lead to an increased risk of lung cancer over the course of a person's lifetime.

The higher the level of radon and the longer the exposure, the greater the risk. **Because radon is colorless, odorless, and tasteless, the only way to know if it is present is to test.**

4.2 Health Effect: Lung Cancer

Radon is the leading cause of lung cancer among people who have never smoked, and the second leading cause of lung cancer overall after cigarette smoking. According to the U.S. Environmental Protection Agency, radon is responsible for about one in seven lung cancer deaths in the U.S., causing over 21,000 lung cancer deaths annually.

Scientists are certain that radon causes lung cancer due to decades of data from underground uranium miners who breathed high levels of radon on the job, and died from lung cancer at very high rates. Large pooled studies in North America and Europe confirmed that low-level, long-term exposure in regular homes creates the same cellular damage and cancer risk.

© 2015-2027 Energy Association of Iowa Schools | energyais.org

The EPA classifies radon as a Group A: Known human carcinogen, which drives nationwide guidance and action thresholds. According to the EPA, the risk of lung cancer from radon exposure at the action level of 4 pCi/L compares to the risk of dying in a car crash. As the radon level increases, the risk increases.

Not everyone who breathes radon decay products will necessarily develop lung cancer. An individual's risk of getting lung cancer from radon depends on three factors: 1) Level of radon, 2) Duration of exposure, and 3) Other cancer risk factors, such as smoking combined with radon exposure (risk increases about 10 times).

Even with treatment, the survival rate of lung cancer is one of the lowest for those with cancer. From the time of diagnosis, only between 11 and 15 percent of those diagnosed will live beyond five years.

It is important to decrease exposure in homes and schools if elevated radon levels are found.

4.3 Action Level

The **EPA has established 4 picocuries per liter of air (pCi/L) as the United States "Action Level"** at which corrective measures and/or active radon mitigation should occur to bring elevated radon levels down.

Radon levels vary throughout each day, therefore protocol dictates using an average radon result to determine if mitigation is needed. If an initial radon test result is at or above 4 pCi/L, a second test should be done to determine the average radon result.

If the average of two radon test results is at or above 4 pCi/L, a licensed radon mitigator can work to reduce radon levels to as low as reasonably achievable.

Reducing levels to zero is likely impossible, as radon exists even in outdoor air at a level of about 0.4 pCi/L.

Any exposure to radon carries some risk, but the lower the exposure—in terms of time and concentration—the lower the risk.

© 2015-2027 Energy Association of Iowa Schools | energyais.org

4.4 Radon in Iowa

The Environmental Protection Agency (EPA) has designated the **entire state of Iowa to be a High-risk Zone 1** for predicted average indoor radon levels greater than the action level of 4 pCi/L. Iowa has high radon levels due to prehistoric glacial activity that covered the area in uranium-rich bedrock and finely ground soil. Other states, primarily in the northern half of the U.S., are also designated as high risk for radon.

For most students and staff, the largest contributor to radon exposure is in the home. This is because people typically spend more time at home than anywhere else. In Iowa, it is estimated that as many as five in seven homes (71%) have radon levels above the action level. Parents and staff are encouraged to test their homes for radon and to take action to reduce elevated concentrations.

The second largest contributor to radon exposure for most students and staff is school. An EPA nationwide survey of radon levels in schools estimated that nearly one in five schools has at least one room with a short-term radon level above the action level of 4.0 pCi/L.


4.5 How Radon Gets Indoors

No matter how old or new, every building has the potential for elevated levels of radon. Radon moves from the soil below upward through cracks and other openings in the foundations of buildings. Indoor concentrations vary based on source strength, pathways, and soil permeability. Building pressure and ventilation also contribute to radon concentration variability.

Many school buildings are constructed on adjoining floor slabs, which permit radon to enter through construction and expansion joints between the slabs. Additional places radon can enter a building are cracks or penetrations in concrete, spaces around pipes, floor drains, sump pits, and hollow masonry walls. See *Figure 1: How Radon Enters a Building* on the next page.

Air pressure inside a building is sometimes lower than pressure in the soil under a foundation. Because of this difference in pressure, any building can act like a vacuum, drawing radon inside.

© 2015-2027 Energy Association of Iowa Schools | energyais.org

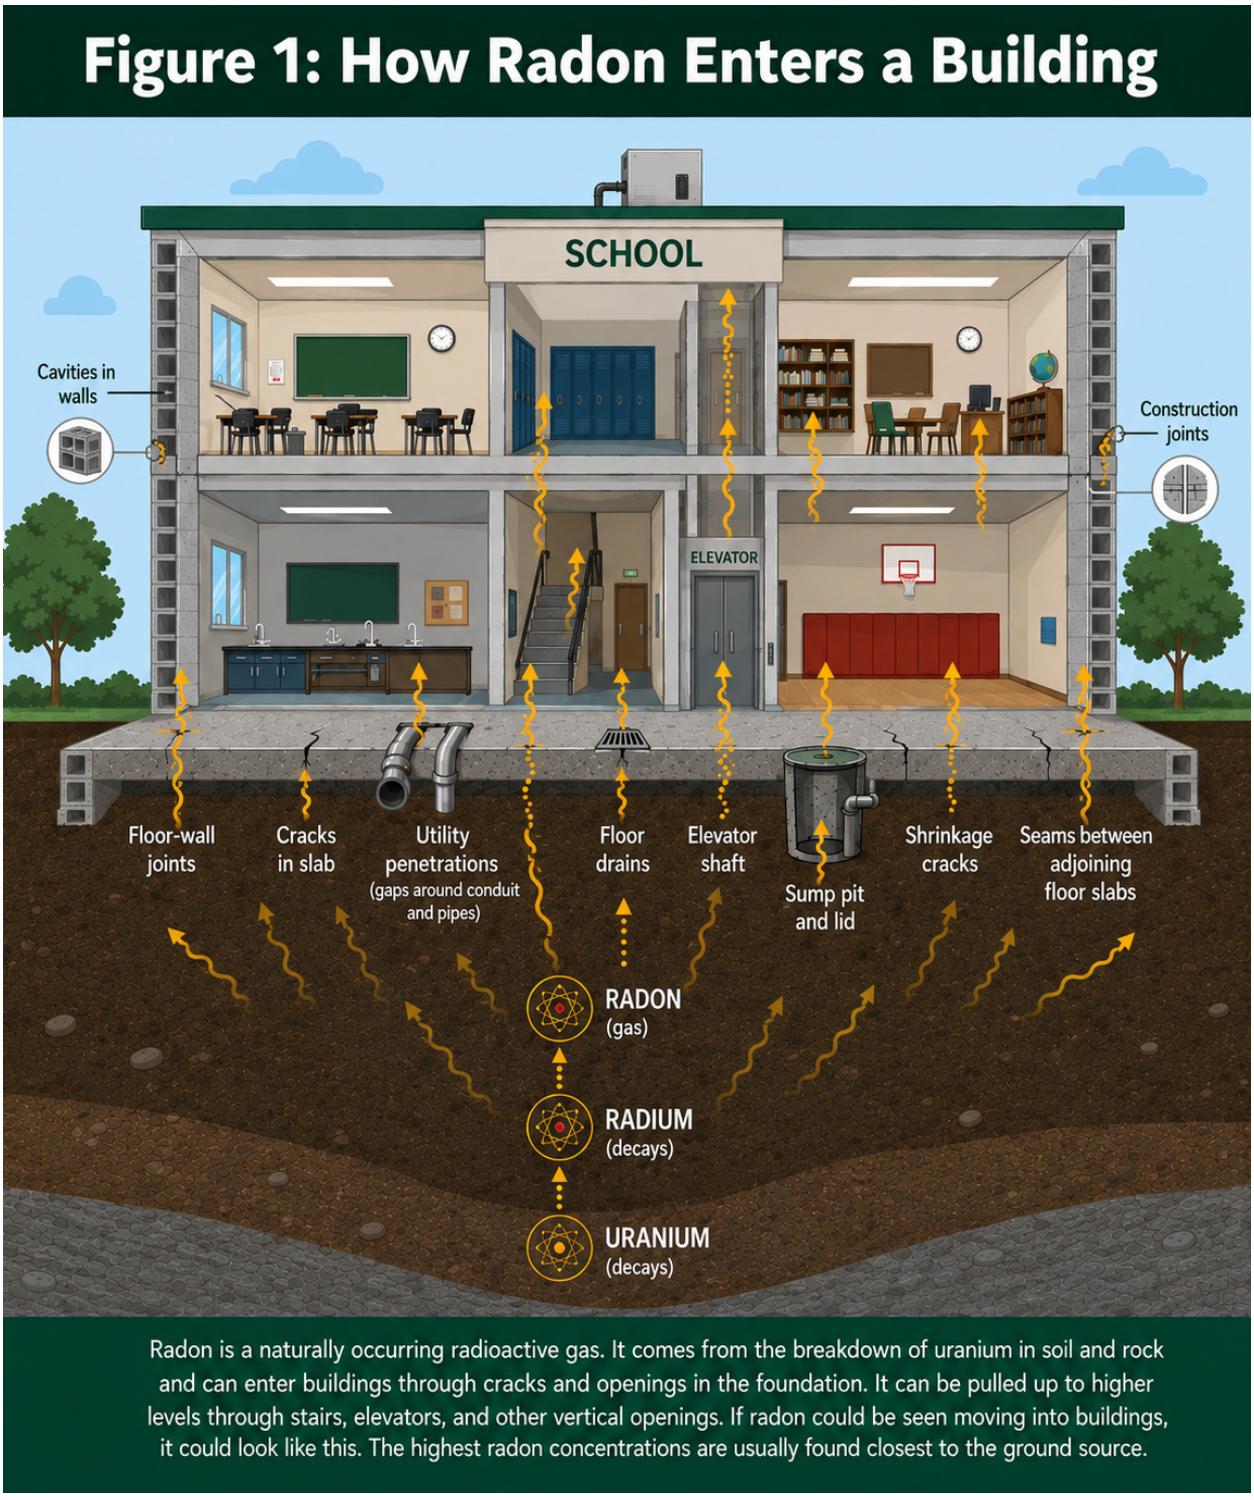

This figure was AI-generated with human EAIS staff guidance as a tool to visualize how radon can enter a building.

© 2015–2027 Energy Association of Iowa Schools | energyais.org

4.6 Radon-Resistant Construction Techniques

Radon-resistant construction techniques are required for new school construction by Iowa Code Chapter 280.32. Radon resistant new construction (RRNC) includes sealing radon entry points and installing a vent pipe, but it does not include a fan. Instead, this passive radon system relies on the natural upward flow of air to exhaust radon through the pipe.

After construction is complete, if the school finds average radon elevations at or above 4 pCi/L, the radon system can then easily and affordably become an active system with the installation of a fan.

RRNC techniques vary for different foundations and building site requirements. The following are basic components in radon-resistant construction:

1. **Gas-Permeable Layer (Sub-Slab):** Four- to six-inch layer of clean, coarse gravel is placed beneath the slab to allow soil gas, including radon, to move more freely underneath a foundation so it can more easily and safely be vented outside above the building. Soil-gas collection mats or drainage mats can also be used.
2. **Vapor Barrier:** Plastic sheeting/soil gas retarder is placed on top of the gravel and vapor mat or perforated pipe to prevent soil gases from rising into the building.
3. **Radon Vent Pipes:** When the slab is poured, ports are stubbed in for vent pipes every 2,000 – 4,000 SF. Three-inch or four-inch diameter PVC radon pipes are routed vertically from the gravel layer ports up through the building's conditioned space and roof to safely vent radon and other gases outside above the building. Radon pipes are clearly labeled "Radon System" on the roof.
4. **Sealing and Caulking:** Every penetration through the concrete is checked and sealed tight (including the slab perimeter crack) with polyurethane caulk. Sump baskets must have a sealed cover. After the concrete cures and shrinks (typically waiting 30 to 60 days) the perimeter gap where the slab meets the foundation wall and any control joints should also be sealed to finalize the gas barrier.
5. **Electrical Junction Boxes:** Installed on the roof near vent pipes. This power supply will be ready to use if the passive radon system needs to be activated to power an Active Soil Depressurization/radon mitigation fan in the future.

© 2015-2027 Energy Association of Iowa Schools | energyais.org

5. Testing for Radon

Iowa Code Chapter 280.32 *Radon testing and mitigation*, requires Iowa's public school districts to test attendance centers using short-term tests for radon gas every five years. The EAIS School Radon Training & Support System© (SRTSS) teaches our school district employees the proper radon protocols, and short-term test placements, that provide accurate and reliable radon results.


5.1 Our Short-Term Radon Test Kit

It is critical that all devices used for measuring radon in schools meet the EPA's Radon Measurement Proficiency Program (RMP) or State certification program requirements. SRTSS© teaches us to utilize short-term radon test kits from the Iowa-certified radon laboratory, Air Chek, Inc.

The test kit, itself, is not harmful in any way. It is an envelope containing a packet of activated charcoal. The kits are passive devices requiring no power to function.

For quality assurance, chain of custody protection, and data tracking purposes, short-term radon test kits are purchased by Energy Association of Iowa Schools, and provided to school districts participating in the SRTSS©

Figure 2. Air Chek Short-Term Radon Test Kit

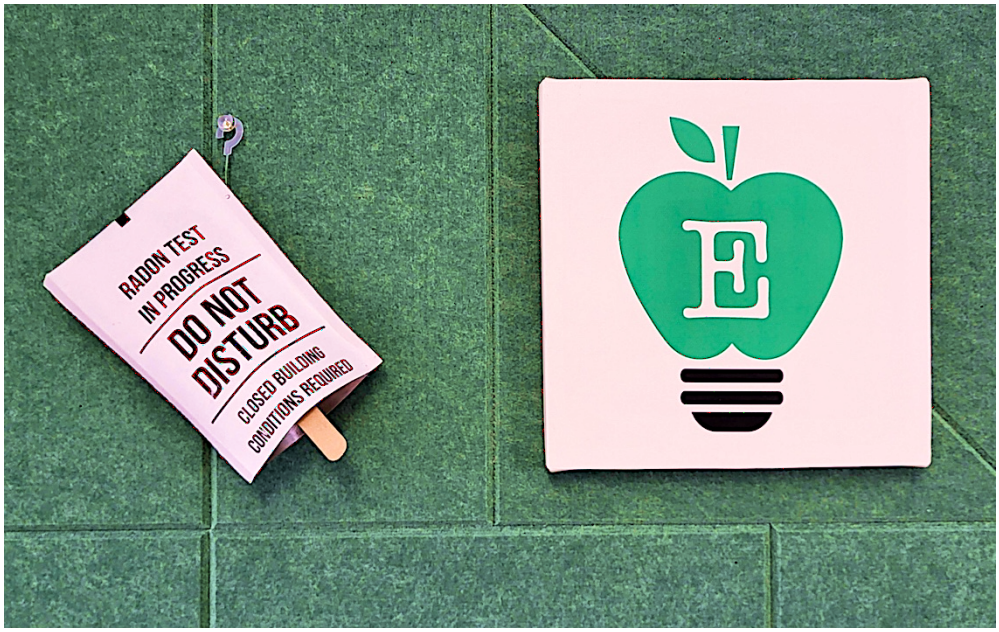

© 2015-2027 Energy Association of Iowa Schools | energyais.org

5.2 Who Does Our Radon Testing?

The school radon team members listed on Page 3 have received Certificates of Completion from the SRTSS©, and they accurately and reliably conduct our school district's radon testing.

Our school employees are already familiar with the layouts, construction types, and HVAC systems of our buildings, and are well qualified to conduct radon testing.

In Iowa public schools, district employees who have completed a school radon testing training program approved by the Department of Education and the Department of Health and Human Services may conduct radon testing for their employing school district.

The EAIS School Radon Training & Support System© (SRTSS) has been approved by the State of Iowa Department of Health and Human Services as a Radon Measurement Training Course for Iowa School District Employees, as it meets the requirements of IAC 641-43.8 (136B,280).

5.3 Which Buildings Are Tested?

Iowa Code Chapter 280.32 requires public school districts to test each attendance center under its control, which means we test every building that houses our students.

Our school district believes in providing safe work spaces for our staff, as well. Therefore, we also test the occupied spaces of our non-attendance buildings for radon.

© 2015-2027 Energy Association of Iowa Schools | energyais.org

5.4 Which Spaces Do We Test?

All occupied spaces that are in contact with the ground are tested for radon. We also test occupied spaces that are not in contact with the ground, but are above unoccupied/untested spaces with ground contact, i.e. basements, crawl spaces, tunnels, and mechanical rooms.

Tested spaces include classrooms, break rooms, offices, gyms, auditoriums, and cafeterias. Per radon protocol, we do not test storage rooms, stairwells, rest rooms, utility closets, kitchens, elevator shafts, or hallways.

We also test spaces that are not currently occupied, but could be appropriate for occupancy in the future. This gives us the flexibility to relocate a classroom or office if necessary. These tests could also help with diagnostic testing if elevated levels of radon are found in other spaces close by.

All occupied spaces meeting requirements on the first floor are tested for radon, plus 10% of the occupied rooms on any second and/or third floors.

5.5 When We Test

It is important that we measure radon levels during normal, everyday use and activity while students and staff are in our buildings. This means we test for radon during occupied weekdays, under closed building conditions when heating, ventilation, and air conditioning (HVAC) systems are operating normally.

National protocol dictates that radon testing should be done during a building's normal operating conditions—which in Iowa's Climate Zones 5 and 6 means when the heating system is operating with no variance in outdoor air ventilation. We test for radon during the winter.

We do NOT test during:

1) Structural changes to a building and/or renovation or replacement of the HVAC system.
2) Major weather events such as *sustained* high winds (30 mph or more), excessive rain or snow, and/or 3/4-inch hail. Rapid changes in barometric pressure can affect radon levels and skew test results.

© 2015-2027 Energy Association of Iowa Schools | energyais.org

5.6 Deploying and Retrieving Radon Test Kits

In order to gain accurate and reliable results, it is important that short-term radon test kits are correctly deployed and retrieved. Our school district's trained staff place test kits within the breathing zone (between 2 and 6 feet from the floor), avoiding areas of high heat, humidity, and air drafts.

Closed building conditions are maintained the entire time radon test kits are deployed. Test kits are not touched or disturbed in any way once they are deployed.

After being exposed for the SRTSS© *School Radon Test Week Timetable* of 96 hours, each kit is retrieved and sent to the lab for analysis.

5.7 Quality Control

For Quality Control purposes, the following is incorporated into our testing:

- 5% field blanks + 10% duplicates
- Closed building conditions
    - All windows and doors on all levels shut, except for normal entry/exit
- Open and routine communications
- Chain of Custody and Datalogs
    - Identifying who will be handling test kits and test data is an integral element to achieving quality results and preventing costly errors that could require retesting.

© 2015-2027 Energy Association of Iowa Schools | energyais.org

6. Test Results

Once initial testing is completed and results are returned to us by Energy Association of Iowa Schools (EAIS), the *School Radon Training & Support System Flow Chart*© informs what needs to be done next for the safety of our students, staff, and community.

For any test result at or above the EPA's action level of 4.0 pCi/L, EAIS coaches us through the next steps of potential corrective measures and follow-up testing.

Iowa Code Chapter 280.32 requires public school districts to "publish testing results on the district's internet site in a timely manner." EAIS provides us with an official *School District Radon Testing Report* to post on our website.

7. Fixing Any Elevated Levels

Per Iowa Code Chapter 280.32, if averaged results of any first and second radon tests are at or above 4 pCi/L, we will employ an Iowa-licensed radon mitigator to develop a radon mitigation plan to bring our radon levels down.

If corrective measures are not found on site, an active radon mitigation system will be installed. This means one or more suction pipes will be inserted through the floor slab into the crushed rock or soil underneath, and vented out above the roof. The number and location of suction pipes needed depends on how easily air can move under the slab, and on the strength of the radon source.

A radon vent fan will then be connected to the suction pipes, and draw the radon gas from below the slab to be safely released into the outdoor air above the building.

If needed, an active radon mitigation system would allow radon to bypass our conditioned space without ever entering our building.

© 2015-2027 Energy Association of Iowa Schools | energyais.org

8. Communication

Strong two-way communication enables accurate and reliable radon testing, as well as positive public relations, for our school district. Communication also minimizes misinformation, and reassures staff, students, and community.

Thanks to the guidance and templates provided by EAIS and the School Radon Training & Support System©, communication is easy, and occurs at all phases of our school radon testing.

Communication tools vary by audience, and include, but are not limited to:

1) Knowledge and tools for the superintendent/**district spokesperson** to be available and accessible to answer school radon testing questions from community and staff
2) Knowledge and tools for the facilities manager/**radon test coordinator** to be available and accessible to answer school radon testing questions from staff and students
3) Information for **building principals** and **district staff** about school radon testing and the importance of proper testing conditions, to also be shared as needed with **students**
4) Information for **school board members** and **parents** about school radon testing
5) Templates for communicating **radon test results** to staff, school board and parents after all phases of testing, and mitigation if needed, is complete
6) A **Final Radon Report** summary to be posted on our school district website
7) Information to encourage staff, school board and parents to test their own homes for radon

See sample talking points, news releases, memos, and poster behind the Action Plan/Communications tab of this plan.


© 2015-2027 Energy Association of Iowa Schools | energyais.org

Appendix A: SRTSS© Flow Chart

School Radon Training & Support System© Flow Chart

A hybrid model created, facilitated, and supported by Energy Association of Iowa Schools

1. Complete School Radon Training & Support System© In-Person Kickoff workshop
2. Determine School Radon Testing Rotation Calendar
3. Communicate with necessary and appropriate audiences
4. Assess building HVAC to ensure it is running efficiently, then...

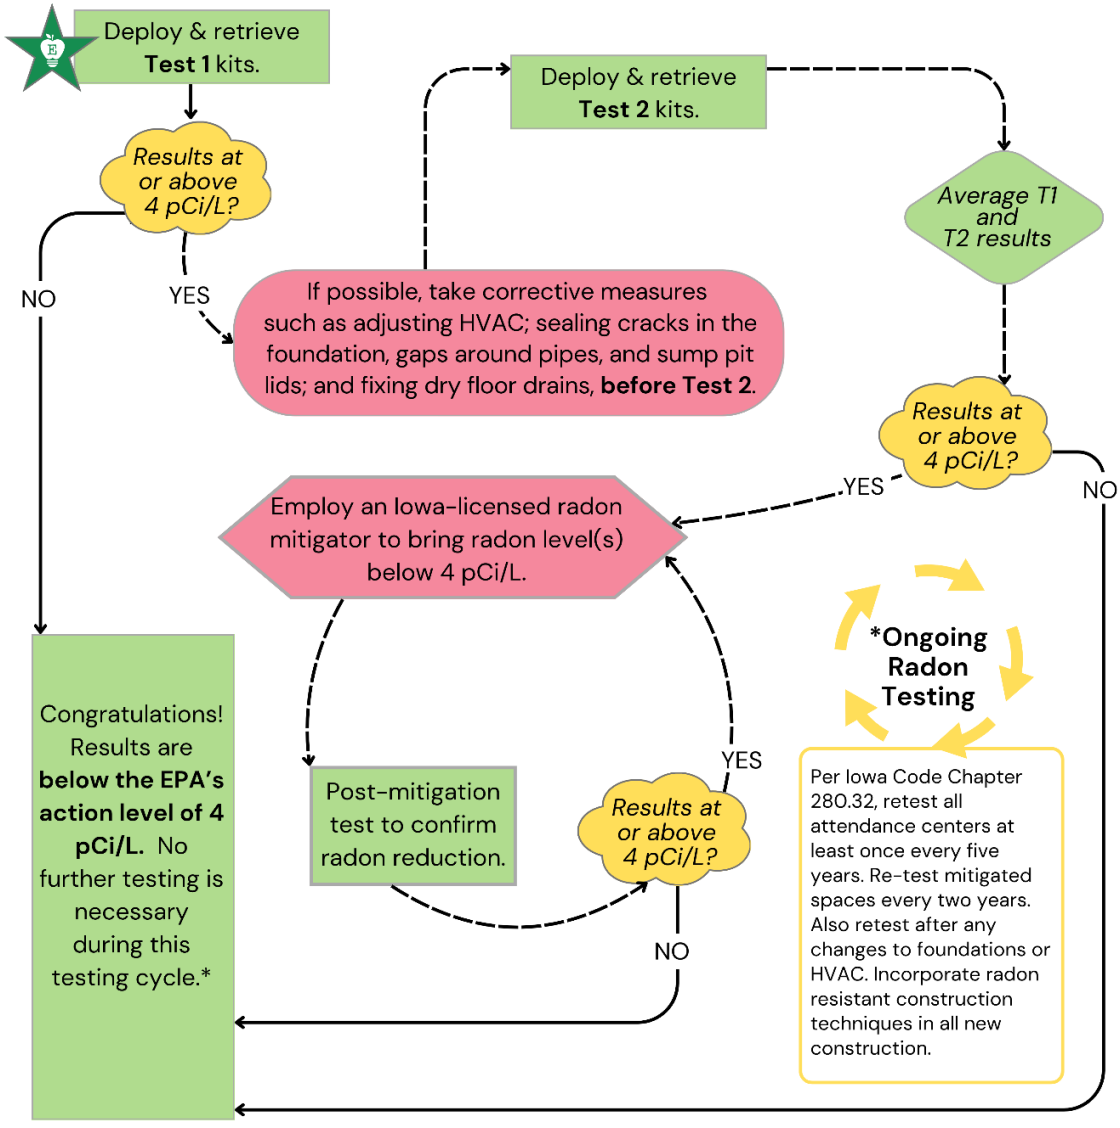

Energy Association of Iowa Schools

The School Radon Training & Support System© (SRTSS) is based upon national radon protocol, best practice, and in-the-trenches experience. The SRTSS© complies with Iowa Code Chapter 280.32, and has been approved by the State of Iowa Health and Human Services department as a Radon Measurement Training Course for Iowa School District Employees, meeting the requirements of IAC 641-43.8 (136B, 280).

© 2015-2027 Energy Association of Iowa Schools | energyais.org

280.32 Radon testing and mitigation.

1. For purposes of this section, *"short-term test"* means a test using a device that remains in an area for two to seven days to determine the amount of radon in the air.

2. The board of directors of each public school district shall establish a radon plan and schedule for short-term tests for radon gas to be performed at each attendance center under its control at least once by July 1, 2027, and at least once every five years thereafter. Each school district shall publish testing results on the district's internet site in a timely manner.

3. Radon testing pursuant to this section conducted on and after July 1, 2022, shall be conducted by a person certified to conduct such testing pursuant to section 136B.1 or by district employees that have completed a school radon testing training program approved by the department of education and the department of health and human services. District employees that have completed training shall not perform testing services in locations other than the employee's employing district. The department of health and human services shall maintain and make available to school districts a list of such approved school radon testing training programs. Testing shall be based on recognized national standards that outline school radon testing practices.

4. *a.* If the results of a short-term test at an attendance center are at or above four picocuries per liter, the board of directors of the public school district shall conduct a second short-term test for radon gas and radon decay products in the spaces with elevated results within sixty days of the first test.

b. If the averaged results of the first and second tests at an attendance center pursuant to paragraph *"a"* are at or above four picocuries per liter, the board of directors of the public school district shall retain or employ a person credentialed pursuant to section 136B.1 to develop a radon mitigation plan that may include further diagnostic testing, corrective measures, and active mitigation. The board shall complete the radon mitigation plan within two years of the first test. A district is not required to mitigate radon at an attendance center if the district intends to abandon the building within five years or has a plan to renovate the attendance center within five years and the renovation will include radon mitigation.

5. All new school construction shall incorporate radon resistant construction techniques.

6. In consultation with appropriate stakeholders and the department of education, the department of health and human services shall adopt rules to administer this section.

2022 Acts, ch 1097, §1, 4; 2023 Acts, ch 19, §1043

Referred to in §423F.3

For provisions relating to certain funding for radon testing, see §423F.3(3)(a)

© 2015–2027 Energy Association of Iowa Schools | energyais.org

Appendix C: EAIS Training Approval Letter

STATE OF IOWA DEPARTMENT OF
Health AND Human
SERVICES

Kim Reynolds
GOVERNOR

Adam Gregg
LT. GOVERNOR

Kelly Garcia
DIRECTOR

July 7, 2023

Julie Weisshaar, Executive Director
Energy Association of Iowa Schools
1735 Kingfisher Ave
Creston IA 50801

RE: Approval of Radon Measurement Training Course for Iowa School District Employees

Dear Ms. Weisshaar

The agency has reviewed your application packet for offering the above referenced training course and find it meets the requirements of IAC 641-43.8(136B,280) and is therefore approved.

Course Name: **School Radon Training & Support System**

Iowa HHS Course Number: **SCHT00002**

The above course name and Iowa HHS course number shall be used when advertising this course and on the course completion certificate.

As a reminder, you are required to provide a course completion certificate that contains, at minimum, the following information; name of the student, the name of the course, Iowa HHS course ID number, name of the course provider, course date(s), number of hours, and the signature and typed name of the training provider(s).

This course availability will be posted on the agencies website and provided to the Iowa Department of Education for dissemination to Iowa school districts.

Please contact me if you have any questions or if you withdraw the availability of this course.

Sincerely,

Randall P. Lane

Randall P. Lane, Radon Program Coordinator
Bureau of Radiological Health
Division of Public Health
(515) 281-4928
randy.lane@idph.iowa.gov

Lucas State Office Building • 321 E 12th St • Des Moines, IA 50319-0075
www.hhs.iowa.gov • 515-281-7689

© 2015-2027 Energy Association of Iowa Schools | energyais.org

Notice to Participants – Disclaimer 1

Radon testing is the first step in knowing if radon mitigation is needed. This guidance does not cover specifics on how to reduce radon or actively mitigate radon in buildings that have elevated radon levels.

According to the EPA, radon can be reduced either by pressurizing and increasing ventilation in the building or venting radon from beneath the building's slab. The School Radon Training & Support System© can help put participating schools in contact with the Iowa-licensed professionals needed to assist with HVAC adjustments, foundation inspection and repair, and, if necessary, active mitigation systems.

Notice to Participants – Disclaimer 2

The School Radon Training & Support System© (SRTSS), created and facilitated by Energy Association of Iowa Schools (EAIS), meets Iowa Code Chapter 280.32: Uniform School Requirements. It has been approved by the State of Iowa Health and Human Services department as a Radon Measurement Training Course for Iowa School District Employees, meeting the requirements of IAC 641-43.8 (136B, 280). SRTSS© is based on the measurement requirements as found in the ANSI/AARST MA-MFLB-2023, *Protocol for Conducting Measurements of Radon and Radon Decay Products in Multifamily, School, Commercial and Mixed-Use Buildings,* as amended to August 1, 2025. Its Iowa HHS Course Number is SCHT00002.

Neither Energy Association of Iowa Schools, nor any affiliated organization, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process or service by trade name, trademark manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by Energy Association of Iowa Schools, nor any affiliated organization. The views and opinions of authors expressed herein do not necessarily state or reflect those of Energy Association of Iowa Schools, nor any affiliated organization.

© 2015-2027 Energy Association of Iowa Schools | energyais.org

Energy Association of Iowa Schools

Team workspace: 301 W. Montgomery Street, Suite 2, Creston, IA 50801
Organization phone: (515) 635-3277 • Web: https://energyais.org

School Radon Training & Support System
2025–26 School District Radon Testing Report

District:	North Polk CSD	**Report Date:**	07/10/2026
Address:	13930 NE 6th St, Alleman, IA, 50007	**Phone:**	5159843400
Superintendent:	Michael Kline	**Email:**	michael.kline@northpolk.org

Congratulations on preventing lung cancer in your school district and meeting the requirements of the Gail Orcutt School Radon Safety Act (Iowa House File 2412) by testing for radon. You now have peace of mind that your students, staff and community are learning in spaces that test below the U.S. Environmental Protection Agency's radon action level of 4.0 pCi/L. Thank you!

This School District Radon Testing Report and attached Radon Testing Results Summary by Building(s) provide a nutshell of test results to share on your website. With this report, your 2025–26 radon testing is officially complete. However your school radon rep, Julie Weisshaar , will continue to be here for you throughout the year to answer any additional questions at juliew@energyais.org or (515) 635-3277.

1.	Does the public school district have a radon plan and schedule for short-term tests for radon gas to be performed at each attendance center under its control at least once by July 1, 2027, and at least once every five years thereafter?	Y
2.	Does the public school publish (radon) testing results on the district's internet site in a timely manner?	Y
3.	Have district employees who conducted testing completed a school radon testing training program approved by the department of education and the department of public health? Name of program: School Radon Training & Support System through Energy Association of Iowa Schools	Y
4.	Were second short-term tests for radon conducted in spaces with results at or above four picocuries per liter within sixty days of the first test?	N/A
5.	Was a radon mitigation plan developed within two years of the first test if averaged results of first and second tests were at or above four picocuries per liter?	N/A
6.	Was the corrective measure(s) and/or active mitigation identified in the developed radon mitigation plan to bring results below 4pCi/l completed within two years.	N/A
7.	All new school construction in our public school district will incorporate radon resistant construction techniques.	Y

Thank you for participating in the 2025–26 School Radon Training & Support System. We hope we have earned the opportunity to work with you again in the future.

The School Radon Training & Support System was developed by Energy Association of Iowa Schools in accordance to Radon Mitigation Standards for Schools and Large Buildings (MALB 2014 with 2021 revisions) from The American National Standards Institute (ANSI) and American Association of Radon Scientists and Technologists (AARST).

© Energy Association of Iowa Schools • https://energyais.org

Radon Testing Results Summary by Building | 1 of 1

Report Date 07/10/2026

Name	HS	**District**	North Polk CSD
Address	13930 NE 6th St IA, Alleman, 50007	**Scope**	☑ All regularly occupied rooms in contact with the ground, or above spaces in contact with the ground, were tested.
Conducted By	June Carstensen	**Phone**	5153700900
# Test Kits Used	59	**Dates**	11/17/2025 - 11/21/2025

Test Results

Test 1:	**# Rooms Tested:**	50	**#Rooms 4.0 pCi/L or above:**	1

Quality Controls

Testing was conducted on weekdays when school was in session. Closed building conditions were maintained. Advanced notification was given to staff, teachers and building managers. Blanks and duplicates were deployed. Routine maintenance including HVAC inspection and service per best practice occurred prior to testing.

Notes

The 1 initial elevation was in a non-frequently occupied space. Re-testing was not necessary.

No further testing is necessary for 5 years or per district's School Radon Plan Testing Rotation Calendar.

Next Steps

Re-test any mitigated spaces every 2 years. Re-test after any major renovations to the building or HVAC systems. Allow Energy Association of Iowa Schools to remind your school district when it's time to once again participate in the School Radon Training & Support System!

The School Radon Training & Support System was developed by Energy Association of Iowa Schools in accordance to Radon Mitigation Standards for Schools and Large Buildings (MALB 2014 with 2021 revisions) from The American National Standards Institute (ANSI) and American Association of Radon Scientists and Technologists (AARST).

© Energy Association of Iowa Schools • https://energyais.org