ADDENDUM 2

BID NO. 25.26.1149
ROOFING SYSTEM REPLACEMENT

This Addendum modifies the original Bid Document dated March 10, 2026, and Addendum No. 2 dated April 9, 2026, as indicated herein. All addenda must be acknowledged in the designated space on the **PROPOSAL FORM/SIGNATURE PAGE**. Failure to do so will render the bid non-responsive.

REVISED BID DEADLINE: Friday, April 17, 2026, no later than 2:00 p.m.

1. **Is there a specific Roof hatch manufacturer that you would like, and would you also like to have the safety rail around as well?**

   ANSWER: SUPERINTENDENT requests the use of the following roof hatch model, or approved equal: **Bilco E-20, 36" × 36" steel roof hatch**. Please refer to the specifications provided in the image on ATTACHMENT A for additional information. **All bidders are required to submit a completed Request for Substitution Form, regardless of whether an "or equal" roof hatch is being proposed. If no substitution is requested, bidders must indicate this by checking the appropriate box and signing the form.** The **SUPERINTENDENT** shall have sole discretion in deciding as to whether a proposed request for Substitution is equal to or better than a Specified Item. A safety rail is not required for this installation.

Please see revised Section 2.4 BID Submission Requirements of the bid document


2.4 BID Submission Requirements

2.4.1 Required Documentation:

Bid Form / Signature Page
Bid Security/Bid Bond(10% of the original bid amount)
Non-Collusion Certification
Contractors Certificate Regarding Workers Compensation
Division of Industrial Relations (DIR) Registration Certification of Contractor and Subcontractor
Certification Regarding Debarment, Suspension, Ineligibility, and Voluntary Exclusion
Drug-Free Workplace Certificate
Alcohol and Tobacco-Free School Policy
Designation of Subcontractors
DVBE Participation Statement
Request for Substitution Form *(Found on Page 3 of Addendum 2)*

All signatures must be original handwritten signatures in blue ink.
Digital signatures, photocopies, and stamped signatures will not be accepted.

ATTACHMENT A

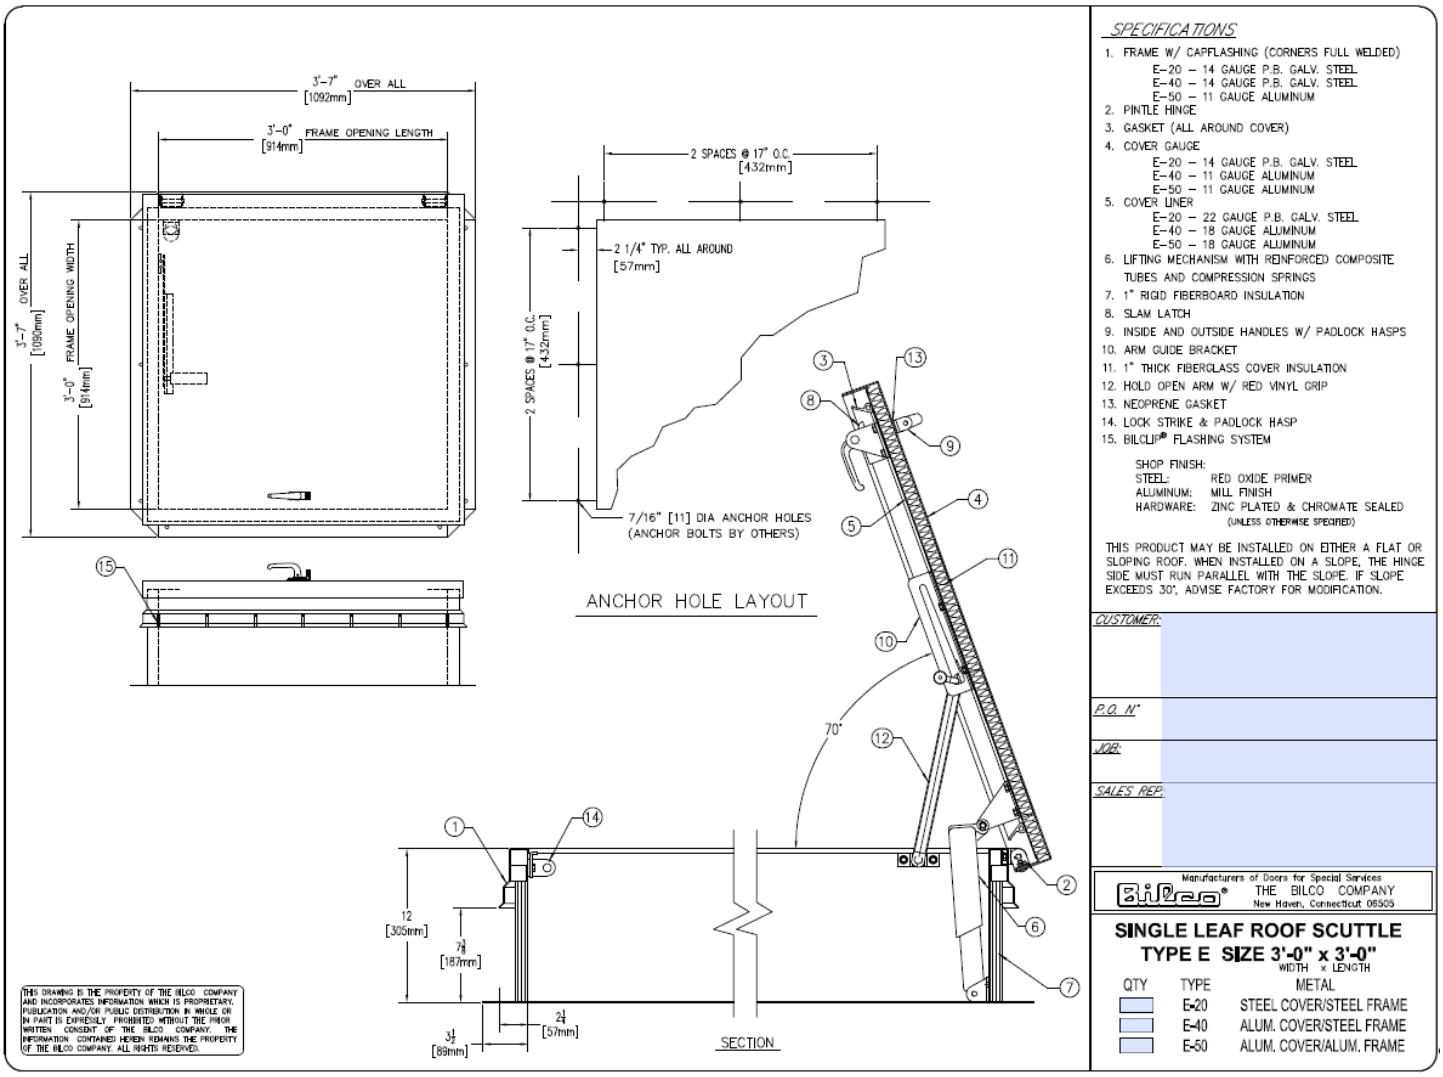

SPECIFICATIONS

1. FRAME W/ CAPFLASHING (CORNERS FULL WELDED)
   E-20 – 14 GAUGE P.B. GALV. STEEL
   E-40 – 14 GAUGE P.B. GALV. STEEL
   E-50 – 11 GAUGE ALUMINUM
2. PINTLE HINGE
3. GASKET (ALL AROUND COVER)
4. COVER GAUGE
   E-20 – 14 GAUGE P.B. GALV. STEEL
   E-40 – 11 GAUGE ALUMINUM
   E-50 – 11 GAUGE ALUMINUM
5. COVER LINER
   E-20 – 22 GAUGE P.B. GALV. STEEL
   E-40 – 18 GAUGE ALUMINUM
   E-50 – 18 GAUGE ALUMINUM
6. LIFTING MECHANISM WITH REINFORCED COMPOSITE TUBES AND COMPRESSION SPRINGS
7. 1" RIGID FIBERBOARD INSULATION
8. SLAM LATCH
9. INSIDE AND OUTSIDE HANDLES W/ PADLOCK HASPS
10. ARM GUIDE BRACKET
11. 1" THICK FIBERGLASS COVER INSULATION
12. HOLD OPEN ARM W/ RED VINYL GRIP
13. NEOPRENE GASKET
14. LOCK STRIKE & PADLOCK HASP
15. BILCLIP® FLASHING SYSTEM

SHOP FINISH:
STEEL: RED OXIDE PRIMER
ALUMINUM: MILL FINISH
HARDWARE: ZINC PLATED & CHROMATE SEALED
(UNLESS OTHERWISE SPECIFIED)

THIS PRODUCT MAY BE INSTALLED ON EITHER A FLAT OR SLOPING ROOF. WHEN INSTALLED ON A SLOPE, THE HINGE SIDE MUST RUN PARALLEL WITH THE SLOPE. IF SLOPE EXCEEDS 30°, ADVISE FACTORY FOR MODIFICATION.

CUSTOMER:

P.O. N°

JOB:

SALES REP:

Manufacturers of Doors for Special Services
BILCO® THE BILCO COMPANY
New Haven, Connecticut 06505

SINGLE LEAF ROOF SCUTTLE
TYPE E SIZE 3'-0" x 3'-0"
WIDTH x LENGTH

QTY	TYPE	METAL
	E-20	STEEL COVER/STEEL FRAME
	E-40	ALUM. COVER/STEEL FRAME
	E-50	ALUM. COVER/ALUM. FRAME

REQUEST FOR SUBSTITUTION FORM

(COMPLETED FORM MUST BE SUBMITTED WITH BID)

An "or equal" product may be substituted; it will be the **SUPERINTENDENT**s sole decision if an "or equal" substitute material meets the required specifications.

☐ CHECK BOX IF THERE ARE NO SUBSTITUTION REQUESTS

REQUESTED ITEM	SUBSTITUTE ITEM	CONTRACTOR AGREES TO PROVIDE SPECIFIED ITEM IF REQUEST TO SUBSTITUTE IS DENIED (CIRCLE ONE)	SUPERINTENDENTS DECISION (CIRCLE ONE)
		YES NO	YES NO
		YES NO	YES NO
		YES NO	YES NO
		YES NO	YES NO
		YES NO	YES NO

BIDDER REPRESENTATIVE SIGNATURE:

_____

DATE: _____

SUPERINTENDENT REVIEWING REPRESENTATIVE SIGNATURE:

_____

DATE: _____