Perfection Air HVAC


Quote

Perfection Air HVAC
2595 Cramer Road
Brogue, PA 17309
Phone: (717)916-2959

Quote Date: 2/13/2025
Terms: Net 30 Days

BILL TO: Pequea Valley School District

Quantity	Units	Description	$/Unit	Amount
		Quote to replace evaporator coil and txv in unit HP-19 at Paradise Elementary. Quote inclues all materials including evaporator coil, txv, nitrogen to pressure test, 13lbs of 410A refigerant, and brazing materials. All labor to remove existing parts, install new parts, pressure test system and pull a vacuum below 500 microns on system, and remove and reinstall ductwork to access the heat pump.		$9,350
			TOTAL	$ 9,350.00

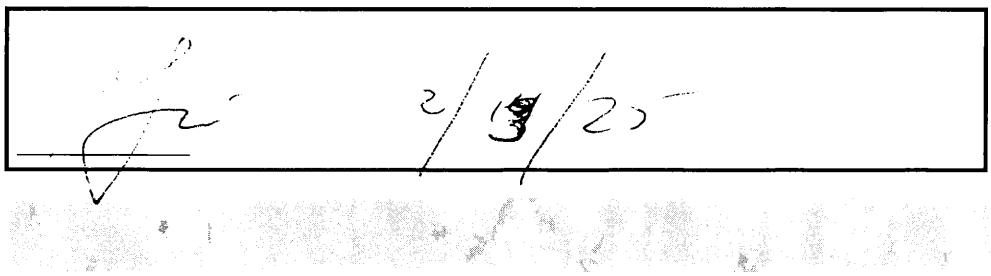



1698 Temple Ave
Lancaster, PA 17603
Phone: 717-826-9097

C/O Gavin Scalyer
Pequea Valley High School
4033 E. Newport Rd
Kinzers, Pa 17535

Project: Field house epoxy floor removal in Men/Ladies restroom and Concession Area

Scope of work:

*Un-install/Remove existing bathroom partitions in each restroom
-Stage in equipment storage

*Remove 17 wall flush commercial toilets and stage as directed

*Grind/remove/dispose of existing epoxy floors in 3 areas as referenced
-Excludes existing epoxy wall base. This area to receive vinyl wall base installation to cover old epoxy

*Grind/polish existing concrete to a 3000 grit resin on all floors

*Supply/Install commercial vinyl wall base. Color TBD

*Re-install all existing toilets with new wax ring and fastening bolts

*Re-install all bathroom partitions as per existing layout

*Shift/move refrigeration coolers within concession space

*Supply necessary hardware/anchors for refastening of partitions

*Final cleaning

Exclusions / terms:
-Replacement of damaged toilet flanges or wall mounted plumbing fixtures if needed
-Vehicle transport or staging of partitions / toilets off site
-Replacement parts for existing partitions
-Work or material not stated above
-Work to be performed during standard business hours

Total project pricing: $26,887.00

Respectfully,
Rob Murphy
D. Ott Construction
Rob@dottconstruction.com 717-808-0397

