BID 718
Dust Collector Installation Re-Bid

Addendum #1

Date: 2/23/26

To All Bidders:


This Addendum Number One (1) shall be considered an integral part of Bid 718 and bidders are hereby notified that they should make adjustments as necessary to account for the information provided in this addendum. It will be assumed that all bids are submitted with full awareness of the modifications and additional information provided herein. Bidders must acknowledge receipt of Addendum #1 by checking the appropriate box on the Bid Proposal form (Item F) included in the Bid Package.

Revised Bid Deadline
The District is hereby revising the Bid Deadline to February 27, 2026 at 2:30 p.m.

Questions and Answers
Several Bidder Clarification Requests were received as of the 2/17/26 deadline. The questions submitted are on the following pages, with the corresponding answers in GREEN.

Date	Firm	Question	Response
2/3/2026	MCM Constructors	Is there an engineer's estimate for the project?	No
2/12/2026	Dust Collector Services, Inc.	During the bid walk thru it was noticed that the explosion membrane on the dust collector has a hole in it. The dust collector will not work properly unless this is fixed. Should a new explosion vent be added to the proposal and will you update the bid requirements to include this?	Proceed as is. The District will review at commencement of work to make a decision.

2/12/2026	Dust Collector Services, Inc.	It was discussed during the walk through that they were not positive where the duct will penetrate the building. My suggestion is to go through the roof as that will be the least expensive way and least structural alteration.	The duct will go through the window. See illustration on next page of this addendum.
2/12/2026	Dust Collector Services, Inc.	Does this project include plumbing and HVAC? I thought it was only for installing the dust collector, concrete pad, and duct for the dust collector but there are sheets with plumbing and HVAC duct as well. Is this to be included in the bid? It was not mentioned in the walk through. Please very the scope of work that is listed The written scope of work just says to install a cold water shut off valve and back flow preventer. Is there additional work.	All the work associated with this bid is indicated in the clouded areas with delta 27 designation as noted in the description of work and shown on CCD 27.
2/12/2026	Dust Collector Services, Inc.	MI-217, DOW 1 I sheet MI-217 there is a note that says make up air through hopper and upper windows. This is not clear if bidder should provide duct from collector through windows or will windows be used for make up air. No details are provided in the plans.	The windows will be used for makeup air.

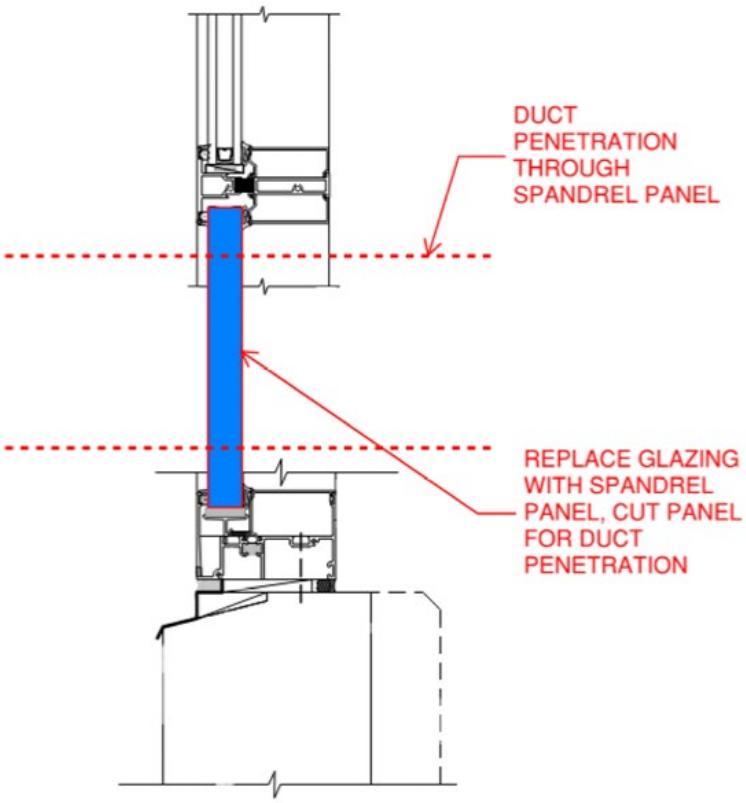

END OF ADDENDUM #1 FOR BID 718 DUST COLLECTOR INSTALLATION RE-BID

All bidders must confirm receipt of all 3 pages of this addendum by signing and dating below and including with your bid submission.

Firm Name:_____

Date:_____ Signature: _____